

# Technical Support Document for the 2006 Effluent Guidelines Program Plan



December 2006

EPA-821R-06-018

---

**TABLE OF CONTENTS**

|  | <b>Page</b> |
|--|-------------|
| PART I: INTRODUCTION.....  | I           |
| 1.0 BACKGROUND.....  | 1-1         |
| 1.1 EPA’s Clean Water Act Program .....  | 1-1         |
| 1.2 Background on the Effluent Guidelines Program.....   | 1-1         |
| 1.3 What are Effluent Guidelines and Pretreatment Standards?.....  | 1-2         |
| 1.3.1 Best Practicable Control Technology Currently Available<br>(BPT) – CWA Sections 301(b)(1)(A) & 304(b)(1) .....                       | 1-4         |
| 1.3.2 Best Conventional Pollutant Control Technology (BCT) –<br>CWA Sections 301(b)(2)(E) & 304(b)(4).....                                 | 1-5         |
| 1.3.3 Best Available Technology Economically Achievable<br>(BAT) – CWA Sections 301(b)(2)(A) & 304(b)(2).....                              | 1-5         |
| 1.3.4 New Source Performance Standards (NSPS) – CWA<br>Section 306.....  | 1-5         |
| 1.3.5 Pretreatment Standards for Existing Sources (PSES) –<br>CWA Section 307(b).....  | 1-5         |
| 1.3.6 Pretreatment Standards for New Sources (PSNS) – CWA<br>Section 307(c) .....  | 1-6         |
| 1.4 Success of EPA’s Effluent Guidelines Program.....  | 1-6         |
| 1.5 What Are EPA’s Effluent Guidelines Planning and Review<br>Requirements?.....   | 1-6         |
| 2.0 PUBLIC COMMENTS ON THE PRELIMINARY EFFLUENT GUIDELINES PROGRAM<br>PLAN FOR 2006 AND FINAL EFFLUENT GUIDELINES PROGRAM PLAN FOR 2004... | 2-1         |
| 3.0 THE EFFLUENT GUIDELINES PLANNING PROCESS .....   | 3-1         |
| 3.1 Goals of the ELG Planning Process.....   | 3-1         |
| 3.2 Annual Review of Existing Effluent Guidelines and Pretreatment<br>Standards.....   | 3-1         |
| 3.2.1 Factors Considered in Review of Existing Effluent<br>Guidelines and Pretreatment Standards .....                                     | 3-1         |
| 3.2.2 Overview: Review of Existing Point Source Categories .....   | 3-5         |
| 3.3 Identification of New Categories of Direct Dischargers for Possible<br>Effluent Guidelines Development.....                            | 3-7         |
| 3.4 Identification of New Categories of Indirect Dischargers for Possible<br>Effluent Guidelines Development.....                          | 3-8         |
| 3.5 Stakeholder Involvement and Schedule.....  | 3-8         |
| 3.6 References.....  | 3-9         |
| 4.0 METHODOLOGY, DATA SOURCES, AND LIMITATIONS.....  | 4-1         |
| 4.1 Data Sources and Limitations .....   | 4-1         |
| 4.1.1 SIC Codes .....  | 4-2         |
| 4.1.2 Toxic Weighting Factors.....   | 4-3         |
| 4.1.3 Calculation of TWPE.....   | 4-3         |

---

## TABLE OF CONTENTS (Continued)

|          | <b>Page</b>  |
|----------|--|
| 4.1.4    | Data from TRI..... 4-3   |
| 4.1.5    | Data from PCS..... 4-6   |
| 4.2      | Methodology Corrections Affecting Both Screening-Level Review<br>Databases ..... 4-9   |
| 4.2.1    | Summary of <i>TRIReleases</i> and <i>PCSLoads</i> Database<br>Methodology Changes ..... 4-9                                      |
| 4.2.2    | Summary of <i>TRIReleases</i> and <i>PCSLoads</i> Database<br>Methodology Comments Resulting in No Changes..... 4-9              |
| 4.2.3    | Revisions to TWF Development..... 4-13   |
| 4.2.4    | Conclusions..... 4-17  |
| 4.3      | Corrections Affecting Only the <i>TRIReleases</i> Databases ..... 4-17   |
| 4.3.1    | TWF Changes for Compound Groups ..... 4-17   |
| 4.3.2    | Database Corrections ..... 4-28  |
| 4.4      | Corrections Affecting Only the <i>PCSLoads</i> Databases..... 4-28   |
| 4.4.1    | Database Corrections ..... 4-28  |
| 4.4.2    | Corrections Made to Steam Electric Power Generating<br>Facilities PCS Discharges ..... 4-29                                      |
| 4.5      | TRI 2002 and 2003 Rankings and PCS 2002 Rankings ..... 4-29  |
| 4.5.1    | Results of the <i>TRIReleases2002</i> , <i>TRIReleases2003</i> , and<br><i>PCSLoads2002</i> Databases ..... 4-29                 |
| 4.5.2    | Data Quality Review of the <i>TRIReleases2002</i> ,<br><i>TRIReleases2003</i> , and <i>PCSLoads2002</i> Databases..... 4-39      |
| 4.6      | References..... 4-43   |
| <br>     |  |
| PART II: | RESULTS OF THE 2006 ANNUAL REVIEW OF INDUSTRIAL<br>CATEGORIES WITH EXISTING ELGS..... II   |
| <br>     |  |
| 5.0      | 2006 ANNUAL REVIEW OF EXISTING EFFLUENT LIMITATIONS GUIDELINES AND<br>STANDARDS AND RANKING OF POINT SOURCE CATEGORIES ..... 5-1 |
| 5.1      | Summary of the Results from the 2005 Annual Review ..... 5-1   |
| 5.2      | Results of the 2006 Screening-Level Review ..... 5-1   |
| 5.2.1    | Facilities for Which EPA is Currently Developing or<br>Revising ELGs ..... 5-2   |
| 5.2.2    | Categories for Which EPA Recently Promulgated or<br>Revised ELGs ..... 5-2   |
| 5.2.3    | Categories with One Facility Dominating the TWPE..... 5-3  |
| 5.2.4    | Results of the 2006 Screening-Level Review ..... 5-5   |
| 5.3      | Prioritization of Categories for the 2006 Annual Review ..... 5-5  |
| 5.3.1    | Detailed Study of Existing ELGs..... 5-11  |
| 5.3.2    | Preliminary Review ..... 5-11  |
| 5.4      | References..... 5-12   |

---

**TABLE OF CONTENTS (Continued)**

|       | <b>Page</b>  |
|-------|--|
| 6.0   | COAL BED METHANE SUBCATEGORY OF THE OIL AND GAS EXTRACTION<br>CATEGORY (40 CFR PART 435) ..... 6-1 |
| 6.1   | Current Applicability of Effluent Limitations Guideline for Oil and<br>Gas Extraction..... 6-1     |
| 6.1.1 | CBM Extraction as a Potential New Subcategory of the Oil<br>and Gas Extraction Category ..... 6-2  |
| 6.1.2 | CBM Industry Current Permitting Practices..... 6-3   |
| 6.2   | Summary of Comments Received Regarding the Coal Bed Methane<br>Industry ..... 6-4                  |
| 6.3   | CBM Industry Profile ..... 6-5   |
| 6.3.1 | Data on CBM-Produced Water Discharges ..... 6-5  |
| 6.3.2 | Future CBM Basin Exploration ..... 6-8   |
| 6.4   | Oil and Gas Extraction Category 2005 Annual Review ..... 6-8                                       |
| 6.5   | CBM Production ..... 6-8   |
| 6.6   | CBM-Produced Water Sources and Characteristics ..... 6-11  |
| 6.6.1 | CBM-Produced Water Pollutants of Concern..... 6-11   |
| 6.6.2 | Adverse Impacts from CBM-Produced Water Discharges..... 6-12                                       |
| 6.7   | CBM-Produced Water Treatment and Disposal ..... 6-13   |
| 6.7.1 | Surface Discharge of CBM-Produced Water..... 6-14  |
| 6.7.2 | Storage/Evaporation Ponds for CBM-Produced Water ..... 6-14  |
| 6.7.3 | Injection of CBM-Produced Water ..... 6-15   |
| 6.7.4 | Hauling with Commercial Disposal of CBM-Produced<br>Water..... 6-16                                |
| 6.7.5 | Technology Options for Beneficial Use and Disposal of<br>CBM-Produced Water ..... 6-16             |
| 6.8   | Cost and Affordability of Treatment Technologies for CBM-<br>Produced Water..... 6-17              |
| 6.9   | CBM Industry Trends ..... 6-18   |
| 6.9.1 | Energy Market Trends ..... 6-18  |
| 6.9.2 | Economic Structure of CBM Operations..... 6-20   |
| 6.10  | CBM Subcategory Conclusions for the 2006 Plan ..... 6-21   |
| 6.11  | CBM Industry References..... 6-22  |
| 7.0   | COAL MINING (40 CFR PART 434)..... 7-1   |
| 7.1   | Coal Mining Category Background ..... 7-1  |
| 7.1.1 | Coal Mining Industry Profile ..... 7-1   |
| 7.1.2 | 40 CFR Part 434..... 7-3   |
| 7.1.3 | Surface Mining Control and Reclamation Act of 1977<br>(SMCRA)..... 7-4                             |
| 7.2   | Coal Mining Category 2005 Annual Review..... 7-5   |
| 7.2.1 | Coal Mining Category 2005 Screening-Level Review ..... 7-5   |
| 7.2.2 | Coal Mining Category 2005 Pollutants of Concern..... 7-5   |
| 7.3   | Coal Mining Category Potential New Subcategories ..... 7-5   |
| 7.4   | Coal Mining Category 2006 Annual Review..... 7-6   |

---

---

**TABLE OF CONTENTS (Continued)**

|       | <b>Page</b>  |
|-------|--|
| 7.5   | Coal Mining Category Conclusions..... 7-6  |
| 7.6   | Coal Mining Category References..... 7-6   |
| 8.0   | FERTILIZER MANUFACTURING (40 CFR PART 418)..... 8-1  |
| 8.1   | Fertilizer Manufacturing Category Background..... 8-1  |
| 8.1.1 | Fertilizer Manufacturing Industry Profile..... 8-1   |
| 8.1.2 | 40 CFR Part 418..... 8-3   |
| 8.2   | Fertilizer Manufacturing Category 2005 Annual Review ..... 8-4                                 |
| 8.2.1 | Fertilizer Manufacturing 2005 Screening-Level Review ..... 8-4                                 |
| 8.2.2 | Fertilizer Manufacturing Category 2005 Pollutants of<br>Concern..... 8-5                       |
| 8.3   | Potential New Subcategories for the Fertilizer Manufacturing<br>Category ..... 8-5             |
| 8.4   | Fertilizer Manufacturing Category 2006 Annual Review ..... 8-6                                 |
| 8.4.1 | Fertilizer Manufacturing Category Facility Classification<br>Revisions..... 8-6                |
| 8.4.2 | Fertilizer Manufacturing Category TWF and POTW Percent<br>Removal Revisions ..... 8-6          |
| 8.4.3 | Fertilizer Manufacturing Category 2006 Screening-Level<br>Review ..... 8-7                     |
| 8.4.4 | Fertilizer Manufacturing Category 2006 Pollutants of<br>Concern..... 8-7                       |
| 8.5   | Fertilizer Manufacturing Category 2006 Top Discharging Facilities..... 8-9                     |
| 8.5.1 | Wet-Process Phosphoric Acid Process Description..... 8-9                                       |
| 8.5.2 | Wastewater Sources of Fluoride ..... 8-10  |
| 8.5.3 | Wastewater Treatment of Fluoride ..... 8-10  |
| 8.5.4 | Top Facility Permit Compliance..... 8-11   |
| 8.6   | Fertilizer Manufacturing Conclusions ..... 8-14  |
| 8.7   | Fertilizer Manufacturing References ..... 8-14   |
| 9.0   | INORGANIC CHEMICALS MANUFACTURING (40 CFR PART 415) ..... 9-1                                  |
| 9.1   | Inorganic Chemicals Category Background ..... 9-1  |
| 9.1.1 | Inorganic Chemicals Industry Profile ..... 9-1   |
| 9.1.2 | 40 CFR Part 415..... 9-2   |
| 9.2   | Inorganic Chemicals 2005 Annual Review ..... 9-3   |
| 9.2.1 | Inorganic Chemicals 2005 Screening-Level Review..... 9-3                                       |
| 9.2.2 | Inorganic Chemicals Category 2005 Pollutants of Concern..... 9-3                               |
| 9.3   | Potential New Subcategories for the Inorganic Chemicals Category..... 9-4                      |
| 9.4   | Inorganic Chemicals Category 2006 Annual Review..... 9-4                                       |
| 9.4.1 | Inorganic Chemicals Category Facility Classification<br>Revisions..... 9-5                     |
| 9.4.2 | Inorganic Chemicals Category Dioxin and Dioxin-Like<br>Compounds Discharge Revisions ..... 9-5 |

---

---

**TABLE OF CONTENTS (Continued)**

|        | <b>Page</b>  |
|--------|--|
| 9.4.3  | Inorganic Chemicals Category TWF and POTW Percent<br>Removal Revisions ..... 9-5               |
| 9.4.4  | Inorganic Chemicals Category 2006 Screening-Level<br>Review ..... 9-7                          |
| 9.4.5  | Inorganic Chemicals Category 2006 Pollutants of Concern..... 9-7                               |
| 9.5    | Inorganic Chemicals Category Dioxin and Dioxin-Like Compounds<br>Discharges..... 9-9           |
| 9.6    | Titanium Dioxide Manufacturing Subcategory ..... 9-11  |
| 9.6.1  | Titanium Dioxide Manufacturing Industry Profile ..... 9-11                                     |
| 9.6.2  | 40 CFR Part 415 Subpart V ..... 9-12   |
| 9.6.3  | Titanium Dioxide Manufacturing Process Description ..... 9-13                                  |
| 9.6.4  | Titanium Dioxide Wastewater Sources of Dioxin and<br>Dioxin-Like Compounds ..... 9-16          |
| 9.6.5  | Dioxide and Dioxide-Like Compounds Wastewater<br>Treatment and Pollution Prevention ..... 9-23 |
| 9.7    | Inorganic Chemicals Category Conclusions..... 9-23   |
| 9.8    | Inorganic Chemicals Category References..... 9-25  |
| 10.0   | NONFERROUS METALS MANUFACTURING (40 CFR PART 421)..... 10-1                                    |
| 10.1   | NFMM Category Background ..... 10-1  |
| 10.1.1 | NFMM Industry Profile ..... 10-1   |
| 10.1.2 | 40 CFR Part 421..... 10-3  |
| 10.2   | NFMM Category 2005 Annual Review..... 10-3   |
| 10.2.1 | NFMM Category 2005 Screening-Level Review ..... 10-3   |
| 10.2.2 | NFMM Category 2005 Pollutants of Concern..... 10-3   |
| 10.3   | Potential New Subcategories for the NFMM Category ..... 10-4                                   |
| 10.4   | NFMM Category 2006 Annual Review..... 10-4   |
| 10.4.1 | NFMM Category Facility Classification Revisions..... 10-4                                      |
| 10.4.2 | NFMM Category Facility Discharge Revisions ..... 10-6  |
| 10.4.3 | NFMM Category TWF and POTW Percent Removal<br>Revisions..... 10-7                              |
| 10.4.4 | NFMM Category 2006 Screening-Level Review ..... 10-7   |
| 10.4.5 | NFMM Category 2006 Pollutants of Concern..... 10-7   |
| 10.4.6 | NFMM Category 2006 Top Discharging Facilities ..... 10-9                                       |
| 10.5   | Primary Aluminum Subcategory ..... 10-9  |
| 10.5.1 | Primary Aluminum Industry Profile ..... 10-9   |
| 10.5.2 | 40 CFR Part 421 Subpart B ..... 10-14  |
| 10.5.3 | Primary Aluminum 2006 Pollutants of Concern ..... 10-14  |
| 10.5.4 | Primary Aluminum Wastewater Sources of Fluoride..... 10-16                                     |
| 10.5.5 | Primary Aluminum Wastewater Sources of Cyanide ..... 10-17                                     |
| 10.6   | NFMM Category Conclusions..... 10-22   |
| 10.7   | NFMM Category References..... 10-22  |

---

---

**TABLE OF CONTENTS (Continued)**

|        | <b>Page</b>   |
|--------|---|
| 11.0   | ORGANIC CHEMICALS, PLASTICS, AND SYNTHETIC FIBERS (40 CFR PART 414)..... 11-1 |
| 11.1   | OCPSF Category Background..... 11-1   |
| 11.1.1 | OCPSF Industry Profile..... 11-1  |
| 11.1.2 | 40 CFR Part 414..... 11-2   |
| 11.1.3 | Previous Detailed Study Findings for the OCPSF Category..... 11-2             |
| 11.2   | OCPSF Category 2005 Annual Review..... 11-6                                   |
| 11.2.1 | OCPSF Category 2005 Screening-Level Review..... 11-6                          |
| 11.2.2 | OCPSF Category 2005 Pollutants of Concern..... 11-7                           |
| 11.3   | Potential New Subcategories for the OCPSF Category..... 11-8                  |
| 11.4   | OCPSF Category 2006 Annual Review..... 11-8                                   |
| 11.4.1 | OCPSF Category Facility Discharge Revisions..... 11-8                         |
| 11.4.2 | OCPSF Category TWF and POTW Percent Removal Revisions..... 11-9               |
| 11.4.3 | OCPSF Category 2006 Screening-Level Review..... 11-10                         |
| 11.4.4 | OCPSF Category 2006 Pollutants of Concern..... 11-10                          |
| 11.5   | OCPSF Category HCB Discharges..... 11-12                                      |
| 11.5.1 | OCPSF Category HCB Discharges in TRI..... 11-12                               |
| 11.5.2 | OCPSF Category HCB Discharges in PCS..... 11-12                               |
| 11.6   | OCPSF Category Dioxin and Dioxin-Like Compounds Discharges... 11-14           |
| 11.7   | OCPSF Category PACs Discharges..... 11-18                                     |
| 11.7.1 | OCPSF Facilities Reporting PACs to TRI..... 11-19                             |
| 11.7.2 | OCPSF Facilities Reporting Benzo(a)pyrene Discharges to PCS..... 11-21        |
| 11.8   | OCPSF Water Conservation through Mass-Based Permit Limits..... 11-22          |
| 11.9   | OCPSF Category Conclusions..... 11-22   |
| 11.10  | OCPSF Category References..... 11-23  |
| 12.0   | ORE MINING AND DRESSING (40 CFR PART 440)..... 12-1                           |
| 12.1   | Ore Mining Category Background..... 12-1                                      |
| 12.1.1 | Ore Mining Industry Profile..... 12-1   |
| 12.1.2 | 40 CFR Part 440..... 12-1   |
| 12.2   | Ore Mining Category 2005 Annual Review..... 12-4                              |
| 12.2.1 | Ore Mining 2005 Screening-Level Review..... 12-4                              |
| 12.2.2 | Ore Mining Category 2005 Pollutants of Concern..... 12-4                      |
| 12.3   | Potential New Subcategories for the Ore Mining Category..... 12-4             |
| 12.4   | Ore Mining Category 2006 Annual Review..... 12-4                              |
| 12.4.1 | Ore Mining Category Facility Classification Revisions..... 12-5               |
| 12.4.2 | Ore Mining Category 2006 Screening-Level Review..... 12-5                     |
| 12.4.3 | Ore Mining Category 2006 Pollutants of Concern..... 12-6                      |
| 12.5   | Ore Mining Category Stormwater Multi-Sector General Permits (MSGP)..... 12-6  |
| 12.6   | Ore Mining Category Conclusions..... 12-8                                     |

---

---

**TABLE OF CONTENTS (Continued)**

|        | <b>Page</b>  |
|--------|--|
| 12.7   | Ore Mining Category References ..... 12-8  |
| 13.0   | PESTICIDE CHEMICALS (40 CFR PART 455) ..... 13-1   |
| 13.1   | Pesticide Chemicals Category Background ..... 13-1   |
| 13.1.1 | Pesticide Chemicals Industry Profile ..... 13-1  |
| 13.1.2 | 40 CFR Part 455 ..... 13-4   |
| 13.2   | Pesticide Chemicals Category 2005 Annual Review ..... 13-7                                 |
| 13.2.1 | Pesticide Chemicals Category 2005 Screening-Level<br>Review ..... 13-7                     |
| 13.2.2 | Pesticides Chemicals Category 2005 Pollutants of<br>Concern ..... 13-7                     |
| 13.3   | Potential New Subcategories for the Pesticide Chemicals Category ..... 13-7                |
| 13.4   | Pesticide Chemicals Category 2006 Annual Review ..... 13-9                                 |
| 13.4.1 | Pesticide Chemicals Category 2006 Screening-Level<br>Review ..... 13-9                     |
| 13.4.2 | Pesticide Chemicals Category 2006 Pollutants of Concern .... 13-9                          |
| 13.4.3 | Pesticide Chemicals Category Picloram Discharges ..... 13-11                               |
| 13.4.4 | Pesticide Chemicals Category Total Carbaryl Discharges ... 13-12                           |
| 13.5   | Pesticide Chemicals Category Conclusions ..... 13-13                                       |
| 13.6   | Pesticide Chemicals Category References ..... 13-13  |
| 14.0   | PETROLEUM REFINING (40 CFR PART 419) ..... 14-1  |
| 14.1   | Petroleum Refining Category Background ..... 14-1  |
| 14.1.1 | Petroleum Refining Industry Profile ..... 14-1   |
| 14.1.2 | 40 CFR Part 419 ..... 14-3   |
| 14.2   | Petroleum Refining Category 2005 Annual Review ..... 14-3                                  |
| 14.2.1 | Petroleum Refining Category 2005 Screening Level<br>Review ..... 14-3                      |
| 14.2.2 | Petroleum Refining Category 2005 Pollutants of Concern .... 14-3                           |
| 14.3   | Potential New Subcategories for the Petroleum Refining Category ..... 14-4                 |
| 14.4   | Petroleum Refining 2006 Annual Review ..... 14-5   |
| 14.4.1 | Petroleum Refining Category TWF and POTW Percent<br>Removal Revisions ..... 14-5           |
| 14.4.2 | Petroleum Refining Category 2006 Screening-Level<br>Review ..... 14-6                      |
| 14.4.3 | Petroleum Refining Category 2006 Pollutants of Concern .... 14-6                           |
| 14.5   | Petroleum Refining Category Update on Pollutants of Concern ..... 14-6                     |
| 14.5.1 | Petroleum Refining Category Dioxin and Dioxin-Like<br>Compound Discharges ..... 14-8       |
| 14.5.2 | Petroleum Refining Category Polycyclic Aromatic<br>Compounds (PACs) Discharges ..... 14-10 |
| 14.5.3 | Petroleum Refining Category Metals Discharges ..... 14-11                                  |
| 14.5.4 | Petroleum Refining Category Sulfide Discharges ..... 14-13                                 |

---

---

**TABLE OF CONTENTS (Continued)**

|        | <b>Page</b>   |
|--------|---|
| 14.5.5 | Petroleum Refining Category Pollution Control Technologies ..... 14-13          |
| 14.6   | Petroleum Refining Category Conclusions..... 14-13                              |
| 14.7   | Petroleum Refining References ..... 14-14                                       |
| 15.0   | PLASTICS MOLDING AND FORMING (40 CFR PART 463) ..... 15-1                       |
| 15.1   | PMF Category Background ..... 15-1  |
| 15.1.1 | PMF Industry Profile ..... 15-1   |
| 15.1.2 | 40 CFR Part 463..... 15-2   |
| 15.1.3 | 40 CFR Part 63 Subpart UUUU..... 15-2   |
| 15.2   | PMF Category 2005 Annual Review ..... 15-3                                      |
| 15.2.1 | PMF Category 2005 Screening-Level Review ..... 15-3                             |
| 15.2.2 | PMF Category 2005 Pollutants of Concern ..... 15-4                              |
| 15.2.3 | PMF Category Cellulose Products Facilities 2005 Pollutants of Concern..... 15-6 |
| 15.3   | Potential New Subcategories for the PMF Category ..... 15-6                     |
| 15.4   | PMF Category 2006 Annual Review ..... 15-6                                      |
| 15.4.1 | PMF Category Facility Discharge Revisions..... 15-6                             |
| 15.4.2 | PMF Category TWF and POTW Percent Removal Revisions..... 15-7                   |
| 15.4.3 | PMF Category 2006 Screening-Level Review ..... 15-8                             |
| 15.4.4 | PMF Category 2006 Pollutants of Concern ..... 15-8                              |
| 15.5   | Regenerated Cellulose Products Discussion ..... 15-10                           |
| 15.5.1 | Regenerated Cellulose Process Description..... 15-10                            |
| 15.5.2 | Regenerated Cellulose Facility Information ..... 15-12                          |
| 15.5.3 | Wastewater Sources of Carbon Disulfide ..... 15-15                              |
| 15.5.4 | Regenerated Cellulose Facilities Wastewater Treatment .... 15-16                |
| 15.6   | PMF Category Conclusions ..... 15-16  |
| 15.7   | PMF References..... 15-17   |
| 16.0   | PORCELAIN ENAMELING (40 CFR PART 466)..... 16-1                                 |
| 16.1   | Porcelain Enameling Category Background..... 16-1                               |
| 16.1.1 | Porcelain Enameling Industry Profile..... 16-1                                  |
| 16.1.2 | 40 CFR Part 466..... 16-2   |
| 16.2   | Porcelain Enameling Category 2005 Annual Review ..... 16-2                      |
| 16.2.1 | Porcelain Enameling Category 2005 Screening-Level Review ..... 16-3             |
| 16.2.2 | Porcelain Enameling Category 2005 Facility Classification Revisions..... 16-3   |
| 16.2.3 | Porcelain Enameling Category 2005 Revised Screening-Level Review ..... 16-4     |
| 16.3   | Potential New Subcategories for the Porcelain Enameling Category.... 16-5       |
| 16.4   | Porcelain Enameling Category 2006 Annual Review ..... 16-5                      |
| 16.5   | Porcelain Enameling Category Conclusions..... 16-8                              |

---

---

**TABLE OF CONTENTS (Continued)**

|        | <b>Page</b>  |
|--------|--|
| 16.6   | Porcelain Enameling Category References..... 16-9                                  |
| 17.0   | RUBBER MANUFACTURING (40 CFR PART 428)..... 17-1                                   |
| 17.1   | Rubber Manufacturing Category Background..... 17-1                                 |
| 17.1.1 | Rubber Manufacturing Industry Profile..... 17-1                                    |
| 17.1.2 | 40 CFR Part 428..... 17-3  |
| 17.2   | Rubber Manufacturing Category 2005 Annual Review ..... 17-4                        |
| 17.2.1 | Rubber Manufacturing Category 2005 Screening-Level<br>Review ..... 17-4            |
| 17.2.2 | Rubber Manufacturing Category 2005 Pollutants of<br>Concern..... 17-4              |
| 17.3   | Potential New Subcategories for the Rubber Manufacturing<br>Category ..... 17-4    |
| 17.4   | Rubber Manufacturing Category 2006 Annual Review ..... 17-5                        |
| 17.4.1 | Rubber Manufacturing Category Facility Discharge<br>Revisions..... 17-5            |
| 17.4.2 | Rubber Manufacturing Category TWF and POTW Percent<br>Removal Revisions ..... 17-6 |
| 17.4.3 | Rubber Manufacturing Category 2006 Screening-Level<br>Review ..... 17-6            |
| 17.4.4 | Rubber Manufacturing Category 2006 Pollutants of<br>Concern..... 17-7              |
| 17.5   | Rubber Manufacturing Category Conclusions..... 17-7                                |
| 17.6   | Rubber Manufacturing Category References..... 17-9                                 |
| 18.0   | TEXTILE MILLS (40 CFR PART 410)..... 18-1  |
| 18.1   | Textile Mills Point Source Category Background..... 18-1                           |
| 18.1.1 | Textiles Industry Profile ..... 18-1   |
| 18.1.2 | 40 CFR Part 410..... 18-2  |
| 18.2   | Textiles Category 2005 Annual Review ..... 18-5                                    |
| 18.2.1 | Textiles Category 2005 Screening-Level Review ..... 18-5                           |
| 18.2.2 | Textiles Category 2005 Pollutants of Concern ..... 18-5                            |
| 18.3   | Potential New Subcategories for the Textiles Category ..... 18-6                   |
| 18.4   | Textiles Category 2006 Annual Review ..... 18-7                                    |
| 18.4.1 | Textiles Category TWF and POTW Percent Removal<br>Revisions..... 18-7              |
| 18.4.2 | Textiles Category 2006 Screening-Level Review ..... 18-7                           |
| 18.4.3 | Textiles Category Pollutants of Concern ..... 18-7                                 |
| 18.4.4 | Textiles Category Sulfide Discharges..... 18-9                                     |
| 18.4.5 | Textiles Category Chlorine Discharges ..... 18-10                                  |
| 18.5   | Textiles Category Conclusions ..... 18-13  |
| 18.6   | Textiles Category References ..... 18-13   |

---

**TABLE OF CONTENTS (Continued)**

|  | <b>Page</b> |
|--|-------------|
| PART III: REVIEW OF INDUSTRIAL DISCHARGES NOT COVERED BY CATEGORICAL REGULATIONS .....   | III         |
| 19.0 REVIEW OF INDIRECT DISCHARGERS WITHOUT CATEGORICAL PRETREATMENT STANDARDS TO IDENTIFY POTENTIAL NEW CATEGORIES FOR PRETREATMENT STANDARDS ..... | 19-1        |
| 19.1 Overview of EPA’s 2006 Review of Possible New Candidates for Categorical Pretreatment Standards .....   | 19-1        |
| 19.2 EPA’s Evaluation of "Pass Through Potential" of Toxic and Nonconventional Pollutants through POTW Operations.....                               | 19-2        |
| 19.3 EPA’s Evaluation of “Interference Potential” of Industrial Indirect Discharges.....   | 19-3        |
| 19.4 Category-Specific Evaluations.....  | 19-4        |
| 19.5 Food Service Establishments .....   | 19-5        |
| 19.5.1 Comments Received .....   | 19-5        |
| 19.5.2 Industry Profile .....  | 19-5        |
| 19.5.3 Wastewater Characteristics.....   | 19-7        |
| 19.5.4 Pass Through and Interference.....  | 19-7        |
| 19.5.5 Findings of EPA’s Review of the Food Services Establishments Industry .....   | 19-9        |
| 19.6 Health Services Industry .....  | 19-9        |
| 19.6.1 Comments Received .....   | 19-9        |
| 19.6.2 Industry Profile .....  | 19-10       |
| 19.6.3 Wastewater Characteristics.....   | 19-10       |
| 19.6.4 Pass Through and Interference Potential .....   | 19-11       |
| 19.6.5 Findings of EPA’s CWA Sections 304(g) and 307(b) Review of the Health Services Industry.....  | 19-11       |
| 19.7 Independent and Stand-Alone Laboratories.....   | 19-12       |
| 19.7.1 Comments Received .....   | 19-12       |
| 19.7.2 Industry Profile .....  | 19-12       |
| 19.7.3 Wastewater Characteristics.....   | 19-13       |
| 19.7.4 Pass Through and Interference Potential .....   | 19-13       |
| 19.7.5 Findings of EPA’s CWA Sections 304(g) and 307(b) Review of the Independent and Stand-Alone Laboratories Industry .....                        | 19-14       |
| 19.8 Industrial Container and Drum Cleaning.....   | 19-14       |
| 19.8.1 Comments Received .....   | 19-14       |
| 19.8.2 Industry Profile .....  | 19-14       |
| 19.8.3 Wastewater Characteristics.....   | 19-15       |
| 19.8.4 ICDC On-Site Wastewater Pretreatment .....  | 19-16       |
| 19.8.5 Pass Through and Interference Potential .....   | 19-17       |
| 19.8.6 Findings of EPA’s Review of the ICDC Industry .....   | 19-17       |

---

---

**TABLE OF CONTENTS (Continued)**

|  | <b>Page</b> |
|--|-------------|
| 19.9 Industrial Laundries .....  | 19-18       |
| 19.9.1 Comments Received .....   | 19-18       |
| 19.9.2 Industry Profile .....  | 19-19       |
| 19.9.3 Wastewater Characteristics .....  | 19-19       |
| 19.9.4 Pass Through and Interference Potential .....   | 19-20       |
| 19.9.5 Findings of EPA’s Review of the Industrial Laundries<br>Industry .....  | 19-21       |
| 19.10 Photoprocessing .....  | 19-21       |
| 19.10.1 Comments Received .....  | 19-21       |
| 19.10.2 Industry Profile .....   | 19-21       |
| 19.10.3 Wastewater Characteristics .....   | 19-22       |
| 19.10.4 Wastewater Treatment and Pollution Prevention .....  | 19-23       |
| 19.10.5 Pass Through and Interference Potential .....  | 19-23       |
| 19.10.6 Findings of EPA’s Review of the Photoprocessing<br>Industry .....  | 19-23       |
| 19.11 Printing and Publishing .....  | 19-24       |
| 19.11.1 Comments Received .....  | 19-24       |
| 19.11.2 Industry Profile .....   | 19-24       |
| 19.11.3 Wastewater Characteristics .....   | 19-25       |
| 19.11.4 Wastewater Treatment and Pollution Prevention .....  | 19-26       |
| 19.11.5 Pass Through and Interference Potential .....  | 19-26       |
| 19.11.6 Findings of EPA’s Review of the Printing and Publishing<br>Industry .....  | 19-26       |
| 19.12 Tobacco Products .....   | 19-27       |
| 19.12.1 Comments Received .....  | 19-27       |
| 19.12.2 Industry Profile .....   | 19-28       |
| 19.12.3 Wastewater Characteristics .....   | 19-28       |
| 19.12.4 Wastewater Treatment .....   | 19-29       |
| 19.12.5 Pass Through and Interference Potential .....  | 19-29       |
| 19.12.6 Findings of EPA’s Review of the Tobacco Products<br>Industry .....   | 19-30       |
| 19.13 References .....   | 19-30       |
| 20.0 REVIEW OF DIRECT DISCHARGERS WITHOUT EFFLUENT LIMITATIONS GUIDELINES<br>TO IDENTIFY POTENTIAL NEW REGULATORY CATEGORIES FOR EFFLUENT<br>GUIDELINES RULEMAKING ..... | 20-1        |
| 20.1 Liquefied Natural Gas Import Terminals .....  | 20-1        |
| 20.1.1 Comments Received .....   | 20-1        |
| 20.1.2 Category/Subcategory Analysis .....   | 20-2        |
| 20.1.3 Industry Profile .....  | 20-2        |
| 20.1.4 Economic Profile .....  | 20-15       |
| 20.1.5 Summary of EPA’s Review of the LNG Industry .....   | 20-21       |
| 20.2 Miscellaneous Foods and Beverages Industry .....  | 20-21       |
| 20.2.1 Summary of Comments Received .....  | 20-22       |

---

**TABLE OF CONTENTS (Continued)**

|  | <b>Page</b> |
|--|-------------|
| 20.2.2 Industry Profile .....  | 20-22       |
| 20.2.3 Wastewater Characteristics .....  | 20-24       |
| 20.2.4 SIC Code 2075: Soybean Oil Mills .....                                  | 20-25       |
| 20.2.5 SIC Code 2082: Malt Beverages.....                                      | 20-29       |
| 20.2.6 SIC Code 2085: Distilled, Rectified, and Blended<br>Liquors .....       | 20-30       |
| 20.2.7 Summary of Review of Miscellaneous Foods and<br>Beverages Industry..... | 20-32       |
| 20.3 References.....   | 20-32       |

**LIST OF APPENDICES**

- Appendix A POINT SOURCE CATEGORY TO SIC CODE CROSSWALK
- Appendix B SIC CODES OF FACILITIES WITH DISCHARGE DATA IN TRI AND/OR PCS THAT EPA IDENTIFIED AS “NOT A CATEGORY”
- Appendix C TOXIC WEIGHTING FACTORS FOR CHEMICALS REPORTED AS WATER DISCHARGES IN THE 2002 TRI, 2003 TRI, OR 2002 PCS
- Appendix D POTW REMOVAL RATES FOR TRI CHEMICALS REPORTED AS DISCHARGED TO POTWS IN THE 2002 AND 2003 TRI
- Appendix E MANUAL DATABASE CHANGES MADE TO CREATE *TRIReleases2002\_v4*
- Appendix F MANUAL DATABASE CHANGES MADE TO CREATE *TRIReleases2003\_v2*
- Appendix G MANUAL DATABASE CHANGES MADE TO CREATE *PCSLoads2002\_v4*
- Appendix H 2006 ANNUAL REVIEW RESULTS: 4-DIGIT SIC CODE RANKINGS FOR *TRIReleases2002\_v4*
- Appendix I 2006 ANNUAL REVIEW RESULTS: 4-DIGIT SIC CODE RANKINGS FOR *PCSLoads2002\_v4*
- Appendix J 2006 ANNUAL REVIEW RESULTS: 4-DIGIT SIC CODE RANKINGS FOR *TRIReleases2003\_v2*
- Appendix K 2006 ANNUAL REVIEW RESULTS: CHEMICAL RANKINGS FOR *TRIReleases2002\_v4*
- Appendix L 2006 ANNUAL REVIEW RESULTS: CHEMICAL RANKINGS FOR *PCSLoads2002\_v4*
- Appendix M 2006 ANNUAL REVIEW RESULTS: CHEMICAL RANKINGS FOR *TRIReleases2003\_v2*

## LIST OF TABLES

|      |  | Page |
|------|--|------|
| 2-1  | Comments on the Preliminary 2006 and Final 2004 Effluent Guidelines Program Plans EPA Docket Number: EPA-HQ-OW-2004-0032 .....                 | 2-2  |
| 4-1  | Summary of Database Changes Applicable to Both <i>TRIRelases</i> and <i>PCSLoads</i> Based on Database Methodology Comments .....              | 4-10 |
| 4-2  | Summary of Comments on Database Methodologies Applicable to Both <i>TRIRelases</i> and <i>PCSLoads</i> for Which EPA Did Not Take Action ..... | 4-12 |
| 4-3  | TWFs Revised in 2006.....  | 4-14 |
| 4-4  | Chemicals with the Largest Change in TWPE in <i>PCSLoads2002</i> Resulting from 2006 Revised TWFs.....   | 4-15 |
| 4-5  | Chemicals with the Largest Changes in TWPE for TRI Databases Resulting from 2006 Revised TWFs.....   | 4-16 |
| 4-6  | Dioxin and Dioxin-Like Compounds and Their Toxic Weighting Factors .....   | 4-19 |
| 4-7  | Chemical Composition of Creosote and Associated TWFs.....  | 4-21 |
| 4-8  | Definition of Polycyclic Aromatic Compounds .....  | 4-22 |
| 4-9  | Calculation of Toxic Weighting Factor for Petroleum PACs.....  | 4-24 |
| 4-10 | Calculation of Toxic Weighting Factor for Wood Preserving PACs .....   | 4-27 |
| 4-11 | Calculation of Toxic Weighting Factor for Pulp, Paper, and Paperboard PACs .....   | 4-28 |
| 4-12 | <i>TRIRelases2002_v4</i> Category Rankings from the 2006 Screening-Level Review .....  | 4-30 |
| 4-13 | <i>PCSLoads2002_v4</i> Category Rankings from the 2006 Screening-Level Review .....  | 4-33 |
| 4-14 | <i>TRIRelases2003_v2</i> Category Rankings from the 2006 Screening-Level Review .....  | 4-36 |
| 4-15 | TRI Facility Review.....   | 4-40 |
| 4-16 | Loadings and TWPE from Different Measurement Values for a Subset of PCS Data.....  | 4-42 |
| 4-17 | Nutrient Analysis Data Quality Issues.....   | 4-43 |

## LIST OF TABLES (Continued)

|     | <b>Page</b>   |
|-----|---|
| 5-1 | Point Source Categories That Have Undergone a Recent Rulemaking or Review ..... 5-3   |
| 5-2 | Point Source Categories with One Facility Dominating the TWPE Discharges..... 5-4   |
| 5-3 | Final PCS 2002 and TRI 2002 Combined Point Source Category Rankings..... 5-6  |
| 5-4 | Final TRI 2003 Rankings..... 5-8  |
| 5-5 | 2006 Annual Review of Categories with Existing ELGs: Level of Review..... 5-9   |
| 6-1 | Applicability of Subcategories in the Oil and Gas Extraction Category ..... 6-2   |
| 6-2 | United States CBM Sources and Production ..... 6-6  |
| 6-3 | Water Production from CBM Extraction..... 6-11  |
| 6-4 | CBM-Produced Water TDS Concentrations..... 6-12   |
| 6-5 | Concentration of Pollutants in CBM-Produced Water by Basin ..... 6-13   |
| 6-6 | Produced Water Disposal Methods in Major CBM Basins ..... 6-14  |
| 6-7 | Potential Treatment Technologies for Beneficial Use and Disposal for CBM-Produced Water ..... 6-16  |
| 6-8 | 2006 Estimates of Annualized Costs for Managing CBM-Produced Water in the Powder River Basin ..... 6-17                                     |
| 6-9 | 2003 Estimates of Cost and Affordability of Treatment and Disposal Technologies for CBM-Produced Water in the Powder River Basin ..... 6-19 |
| 7-1 | Number of Facilities in Coal Mining SIC Codes..... 7-2  |
| 7-2 | Number of Permitted U.S. Coal Mining Operations and Production in 2004 ..... 7-2  |
| 7-3 | U.S. Coal Production in 2003 and Predictions to 2030 (In Millions of Short Tons)..... 7-3   |
| 7-4 | Coal Mining ELGs..... 7-3   |
| 7-5 | BPT and BAT Effluent Guidelines for Coal Mining Part 434 Subparts A – F ..... 7-4   |
| 7-6 | Catastrophic Precipitation Event Exemption of 40 CFR Part 434..... 7-4  |

## LIST OF TABLES (Continued)

|      | <b>Page</b>  |
|------|--|
| 7-7  | Coal Mining Category 2005 Screening-Level Review Results ..... 7-5                                       |
| 8-1  | Top Facilities Reporting Under SIC Code 2874..... 8-2  |
| 8-2  | Number of Facilities in Fertilizer Manufacturing SIC Codes..... 8-2                                      |
| 8-3  | Fertilizer Manufacturing Category Facilities by Type of Discharge Reported<br>in TRI 2002..... 8-3       |
| 8-4  | Subcategories in the Fertilizer Category..... 8-4  |
| 8-5  | Fertilizer Manufacturing Category 2005 Screening-Level Review Results <sup>a</sup> ..... 8-4             |
| 8-6  | 2005 Annual Review: Fertilizer Manufacturing Category Pollutants of<br>Concern..... 8-5                  |
| 8-7  | Impact of Changes to TWF and POTW Percent Removal for the Fertilizer<br>Manufacturing Category ..... 8-7 |
| 8-8  | Fertilizer Manufacturing Category 2006 Screening-Level Review Results <sup>a</sup> ..... 8-7             |
| 8-9  | 2006 Annual Review: Fertilizer Manufacturing Category Pollutants of<br>Concern..... 8-8                  |
| 8-10 | 2006 Annual Review: Fertilizer Manufacturing Category Top Discharging<br>Facilities in PCS..... 8-9      |
| 8-11 | Fertilizer Manufacturing Category, Top Fluoride Outfalls..... 8-12                                       |
| 8-12 | Fertilizer Manufacturing Category, Permit Flow Requirements ..... 8-13                                   |
| 9-1  | Number of Facilities in Inorganic Chemicals Manufacturing SIC Codes ..... 9-2                            |
| 9-2  | Inorganic Chemicals Category Facilities by Type of Discharge Reported in<br>TRI 2002 ..... 9-2           |
| 9-3  | Inorganic Chemicals Category 2005 Screening-Level Review Results ..... 9-3                               |
| 9-4  | 2005 Annual Review: Inorganic Chemicals Category Pollutants of Concern..... 9-4                          |
| 9-5  | Inorganic Chemicals Category Facilities with Discharge Revisions..... 9-6                                |
| 9-6  | Impact of Changes to TWF and POTW Percent Removal for the Inorganic<br>Chemicals Category ..... 9-6      |
| 9-7  | Inorganic Chemicals Category 2006 Screening-Level Review ..... 9-7                                       |

## LIST OF TABLES (Continued)

|      | <b>Page</b>  |
|------|--|
| 9-8  | 2006 Annual Review: Inorganic Chemicals Category Pollutants of Concern <sup>a</sup> ..... 9-8  |
| 9-9  | Inorganic Chemicals Category Facilities Reporting Discharges of Dioxin and Dioxin-like Compounds to TRI ..... 9-10   |
| 9-10 | Comparison of TRI TWPE from Dioxin and Dioxin-Like Compounds for 2002 and 2003 for the Titanium Dioxide Subcategory, OCPSF Category, and CCH Rulemaking ..... 9-11 |
| 9-11 | United States Titanium Dioxide Manufacturers ..... 9-12  |
| 9-12 | Titanium Dioxide Subcategory BPT and NSPS Monthly Average Limitations ..... 9-12   |
| 9-13 | Titanium Dioxide Manufacturing Processes ..... 9-13  |
| 9-14 | Titanium Dioxide Facility List and Inventory of Data Available for Dioxin and Dioxin-Like Compounds ..... 9-18   |
| 9-15 | Concentrations of Dioxin and Dioxin-Like Compounds in Effluent Samples (pg/L) for Louisiana Pigments ..... 9-21  |
| 9-16 | Concentrations of Dioxin and Dioxin-Like Compounds in Effluent Samples (pg/L) from Two Du Pont Facilities ..... 9-22   |
| 9-17 | TWPE Comparison for Three Titanium Dioxide Manufacturers ..... 9-23  |
| 9-18 | Titanium Dioxide Facilities Wastewater Treatment In Place and Pollution Prevention ..... 9-24  |
| 10-1 | Number of Facilities in NFMM SIC Codes ..... 10-2  |
| 10-2 | NFMM Category Facilities by Type of Discharge Reported in TRI 2002 ..... 10-2  |
| 10-3 | NFMM Category 2005 Screening-Level Review Results ..... 10-3   |
| 10-4 | 2005 Annual Review: NFMM Category Pollutants of Concern ..... 10-4   |
| 10-5 | NFMM Category Facilities Classified in Wrong Category ..... 10-5   |
| 10-6 | NFMM Category Facilities with Discharge Revisions ..... 10-6   |
| 10-7 | Impact of Changes to TWF and POTW Percent Removal for the NFMM Category ..... 10-7   |

## LIST OF TABLES (Continued)

|       | <b>Page</b>   |
|-------|---|
| 10-8  | NFMM Category 2006 Screening-Level Review Results ..... 10-7                                |
| 10-9  | 2006 Annual Review: NFMM Category Pollutants of Concern..... 10-8                           |
| 10-10 | 2006 Annual Review: NFMM Category Top Discharging Facilities in<br>PCS ..... 10-10          |
| 10-11 | Top Discharging NFMM Category Facilities..... 10-11   |
| 10-12 | U.S. Primary Aluminum Facilities Owners and Operating Status..... 10-13                     |
| 10-13 | Primary Aluminum Subcategory BAT Treatment Effectiveness<br>Concentrations ..... 10-14      |
| 10-14 | 2006 Annual Review: Primary Aluminum Subcategory Pollutants of<br>Concern..... 10-15        |
| 10-15 | Primary Aluminum Facilities with Fluoride Discharges in PCS for 2002 ..... 10-18            |
| 10-16 | Primary Aluminum Facilities, Fluoride Concentrations Reported to PCS<br>in 2002 ..... 10-19 |
| 10-17 | Primary Aluminum Facilities with Cyanide Discharges in PCS for 2002..... 10-20              |
| 10-18 | Primary Aluminum Facilities, Cyanide Concentrations Reported to PCS<br>in 2002 ..... 10-21  |
| 11-1  | Number of Facilities in OCPSF SIC Codes..... 11-3   |
| 11-2  | OCPSF Category Facilities by Type of Discharge Reported in TRI 2002..... 11-4               |
| 11-3  | Applicability of Subcategories in the OCPSF Category..... 11-5                              |
| 11-4  | OCPSF Category 2005 Screening-Level Review Results ..... 11-7                               |
| 11-5  | 2005 Annual Review Results: OCPSF Category Pollutants of Concern..... 11-7                  |
| 11-6  | Pollutant TWPE for Potential New Subcategories in OCPSF Category ..... 11-8                 |
| 11-7  | Impact of Changes to TWF and POTW Percent Removal for the OCPSF<br>Category ..... 11-10     |
| 11-8  | OCPSF Category 2006 Screening-Level Review Results ..... 11-10                              |
| 11-9  | 2006 Annual Review: OCPSF Category Pollutants of Concern..... 11-11                         |

## LIST OF TABLES (Continued)

|       | <b>Page</b>  |
|-------|--|
| 11-10 | OCPSF Facilities Reporting HCB Releases to TRI..... 11-12  |
| 11-11 | OCPSF Facilities Reporting Discharges of HCB to PCS in 2002 ..... 11-13                          |
| 11-12 | OCPSF Facilities Reporting Dioxin Releases to TRI..... 11-15                                     |
| 11-13 | OCPSF Facilities Reporting PACs Releases to TRI..... 11-20                                       |
| 11-14 | OCPSF Facilities for which PCS includes Benzo(a)pyrene 2002 Discharge<br>Data..... 11-21         |
| 12-1  | Number of Facilities in Ore Mining SIC Codes ..... 12-2  |
| 12-2  | Ore Mining Category Facilities by Type of Discharge Reported in<br>TRI 2002 ..... 12-2           |
| 12-3  | Ore Mining Category Subcategory Applicability ..... 12-3   |
| 12-4  | Ore Mining Category 2005 Screening-Level Review Results..... 12-4                                |
| 12-5  | 2005 Annual Review: Ore Mining Category Pollutants of Concern ..... 12-5                         |
| 12-6  | Ore Mining Category 2006 Screening-Level Review Results..... 12-6                                |
| 12-7  | 2006 Annual Review: Ore Mining Category Pollutants of Concern ..... 12-7                         |
| 13-1  | Number of Facilities with Pesticide Chemicals Discharges Listed by Primary<br>SIC Code..... 13-3 |
| 13-2  | Pesticide Chemicals Category Facilities by Type of Discharge Reported in<br>TRI 2002 ..... 13-5  |
| 13-3  | Applicability of Subcategories in the Pesticide Chemicals Point Source<br>Category ..... 13-6    |
| 13-4  | Pesticide Chemical Category 2005 Screening-Level Review Results..... 13-7                        |
| 13-5  | 2005 Annual Review: Pesticide Chemicals Category Pollutants of<br>Concern ..... 13-8             |
| 13-6  | Pesticide Chemicals Category 2006 Screening-Level Review Results ..... 13-9                      |
| 13-7  | 2006 Annual Review: Pesticide Chemicals Category Pollutants of<br>Concern ..... 13-10            |
| 13-8  | Pesticide Chemicals Category Picloram Discharges ..... 13-11                                     |

## LIST OF TABLES (Continued)

|       | <b>Page</b>   |
|-------|---|
| 13-9  | Estimated Picloram Concentrations in Dow Chemical Co. Freeport Facility's Final Effluent ..... 13-12                |
| 13-10 | Pesticide Chemicals Category Total Carbaryl Discharges in PCS 2002 ..... 13-12                                      |
| 14-1  | Number of Facilities in Petroleum Refining SIC Codes..... 14-2  |
| 14-2  | Petroleum Refining Category Facilities by Type of Discharge Reported in TRI 2002 ..... 14-2                         |
| 14-3  | Petroleum Refining Category 2005 Screening-Level Review Results ..... 14-3  |
| 14-4  | 2005 Annual Review: Petroleum Refining Category Pollutants of Concern ..... 14-4                                    |
| 14-5  | Petroleum Refining Category Potential New Subcategories Pollutant TWPE..... 14-5                                    |
| 14-6  | Impact of Changes to TWF and POTW Percent Removal for the Petroleum Refining Category ..... 14-5                    |
| 14-7  | Petroleum Refining Category 2006 Screening-Level Review Results ..... 14-6  |
| 14-8  | 2006 Annual Review: Petroleum Refining Category Pollutants of Concern .... 14-7                                     |
| 14-9  | Petroleum Refineries that Based Dioxin and Dioxin-Like Compound Discharges on Analytical Measurement Data..... 14-9 |
| 14-10 | Petroleum Refineries that have Detected PACs in Refinery Effluent ..... 14-11                                       |
| 14-11 | 2000, 2002, and 2003 Dioxin Discharges Reported to TRI by Petroleum Refineries ..... 14-17                          |
| 14-12 | 2000, 2002, and 2003 PACs Discharges Reported to TRI by Petroleum Refineries ..... 14-20                            |
| 15-1  | Number of Facilities in Plastics Molding and Forming SIC Codes..... 15-1  |
| 15-2  | PMF Category 2005 Screening-Level Review Results ..... 15-4   |
| 15-3  | 2005 Annual Review: PMF Category Pollutants of Concern..... 15-5  |
| 15-4  | 2005 Annual Review: PMF Category Discharges Excluding Cellulose Products Manufacturers ..... 15-6                   |
| 15-5  | PCS Database Changes for Innovia Films Inc..... 15-7  |

## LIST OF TABLES (Continued)

|       | <b>Page</b>  |
|-------|--|
| 15-6  | Impact of Changes to TWF and POTW Percent Removal for the PMF Category ..... 15-8  |
| 15-7  | PMF Category 2006 Screening-Level Review Results ..... 15-8  |
| 15-8  | 2006 Annual Review: PMF Category Pollutants of Concern ..... 15-9  |
| 15-9  | Sealed Air Corporation Cryovac Division Dioxin and Dioxin-Like Compounds Discharges ..... 15-10                                    |
| 15-10 | Cellulose Manufacturers in the United States ..... 15-13   |
| 15-11 | TRI 2002 and 2003 Discharges for Cellulose Products Manufacturing Facilities ..... 15-14   |
| 15-12 | TRI 2002 and 2003 Carbon Disulfide Discharges for Cellulose Products Manufacturing Facilities ..... 15-14                          |
| 15-13 | PCS 2002 Discharges for Cellulose Products Manufacturing Facilities ..... 15-15  |
| 15-14 | Cellulose Products Facilities Wastewater Treatment ..... 15-16   |
| 16-1  | Number of Facilities in Porcelain Enameling SIC Codes ..... 16-2   |
| 16-2  | Porcelain Enameling Category Subcategory Applicability ..... 16-2  |
| 16-3  | Porcelain Enameling Category 2005 Screening-Level Review Results ..... 16-3  |
| 16-4  | 2005 Annual Review Results: Number of Facilities in Porcelain Enameling SIC Codes ..... 16-4                                       |
| 16-5  | Porcelain Enameling Category 2005 Revised Screening-Level Review Results ..... 16-5  |
| 16-6  | 2006 Screening-Level Review Results: Classification of Facilities in Porcelain Enameling and Metal Finishing Categories ..... 16-6 |
| 16-7  | Porcelain Enameling Category 2006 Screening-Level Review Results ..... 16-8  |
| 17-1  | Number of Facilities in Rubber Manufacturing SIC Codes ..... 17-2  |
| 17-2  | Rubber Manufacturing Category Facilities by Type of Discharge Reported in TRI 2002 ..... 17-2                                      |
| 17-3  | Rubber Manufacturing Category Subcategory Applicability ..... 17-3   |

## LIST OF TABLES (Continued)

|       | <b>Page</b>  |
|-------|--|
| 17-4  | Rubber Manufacturing Category 2005 Screening-Level Review Results ..... 17-4   |
| 17-5  | 2005 Annual Review: Rubber Manufacturing Category Pollutants of Concern ..... 17-5   |
| 17-6  | Impact of Changes to TWF and POTW Percent Removal for the Rubber Manufacturing Category ..... 17-6   |
| 17-7  | Rubber Manufacturing Category 2006 Screening-Level Review Results ..... 17-7   |
| 17-8  | 2006 Annual Review: Rubber Manufacturing Category Pollutants of Concern ..... 17-8   |
| 18-1  | Number of Facilities in Textiles SIC Major Groups ..... 18-1   |
| 18-2  | Textiles Category Facilities by Type of Discharge Reported in TRI 2002 ..... 18-2  |
| 18-3  | Applicability of Subcategories in the Textiles Category ..... 18-3   |
| 18-4  | Pollutants Regulated by Existing Textiles ELGs ..... 18-4  |
| 18-5  | Textiles Category 2005 Screening-Level Review Results ..... 18-5   |
| 18-6  | 2005 Annual Review: Textiles Category Pollutants of Concern ..... 18-6   |
| 18-7  | Pollutant Loadings From Potential New Subcategories for the Textile Category ..... 18-6  |
| 18-8  | Impact of Changes to TWF and POTW Percent Removal for the Textiles Category ..... 18-7   |
| 18-9  | Textiles Category 2006 Screening-Level Review Results ..... 18-7   |
| 18-10 | 2006 Annual Review: Textiles Category Pollutants of Concern ..... 18-8   |
| 18-11 | Top Facilities Reporting Sulfide Discharges in <i>PCSLoads2002_v4</i> ..... 18-9   |
| 18-12 | Concentration Data Available for Top Four Facilities Reporting Sulfide Discharges in <i>PCSLoads2002</i> for the Textiles Category ..... 18-10 |
| 18-13 | Facilities With Largest Chlorine Discharges in <i>PCSLoads2002_v4</i> ..... 18-11  |
| 18-14 | Chlorine Limitations and PCS Concentration Data for Burlington Industries Cordova, NC Textile Mill ..... 18-12                                 |

## LIST OF TABLES (Continued)

|       | <b>Page</b>   |
|-------|---|
| 19-1  | Industries Included in EPA's 2006 Review of Possible New Candidates for Categorical Pretreatment Standards ..... 19-1 |
| 19-2  | Summary of EPA's 2006 CWA Sections 304(g) and 307(b) Review ..... 19-6  |
| 19-3  | Summary of Wastewater Discharges from the Food Service Establishments Industry ..... 19-7                             |
| 19-4  | Summary of Wastewater Discharges from the Independent and Stand-Alone Laboratories Industry ..... 19-13               |
| 19-5  | Estimated Number of ICDC Facilities, by Discharge and Treatment ..... 19-16   |
| 19-6  | Estimated Pollutant Loads Discharged by 187 ICDC Facilities ..... 19-17   |
| 19-7  | Pollutant Discharges from Industrial Laundry Facilities (Measured as TWPE) ..... 19-20                                |
| 19-8  | Summary of Wastewater Discharges from the Photoprocessing Industry ..... 19-22  |
| 19-9  | Summary of Wastewater Discharges from the Printing and Publishing Industry ..... 19-26                                |
| 20-1  | Existing Land-Based and Offshore LNG Import Terminals ..... 20-6  |
| 20-2  | Approved U.S. Land-Based LNG Import Terminals ..... 20-9  |
| 20-3  | Proposed U.S. Land-Based LNG Import Terminals ..... 20-11   |
| 20-4  | Licensed and Proposed U.S. Offshore LNG Import Terminals ..... 20-12  |
| 20-5  | Existing, Approved, Proposed and Planned U.S. LNG Import Terminals (2006) ..... 20-14                                 |
| 20-6  | Number of Facilities in Miscellaneous Foods and Beverages SIC Codes ..... 20-23                                       |
| 20-7  | Miscellaneous Foods and Beverages Facilities by Type of Discharge Reported in TRI 2002 ..... 20-24                    |
| 20-8  | Summary of Data for the Miscellaneous Foods and Beverages Industry ..... 20-24  |
| 20-9  | TRI and PCS Data Listing for Miscellaneous Foods and Beverages SIC Codes ..... 20-26                                  |
| 20-10 | Pollutants of Concern for the Miscellaneous Foods and Beverages Industry ..... 20-27                                  |

**LIST OF TABLES (Continued)**

|       | <b>Page</b>  |
|-------|--|
| 20-11 | Pollutants of Concern for the Miscellaneous Foods and Beverages Industry,<br>SIC Code 2075: Soybean Oil Mills ..... 20-28                        |
| 20-12 | Pollutants of Concern for the Miscellaneous Foods and Beverages Industry,<br>SIC Code 2082: Malt Beverages..... 20-30                            |
| 20-13 | Pollutants of Concern for the Miscellaneous Foods and Beverages Industry,<br>SIC Code 2085: Distilled, Rectified, and Blended Liquors..... 20-31 |

---

**LIST OF FIGURES**

|      |  | <b>Page</b> |
|------|--|-------------|
| 1-1  | Regulations of Direct and Indirect Wastewater Discharges Under NPDES.....                              | 1-4         |
| 3-1  | Flow Chart of Annual Review of Existing ELGs .....   | 3-2         |
| 3-2  | Flow Chart of Further Review of Existing ELGs .....  | 3-3         |
| 3-3  | Flow Chart of Identification of Possible New ELGs .....  | 3-4         |
| 6-1  | Coal Bed Methane Basins in the United States .....   | 6-7         |
| 6-2  | Profile of a Typical Western CBM Well with Openhole Completion.....                                    | 6-10        |
| 6-3  | EIA Predicted Natural Gas Production by Source, 1990-2030 (tcf).....                                   | 6-18        |
| 9-1  | Basic Diagram of the Chloride and Chloride-Ilmenite Processes for<br>Titanium Dioxide Manufacture..... | 9-14        |
| 9-2  | Basic Diagram of the Sulfate Process for Titanium Dioxide Manufacture .....                            | 9-17        |
| 20-1 | General Description of LNG Importation.....  | 20-3        |
| 20-2 | Existing and Proposed North American LNG Terminals .....   | 20-7        |
| 20-3 | Potential North American LNG Terminals.....  | 20-13       |
| 20-4 | Existing and Proposed North American LNG Terminals .....   | 20-15       |
| 20-5 | Excess Regas Capacity in the U.S.—Here to Stay .....   | 20-18       |
| 20-6 | Growth in LNG Imports Given Growth in Alaskan and Unconventional<br>Gas Production.....                | 20-20       |

---

**LIST OF ACRONYMS**

|                  |   |
|------------------|---|
| 2005 SLA Report  | 2005 Annual Screening-Level Analysis Report                       |
| ACC              | American Chemistry Council  |
| ACWA             | Airport Clean Water Alliance                                      |
| API              | American Petroleum Institute                                      |
| BAT              | Best available technology economically achievable                 |
| Bbl              | Barrel  |
| Bcfd             | Billion cubic feet per day  |
| BCT              | Best conventional pollutant control technology                    |
| BMP              | Best management practice  |
| BNR              | Biological treatment with nutrient removal                        |
| BOD <sub>5</sub> | Biochemical oxygen demand   |
| BPJ              | Best professional judgment  |
| BPT              | Best practicable pollutant control technology currently available |
| CAFOs            | Concentrated animal feeding operations                            |
| CAS              | Chemical Abstracts Service  |
| CBM              | Coal bed methane  |
| CCH              | Chlorine and chlorinated hydrocarbons                             |
| CDDs             | Polychlorinated dibenzo-p-dioxins                                 |
| CDFs             | Polychlorinated dibenzofurans                                     |
| CFPR             | Chemical formulation, packaging, and repackaging                  |
| CFR              | Code of Federal Regulations                                       |
| CMOM             | Capacity, management, operations, and maintenance                 |
| CMP              | Code of Management Practices                                      |
| COD              | Chemical oxygen demand  |
| CSO              | Combined sewer overflow   |
| CWA              | Clean Water Act   |
| CWT              | Centralized waste treaters  |
| DAP              | Diammonium phosphate  |
| DCN              | Document control number   |
| DMR              | Discharge monitoring report                                       |
| DOE              | Department of Energy  |
| EAD              | Engineering Analysis Division                                     |
| EC               | Electrical conductivity   |
| EDC              | Endocrine disrupting compound                                     |
| EDS              | Effluent data statistics  |
| EIA              | Energy Information Administration                                 |
| ELGs             | Effluent limitations guidelines and standards                     |
| EPA              | Environmental Protection Agency                                   |
| EPCRA            | Emergency Planning and Community-Right-to-Know Act                |
| FERC             | Federal Energy Regulatory Commission                              |
| FOG              | Fats, oil, and grease   |
| HAP              | Hazardous air pollutant   |
| HCB              | Hexachlorobenzene   |
| HpCDD            | Heptachlorodibenzo-p-dioxin                                       |
| HpCDF            | Heptachlorodibenzofuran   |

## LIST OF ACRONYMS (Continued)

---

|                 |  |
|-----------------|--|
| HxCDD           | Hexachlorodibenzo-p-dioxin                                       |
| HxCDF           | Hexachlorodibenzofuran   |
| ICDC            | Industrial container and drum cleaning                           |
| ICR             | Information collection request                                   |
| IMCC            | Interstate Mining Compact Commission                             |
| LNG             | Liquefied natural gas  |
| MAP             | Monoammonium phosphate   |
| MCES            | Metropolitan Council of Environmental Services                   |
| Mcf             | Million cubic feet   |
| MGD             | Million gallons per day  |
| MGY             | Million gallons per year   |
| ML              | Minimum level  |
| MMBtu           | Million British thermal units                                    |
| MSD             | Metropolitan Sewerage District of Greater Cincinnati             |
| MSGP            | Multi-sector general permit                                      |
| NACWA           | National Association of Clean Water Agencies                     |
| NAICS           | North American Industry Classification System                    |
| NCASI           | National Council for Air and Stream Improvement                  |
| NACWA           | National Association of Clean Water Agencies                     |
| NEC             | Not elsewhere classified   |
| NESHAP          | National Emission Standards for Hazardous Air Pollutants         |
| NFMM            | Nonferrous metals manufacturing                                  |
| NOAA            | National Oceanic and Atmospheric Administration                  |
| NOI             | Notice of intent   |
| NOIA            | National Ocean Industries Association                            |
| NPDES           | National Pollutant Discharge Elimination System                  |
| NRDC            | National Resources Defense Council                               |
| NSPS            | New sources pollutant standards                                  |
| OAQPS           | Office of Air Quality Planning and Standards                     |
| OCDD            | Octachlorodibenzo-p-dioxin                                       |
| OCDF            | Octachlorodibenzofuran   |
| OCPSF           | Organic chemicals, plastics, and synthetic fibers                |
| OECA            | Office of Enforcement and Compliance Assurance                   |
| OMB             | Office of Management and Budget                                  |
| ORV             | Open rack vaporizers   |
| OSMRE           | Office of Surface Mining and Regulatory Enforcement              |
| OSW             | Office of Solid Waste  |
| PAC             | Polycyclic aromatic compound                                     |
| PBST            | Petroleum bulk station terminals                                 |
| PBT             | Persistent bioaccumulative toxic                                 |
| PCBs            | Polychlorinated biphenyls  |
| PCS             | Permit Compliance System   |
| <i>PCSLoads</i> | EPA database estimating annual pollutant loads based on PCS data |
| PDS             | Preliminary data summary   |
| PE              | Porcelain enameling  |
| PeCDD           | Pentachlorodibenzo-p-dioxin                                      |

---

---

**LIST OF ACRONYMS (Continued)**

|                    |   |
|--------------------|---|
| PeCDF              | Pentachlorodibenzofuran   |
| PHC                | Probable hydrologic consequences                                  |
| PMF                | Plastics molding and forming                                      |
| POTW               | Publicly-owned treatment works                                    |
| PSES               | Pretreatment standards for existing sources                       |
| PSNS               | Pretreatment standards for new sources                            |
| PVC                | Polyvinyl chloride  |
| RIPA               | Reusable Industrial Packaging Association                         |
| SAR                | Sodium adsorption ratio   |
| SBA                | Small Business Administration                                     |
| SCV                | Submerged combustion vaporizer                                    |
| SIC                | Standard Industrial Classification                                |
| SIU                | Significant industrial user                                       |
| SMCRA              | Surface Mining Control and Reclamation Act                        |
| SSO                | Sanitary sewer overflow   |
| TCDD               | Tetrachlorodibenzo-p-dioxin                                       |
| TCDF               | Tetrachlorodibenzofuran   |
| TCEQ               | Texas Commission on Environmental Quality                         |
| TCF                | Trillion cubic feet   |
| TDD                | Technical development document                                    |
| TDS                | Total dissolved solids  |
| TEC                | Transportation equipment cleaning                                 |
| TEF                | Toxic equivalency factor  |
| TEQ                | Toxic equivalent  |
| TMDL               | Total maximum daily load  |
| TOC                | Total organic carbon  |
| TRC                | Total residual chlorine   |
| TRI                | Toxic Release Inventory   |
| <i>TRIReleases</i> | EPA database estimating annual pollutant loads based on TRI data. |
| TRSA               | Textile Rental Service Association                                |
| TSD                | Technical support document  |
| TSS                | Total suspended solids  |
| TTB                | U.S. Alcohol and Tobacco Tax and Trade Bureau                     |
| TWF                | Toxic weighting factor  |
| TWPE               | Toxic-weighted pound equivalent                                   |
| UIC                | Underground injection control                                     |
| USCG               | U.S. Coast Guard  |
| UTSA               | Uniform and Textile Service Association                           |
| VCM                | Vinyl chloride monomer  |

# **PART I: INTRODUCTION**

*This document provides the data supporting the Final 2006 Effluent Guidelines Program Plan. It presents the methodology used to perform the reviews of industrial discharges required by the Clean Water Act and the results of the reviews.*

## **1.0 BACKGROUND**

This section explains how the Effluent Guidelines Program fits into the CWA Program, describes the general and legal background of the Effluent Guidelines Program, and describes EPA's process for making effluent guidelines revision and development decisions (i.e., effluent guideline planning).

### **1.1 EPA's Clean Water Act Program**

EPA's Office of Water is responsible for developing the programs and tools authorized under the CWA, which provides EPA and the states with a variety of programs and tools to protect and restore the Nation's waters. These programs and tools generally rely either on water-quality-based controls, such as water quality standards and water-quality-based permit limitations, or technology-based controls such as effluent guidelines and technology-based permit limitations.

The CWA gives states the primary responsibility for establishing, reviewing, and revising water quality standards. These consist of designated uses for each water body (e.g., fishing, swimming, supporting aquatic life), numeric pollutant concentration limits ("criteria") to protect those uses, and an antidegradation policy. EPA develops national criteria for many pollutants, which states may adopt or modify as appropriate to reflect local conditions. In a parallel track to water quality standards, EPA also develops technology-based effluent limitation guidelines and standards, which are factor-based regulations that provide effluent limits based on current available technologies. These limits are then incorporated into technology-based permits. While technology-based permits may, in fact, result in meeting state water quality standards, the effluent guidelines program is not specifically designed to ensure that the discharge from each facility meets the water quality standards for that particular water body. For this reason, the CWA also requires states to establish water-quality-based permit limitations, where necessary to attain and maintain water quality standards, that require industrial facilities to meet requirements that are more stringent than those in a national effluent guideline regulation. Consequently, in the overall context of the CWA, effluent guidelines must be viewed as one tool in the broad arsenal of tools Congress provided to EPA and the states to protect and restore the Nation's water quality.

### **1.2 Background on the Effluent Guidelines Program**

The 1972 CWA marked a distinct change in Congress's efforts "to restore and maintain the chemical, physical, and biological integrity of the Nation's waters." See CWA § 101(a), 33 U.S.C. § 1251(a). Prior to 1972, the CWA relied on "water quality standards." This approach was challenging, however, because it was very difficult to prove that a specific discharger was responsible for decreasing the water quality of its receiving stream.

Since 1972, the CWA has directed EPA to promulgate effluent guidelines that reflect pollutant reductions that can be achieved by categories or subcategories of industrial point

sources. The effluent guidelines are based on specific technologies (including process changes) that EPA identifies as meeting the statutorily prescribed level of control. See CWA sections 301(b)(2), 304(b), 306, 307(b), and 307(c). Unlike other CWA tools, effluent guidelines are national in scope and establish pollution control obligations for all facilities that discharge wastewater within an industrial category or subcategory. In establishing these controls, EPA assesses: (1) the performance and availability of the best pollution control technologies or pollution prevention practices that are available for an industrial category or subcategory as a whole; (2) the economic achievability of those technologies, which can include consideration of costs, effluent reduction benefits, and affordability of achieving the reduction in pollutant discharge; (3) non-water-quality environmental impacts (including energy requirements), and (4) such other factors as the Administrator deems appropriate.

Creating a single national pollution control requirement for each industrial category based on the best technology the industry could afford was seen by Congress as a way to reduce the potential creation of “pollution havens” and to set the Nation’s sights on attaining the highest possible level of water quality. Consequently, EPA’s goal in establishing national effluent guidelines is to assure that industrial facilities with similar characteristics, regardless of their location or the nature of their receiving water, will at a minimum meet similar effluent limitations representing the performance of the best pollution control technologies or pollution prevention practices.

Unlike other CWA tools, effluent guidelines also provide the opportunity to promote pollution prevention and water conservation. This may be particularly important in controlling persistent, bioaccumulative, and toxic pollutants discharged in concentrations below analytic detection levels. Effluent guidelines also control pollutant discharges at the point of discharge from industrial facilities and cover discharges directly to surface water (direct discharges) and discharges to publicly-owned treatment works (POTWs) (indirect discharges). For industrial dischargers to POTWs, this can have the added benefit of preventing the untreated discharge of pollutants to groundwater from leaking sewer pipes or to surface waters due to combined sewer overflows. Consequently, another of EPA’s goals with the effluent guidelines program is to explore all opportunities for pollution prevention and water conservation.

### **1.3 What are Effluent Guidelines and Pretreatment Standards?**


The national clean water industrial regulatory program is authorized under sections 301, 304, 306 and 307 of the CWA and is founded on six core concepts.

1. The program is designed to address specific industrial categories. To date, EPA has promulgated effluent guidelines that address 56 categories — ranging from manufacturing industries such as petroleum refining to service industries such as centralized waste treatment.
2. National effluent guideline regulations typically specify the maximum allowable levels of pollutants that may be discharged by facilities within an industrial category or subcategory. While the limits are based on the performance of specific technologies, they do not generally require the

industry to use these technologies, but rather allow the industry to use any effective alternatives to meet the numerical pollutant limits.

3. Each facility within an industrial category or subcategory must generally comply with the applicable discharge limits — regardless of its location within the country or on a particular water body. See CWA section 307(b) and (c) and CWA section 402(a)(1). The regulations, therefore, constitute a single, standard, pollution control obligation for all facilities within an industrial category or subcategory.
4. In establishing national effluent guidelines for pollutants, EPA considers various factors, as described in Section 1.2, including: (1) the performance of the best pollution control technologies or pollution prevention practices that are available for an industrial category or subcategory as a whole; and (2) the economic achievability of the technologies, which can include consideration of costs, benefits, and affordability of achieving the reduction in pollutant discharge.
5. National regulations apply to four types of facilities within an industrial category: 1) existing facilities that discharge directly to surface waters (direct dischargers); 2) existing facilities that discharge to POTWs (indirect dischargers); and 3) newly constructed facilities (new sources) that discharge to surface waters either directly 4) or indirectly.
6. The CWA section 304(b) requires EPA to conduct an annual review of existing effluent guidelines and, if appropriate, to revise these regulations to reflect changes in the industry and/or changes in available pollution control technologies.

The CWA directs EPA to promulgate effluent limitations guidelines and standards through six levels of control: BPT, BAT, BCT, NSPS, PSES, and PSNS. For point sources that discharge pollutants directly into the waters of the United States (direct dischargers), the limitations and standards promulgated by EPA are implemented through National Pollutant Discharge Elimination System (NPDES) permits. See CWA sections 301(a), 301(b), and 402. For sources that discharge to POTWs (indirect dischargers), EPA promulgates pretreatment standards that apply directly to those sources and are enforced by POTWs and state and federal authorities. See CWA sections 307(b) and (c). Figure 1-1 illustrates the relationship between the regulation of direct and indirect dischargers.

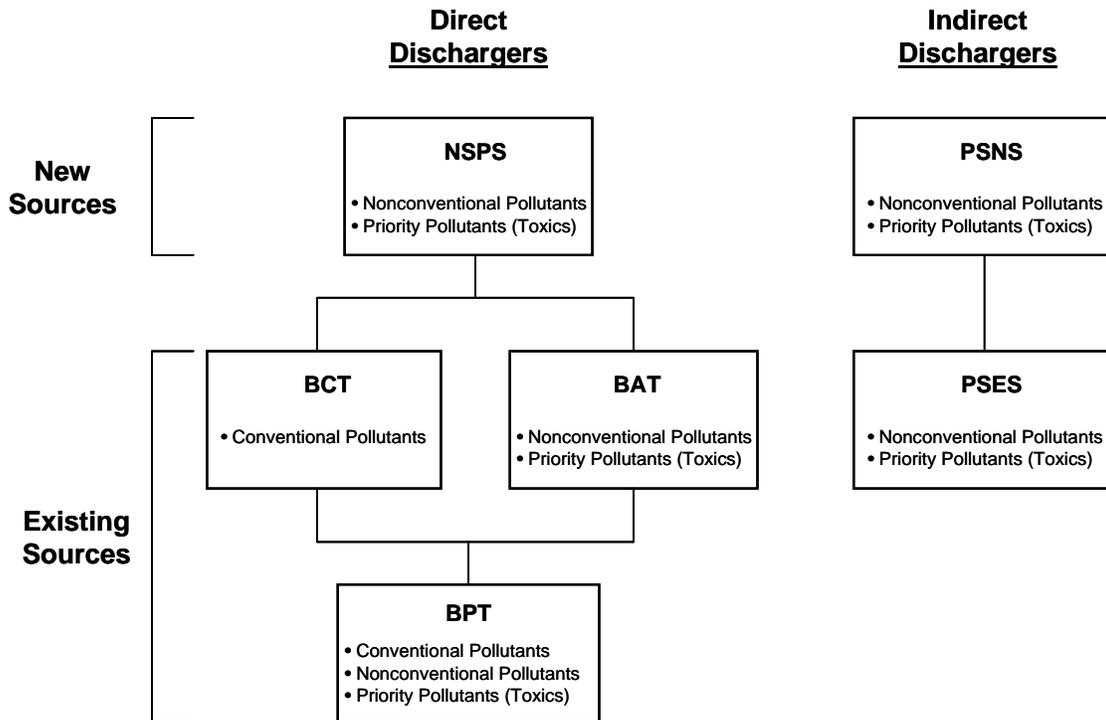

**Figure 1-1. Regulations of Direct and Indirect Wastewater Discharges Under NPDES**

### 1.3.1 Best Practicable Control Technology Currently Available (BPT) – CWA Sections 301(b)(1)(A) & 304(b)(1)

EPA develops effluent limitations based on BPT for conventional, toxic, and nonconventional pollutants. Section 304(a)(4) designates the following as conventional pollutants: biochemical oxygen demand (BOD<sub>5</sub>), total suspended solids, fecal coliform, pH, and any additional pollutants defined by the Administrator as conventional. The Administrator designated oil and grease as an additional conventional pollutant on July 30, 1979. See 44 FR 44501 (July 30, 1979). EPA has identified 65 pollutants and classes of pollutants as toxic pollutants, of which 126 specific substances have been designated priority toxic pollutants. See Appendix A to part 423, reprinted after 40 CFR Part 423.17. All other pollutants are considered to be nonconventional.

In specifying BPT, EPA looks at a number of factors. EPA first considers the total cost of applying the control technology in relation to the effluent reduction benefits. The Agency also considers the age of the equipment and facilities, the processes employed and any required process changes, engineering aspects of the control technologies, non-water-quality environmental impacts (including energy requirements), and such other factors as the EPA Administrator deems appropriate. See CWA Section 304(b)(1)(B). Traditionally, EPA establishes BPT effluent limitations based on the average of the best performances of facilities within the industry of various ages, sizes, processes or other common characteristics. Where existing performance is uniformly inadequate, BPT may reflect higher levels of control than

currently in place in an industrial category if the Agency determines that the technology can be practically applied.

**1.3.2 Best Conventional Pollutant Control Technology (BCT) – CWA Sections 301(b)(2)(E) & 304(b)(4)**

The 1977 amendments to the CWA required EPA to identify effluent reduction levels for conventional pollutants associated with BCT for discharges from existing industrial point sources. In addition to the other factors specified in Section 304(b)(4)(B), the CWA requires that EPA establish BCT limitations after consideration of a two-part “cost-reasonableness” test. EPA explained its methodology for the development of BCT limitations in 1986.; see 51 FR 24974 (July 9, 1986).

**1.3.3 Best Available Technology Economically Achievable (BAT) – CWA Sections 301(b)(2)(A) & 304(b)(2)**

For toxic pollutants and nonconventional pollutants, EPA promulgates effluent guidelines based on BAT. See CWA Section 301(b)(2)(C), (D) & (F). The factors considered in assessing BAT include the cost of achieving BAT effluent reductions, the age of equipment and facilities involved, the process employed, potential process changes, non-water-quality environmental impacts, including energy requirements, and other such factors as the EPA Administrator deems appropriate. See CWA Section 304(b)(2)(B). The technology must also be economically achievable. See CWA Section 301(b)(2)(A). The Agency retains considerable discretion in assigning the weight it accords to these factors. BAT limitations may be based on effluent reductions attainable through changes in a facility's processes and operations. Where existing performance is uniformly inadequate, BAT may reflect a higher level of performance than is currently being achieved within a particular subcategory based on technology transferred from a different subcategory or category. BAT may be based upon process changes or internal controls, even when these technologies are not common industry practice.

**1.3.4 New Source Performance Standards (NSPS) – CWA Section 306**

NSPS reflect effluent reductions that are achievable based on the best available demonstrated control technology. New sources have the opportunity to install the best and most efficient production processes and wastewater treatment technologies. As a result, NSPS should represent the most stringent controls attainable through the application of the best available demonstrated control technology for all pollutants (i.e., conventional, nonconventional, and priority pollutants). In establishing NSPS, EPA is directed to take into consideration the cost of achieving the effluent reduction and any non-water-quality environmental impacts and energy requirements.

**1.3.5 Pretreatment Standards for Existing Sources (PSES) – CWA Section 307(b)**

PSES apply to indirect dischargers, and are designed to prevent the discharge of pollutants that pass through, interfere with, or are otherwise incompatible with the operation of POTWs, including sludge disposal methods at POTWs. Pretreatment standards are technology-based and are analogous to BAT effluent limitations guidelines.

The General Pretreatment Regulations, which set forth the framework for implementing national pretreatment standards, are found at 40 CFR Part 403.

### **1.3.6 Pretreatment Standards for New Sources (PSNS) – CWA Section 307(c)**

Like PSES, PSNS apply to indirect dischargers, and are designed to prevent the discharges of pollutants that pass through, interfere with, or are otherwise incompatible with the operation of POTWs. PSNS are to be issued at the same time as NSPS. New indirect dischargers have the opportunity to incorporate into their plants the best available demonstrated technologies. The Agency considers the same factors in promulgating PSNS as it considers in promulgating NSPS.

### **1.4 Success of EPA’s Effluent Guidelines Program**

The effluent guidelines program has helped reverse the water quality degradation that accompanied industrialization in this country. Permits developed using the technology-based industrial regulations are a critical element of the Nation’s clean water program and reduce the discharge of pollutants that have serious environmental impacts, including pollutants that:

- Kill or impair fish and other aquatic organisms;
- Cause human health problems through contaminated water, fish, or shellfish; and
- Degrade aquatic ecosystems.

EPA has issued effluent guidelines for 56 industrial categories and these regulations apply to between 35,000 and 45,000 facilities that discharge directly to the Nation’s waters, as well as another 12,000 facilities that discharge to POTWs. These regulations have prevented the discharge of more than 1.2 billion pounds of toxic pollutants each year.

### **1.5 What Are EPA’s Effluent Guidelines Planning and Review Requirements?**

The CWA also requires EPA to annually review existing effluent guidelines. EPA reviews all point source categories subject to existing effluent guidelines and pretreatment standards to identify potential candidates for revision, as required by CWA sections 304(b), 301(d), 304(g) and 307(b). EPA also reviews industries consisting of direct discharging facilities not currently subject to effluent guidelines to identify potential candidates for effluent guidelines rulemakings, as required by CWA section 304(m)(1)(B). Finally, EPA reviews industries consisting entirely or almost entirely of indirect discharging facilities that are not currently subject to pretreatment standards to identify potential candidates for pretreatment standards development, as required by CWA sections 304(g) and 307(b). CWA section 304(m) requires EPA to publish an effluent guidelines program plan every two years. As part of the development of this plan, the public is provided an opportunity to comment on a “preliminary” plan before it is finalized. EPA publishes the preliminary plan on a two-year schedule followed by the final effluent guidelines program plan in the succeeding years. The preliminary plan is published in odd-numbered years and the final plan is published in even-numbered years.

**2.0 PUBLIC COMMENTS ON THE PRELIMINARY EFFLUENT GUIDELINES PROGRAM PLAN FOR 2006 AND FINAL EFFLUENT GUIDELINES PROGRAM PLAN FOR 2004**

EPA published its Preliminary 2006 Effluent Guidelines Program Plan (2006 Preliminary Plan) on August 29, 2005 (70 FR 51042-51060) and requested comments on various aspects of its analyses, data, and information to inform its 2006 annual review. In addition, EPA published its Final 2004 Effluent Guidelines Program Plan (2004 Final Plan) on September 2, 2004 (69 FR 53705-53721) and also requested comments, data and information to inform its 2005 annual review. Comments EPA received on the 2006 Preliminary Plan and on the 2004 Final Plan are located in EPA Docket Number EPA-HQ-OW-2004-0032. This section provides background information on the list of commenters and issues raised during these comment periods.

The Agency received 60 comments from a variety of commenters including industry and industry trade associations, municipalities and sewerage agencies, environmental groups, other advocacy groups, private citizens, federal agencies, and state government agencies. Stakeholders' suggestions played a significant role in both the 2005 and 2006 annual reviews. Table 2-1 lists all commenters as well as a synopsis of the comments.

**Table 2-1. Comments on the Preliminary 2006 and Final 2004 Effluent Guidelines Program Plans  
EPA Docket Number: EPA-HQ-OW-2004-0032**

| No. | Commenter Name  | EPA E-Docket No.                     | Comment Summary  |
|-----|---|--------------------------------------|--|
| 1   | Chris Sproul<br>Environmental Advocates                               | 1088                                 | Effluent Guidelines Program Plan violates CWA requirements.  |
| 2   | Melanie Shepherdson<br>Natural Resources Defense Council              | 1090                                 | General comments on effluent guidelines planning process and industry-specific information. Focus is on industries without ELGs or pretreatment standards.   |
| 3   | Albert Ettinger<br>Environmental Law and Policy Center of the Midwest | 1075<br>(duplicate at 1071 and 1066) | Questions use of TRI and PCS databases.<br>EPA needs to better assess the toxicity of coal mining wastewaters.<br>ELGs are justified for coal fired power plants and drinking water treatment facilities.<br>EPA should focus its review on nutrients.<br>EPA should set pretreatment standards on alkylphenol ethoxylates (used in industrial cleaners).  |
| 4   | Doug Mendoza<br>Metropolitan St. Louis Sewer District, MO             | 1038                                 | Provides DMR data for the rubber, inorganic chemical, industrial laundries, pesticides, and transportation equipment cleaning point source categories. Also provides names, addresses, and SIC codes of miscellaneous food and beverage facilities.  |
| 5   | L. Kinman<br>Des Moines Water Works, IA                               | 1040                                 | Supports designation of CWT for CAFOs.<br>Drinking water: water utility should not be regulated if a contaminant is removed and ultimately returned to the same source.  |
| 6   | Don Theiler<br>King County Wastewater Treatment Division, WA          | 1042                                 | Supports EPA conclusions that food service, laundries, printing and publishing, and photoprocessing don't need categorical pretreatment standards.<br>Health services: worked extensively with dentists and hospitals. Developed effective rules at local levels; significantly reduced mercury discharges from dentists; additional efforts not justified. Waste and waste disposal practices change rapidly.<br>Established a Laboratory Waste Management Guide with BMPs.<br>Categorical standards are not the correct approach. Recommends BMPs and possibly control documents.<br>Information on dentists and hospitals including BMP guidance. |

Table 2-1 (Continued)

| No. | Commenter Name   | EPA E-Docket No.            | Comment Summary   |
|-----|--|-----------------------------|---|
| 7   | Beverly B. Head<br>Metropolitan Sewer District of Greater Cincinnati, Ohio   | 1051<br>(duplicate at 1085) | <p>Provides information on cogeneration and coverage under steam electric, recommending cogeneration facilities continue to be regulated under local limits or categorical requirements for the primary processes. Water conservation: EPA should develop a policy that will not lower mass-based limits for those employing water conservation.</p> <p>By industrial category, provides a list of the number of facilities, type of treatment, and remaining pollutants.</p> <p>Provides information on how they classify various industries, including health services.</p> <p>POTW pass-through analysis: supports TWPE approach to pass through; recommends considering color and foam as pollutants.</p> <p>Provides information on elevated levels of certain chemicals in laundries, ICDC, and OCPSF.</p> <p>Says that the headspace analysis requirement reduces risk of pass through and interference.</p> <p>EPA should not issue last-minute changes as it did with CWT.</p> |
| 8   | Sherry E. Bagwell<br>City of Winston-Salem, NC                               | 1061                        | City regulates three tobacco processing facilities with no problems; continues to regulate at the local level; submitted data on flows, treatment technologies in place, and some metals monitoring data.   |
| 9   | Bernie Strohmeier<br>Hampton Roads Sanitation District, Virginia             | 1086                        | <p>No new PSES categories necessary.</p> <p>Comment on need for new POTW study as well as some suggestions about current study.</p> <p>Comments on pulp and paper and steam electric ELGs.</p> <p>Information and comments on tobacco and health services industries.</p> <p>Stakeholder involvement early in process is critical.</p> <p>No new PSES categories necessary.</p> <p>Flow-normalized mass-based permit limits: adopt flow-normalized mass-based permit limits for all indirect dischargers to encourage water conservation.</p> <p>Strategy: agrees with risk approach; focus on revising of existing ELGs, not development of new ones; good opportunity for collaboration; and agrees with 4 factors (especially that the first one is key).</p> <p>Technology: consider financial incentives or tax breaks for companies that develop innovative technologies.</p> <p>Trading: allow effluent trading for indirect dischargers.</p>                                    |
| 10  | Richard Lanyon<br>Metropolitan Water Reclamation District of Greater Chicago | 1078                        | <p>Provides information on SIUs in their region that fall within the detailed and preliminary study categories.</p> <p>No data on loads or discharges. New PSES categories are unnecessary unless permitting authorities request guidance.</p>  |

Table 2-1 (Continued)

| No. | Commenter Name   | EPA E-Docket No.                                | Comment Summary  |
|-----|--|---|--|
| 11  | Mary Boatman<br>Minerals Management Service  | 1056<br>(duplicate at 1044 & OW-2002-0020-0070) | Recommends setting effluent guidelines for “open-loop” LNG import terminals.   |
| 12  | Thomas Bigford<br>NOAA Fisheries Service   | 1094  | Recommends setting effluent guidelines for “open-loop” LNG import terminals.   |
| 13  | Gary Valasek<br>Intercontinental Chemical Corporation                                    | 0002  | Provides information on potential Chemical Formulating, Packaging, and Repackaging subcategory of OCPSF ELG.   |
| 14  | Roger E. Claff<br>American Petroleum Institute   | 0005 & 0006                                     | Recommends that EPA continue to use the 4-factor strategy to screen new and existing industrial categories for new or revised effluent guidelines. Provided suggestions for improving EPA’s strategy for selecting industries, and concurs with EPA’s decision not to select the petroleum refining effluent guidelines for revision.  |
| 15  | G. H. Holliday<br>Holliday Environmental Services  | 0007 through 0011                               | EPA should clarify the Oil and Gas Extraction Point Source Category (40 CFR 435), Offshore Subcategory BAT and NSPS requirements for the sediment toxicity test for certain synthetic base drilling fluids. Believes these requirements are not demonstrated, and the variability inherent in the test method makes it inappropriate as the basis for regulatory compliance. |
| 16  | Stephan von Tapavicza<br>Cognis Oilfield Chemicals                                       | 1041  | Provides information on an ester-based synthetic-based drilling fluid.   |
| 17  | Timothy P. Gaughan<br>Arkema Inc   | 1045 & 1046                                     | Provides information on OCPSF and mass-limits issue re: water conservation.  |
| 18  | Lindlief Hall<br>Tongue River Water Users’ Association                                   | 1048<br>(duplicate at 1050)                     | Recommends ELGs for Coal Bed Methane (CBM).  |
| 19  | Gregory E. Conrad<br>Interstate Mining Compact Commission (IMCC)                         | 1055 & 1057                                     | Recommends modifying or deleting Manganese limitations in Coal Mining ELGs (Part 434).   |
| 20  | Carl Johnson, Southern Pressure Treaters Association and Dave Webb, Creosote Council III | 1052  | Provides information on Timber Products ELGs (Part 429).   |

Table 2-1 (Continued)

| No. | Commenter Name  | EPA E-Docket No.                          | Comment Summary   |
|-----|---|---|---|
| 21  | S. Noble<br>Photo Marketing<br>Association International  | 1053<br>(duplicate<br>at 1054)            | Provides information on photoprocessing industry.   |
| 22  | Thomas W. Curtis<br>American Water Works<br>Association   | 1059 (dup<br>& OW-<br>2002-0020-<br>0072) | EPA should focus on sediments, nutrients, and microbiological contamination in its effluent guidelines – not discharges from drinking water treatment facilities. |
| 23  | Robert E. Fronczak<br>Association of American<br>Railroads  | 1060                                      | Provides information and comments on methodology including TWFs and POTW removal rates.   |
| 24  | Norbert Dee<br>National Petrochemical &<br>Refiners Association   | 1063                                      | Provides information on Petroleum Refining ELGs.<br>Comments on including cogeneration units in Steam Electric ELGs.  |
| 25  | P. Spencer Davies<br>Strathkelvin Instruments   | 1102                                      | Provides information on his monitoring technology for assessing interference with an activated sludge POTW.   |
| 26  | Roger E. Claff<br>American Petroleum<br>Institute   | 1067                                      | Provides information on Petroleum Refining ELGs.<br>Comments on including cogeneration units in Steam Electric ELGs.<br>TWF methodology comments.                 |
| 27  | Betty Anthony (API) &<br>Kim Harb (NOIA)<br>American Petroleum<br>Institute and National<br>Ocean Industries<br>Association | 1089                                      | Provides information on synthetic-based drilling fluids and related analytic methods in Part 435.   |
| 28  | Amy E. Schaffer<br>Weyerhaeuser Company   | 1070<br>1099<br>(revisions<br>to 1070)    | Provides information on Phase I and Phase II Pulp and Paper facilities.   |
| 29  | Elizabeth Aldridge<br>Utility Water Act Group   | 1083                                      | Provides information on Steam Electric ELGs and methodology comments.   |
| 30  | John Candler<br>M-I SWACO   | 1084                                      | Provides information on synthetic-based drilling fluids and related analytic methods in Part 435.   |

Table 2-1 (Continued)

| No. | Commenter Name  | EPA E-Docket No.                                 | Comment Summary   |
|-----|---|--|---|
| 31  | Tracey Norberg<br>Rubber Manufacturers Association                      | 1097   | Provides information on Rubber Manufacturing ELGs (Part 428).   |
| 32  | Paul Weigand<br>National Council for Air and Stream Improvement, Inc.   | 1079<br>(duplicate at 1069)<br>1104<br>(updates) | Provides information and comments on Pulp and Paper ELGs.   |
| 33  | Jerry Schwartz<br>American Forest & Paper Association                   | 1074   | Provides information and comments on Pulp and Paper ELGs.   |
| 34  | Robert Elam<br>American Chemistry Council                               | 0073<br>(duplicate at 1068)                      | Comments on possible inclusion of cogeneration units under steam electric ELGs.<br>Comments on review methodology.<br>Facility-specific OCPSF comments.<br>Comments on mass-based versus concentration-based limits.<br>Provides information on the OCPSF ELGs.   |
| 35  | Steve C. Curl<br>R. J. Reynolds Tobacco Company                         | 1096   | Provides information on their tobacco facilities and environmental studies.   |
| 36  | Susan Bruninga<br>National Association of Clean Water Agencies          | 1093   | No new PSES categories necessary.<br>Comment on need for new POTW study as well as some suggestions about current study.<br>Comments on Pulp and Paper and Steam Electric ELGs.<br>Provides information and comments on tobacco and health services industries.<br>Flow-normalized mass-based permit limits: adopt flow-normalized mass-based permit limits for all indirect dischargers to encourage water conservation.<br>Strategy: agrees with risk approach; focus on revisions of existing ELGs, not development of new ones; good opportunity for collaboration; agrees with 4 factors (especially that the first one is key).<br>Technology: consider financial incentives or tax breaks for companies that develop innovative technologies.<br>Trading: allow effluent trading for indirect dischargers. |
| 37  | Jeff Gunnulfsen<br>Synthetic Organic Chemical Manufacturers Association | 1098   | Provides information on OCPSF and mass- vs. concentration-based limits issue.   |

Table 2-1 (Continued)

| No. | Commenter Name  | EPA E-Docket No.               | Comment Summary  |
|-----|---|--------------------------------|--|
| 38  | Thomas White<br>Pharmaceutical Research<br>and Manufacturers of<br>America          | 1095                           | Comments on possible inclusion of cogeneration units under Steam Electric ELGs.<br>Comments on mass- vs. concentration-based limits issue.   |
| 39  | Terrance Rucker<br>American Public Power<br>Association                             | 1065                           | Provides information on Steam Electric ELGs and Detailed Study.  |
| 40  | Paul Chu<br>Electric Power Research<br>Institute                                    | 1073                           | Provides information on Steam Electric ELGs and Detailed Study.  |
| 41  | John Ochs<br>Penn View Mining, Inc.<br>T.J.S. Mining, Inc.<br>Thomas J. Smith, Inc. | 1091                           | Recommends modifying or deleting manganese limitations in Coal Mining ELGs (Part 434).   |
| 42  | Stanley R. Geary<br>Pennsylvania Coal<br>Association                                | 1062<br>(duplicate<br>at 1100) | Recommends modifying or deleting manganese limitations in Coal Mining ELGs (Part 434).   |
| 43  | David D. Dunlap<br>Uniform & Textile Service<br>Association                         | 1064                           | Supports EPA's two-part evaluation for determining pass-through potential.<br>TWFs have not been properly vetted and development needs to be more transparent.<br>EPA should focus its efforts on assisting small POTWs rather than categorical standards.<br>Information on laundries industry. |
| 44  | Jeffrey S. Lynn<br>International Paper  | 1087                           | Provides information on Pulp and Paper ELGs and Detailed Study.  |
| 45  | Kairas Parvez, Sr.<br>MeadWestvaco  | 1077<br>(duplicate<br>at 1092) | Provides information on Pulp and Paper ELGs and Detailed Study.  |
| 46  | Porcelain Enamel Institute  | 1072                           | Provides information on Porcelain Enameling ELGs (Part 466).   |
| 47  | John M. Ross<br>NiSource Inc  | 1076                           | Comments on the possible inclusion of cogeneration units under Steam Electric ELGs.  |
| 48  | Mayes Starke<br>Georgia-Pacific   | 1082                           | Provides information on Pulp and Paper ELGs and Detailed Study.  |

Table 2-1 (Continued)

| No. | Commenter Name   | EPA E-Docket No.  | Comment Summary  |
|-----|--|---|--|
| 49  | Kenneth S. Johnson<br>Constellation Generation Group   | 1080  | Provides information on the Steam Electric ELGs and Detailed Study.  |
| 50  | Christine M. Andrews<br>National Restaurant Association  | 1081  | EPA should not establish pretreatment standards for food service establishments.   |
| 51  | Richard Marchi<br>Airports Council International – North America (ACI-NA)<br>American Association of Airport Executives (AAAEE)<br>Airport Clean Water Alliance (ACWA) | OW-2002-0020-0074<br>{Note that this is in the ‘Strategy’ Docket} | Seeks assurance that promulgation of an airport deicing regulation will not occur without full consideration of the complex issues affecting airport deicing issues.   |
| 52  | Robert J. King<br>Lorillard Tobacco Company  | 1105  | Provides information on the tobacco industry and study.  |
| 52  | Hugh Wise  | 1047  | EPA should recodify ELGs to put them in plain English.   |
| 53  | George M. Jett   |   | Develop TWFs for oil and grease compounds and nutrients.<br>Revise the POTW Study.<br>Implement OMB review of EPA policy making.<br>Evaluate new industrial categories.<br>Publish ELG Guidance Documents.<br>Fix older regulations and implement all regulations. |
| 54  | Karl Mueldener<br>Kansas Department of Health and Environment  | 0003  | Commenter provided information on Kansas’ program to control discharges from drinking water treatment facilities.  |
| 55  | William Creal<br>Michigan Department of Environmental Quality  | 0004  | Strongly supports EPA continuing to revise and update technology-based effluent limitations, which they believe is one of EPA’s primary responsibilities and a cornerstone of the CWA.   |

Table 2-1 (Continued)

| No. | Commenter Name  | EPA E-Docket No. | Comment Summary   |
|-----|---|------------------|---|
| 56  | <p>Allen Gilliam<br/>Arkansas Department of Environmental Quality</p> <p>Dave Knight<br/>Washington State Department of Ecology</p> | 0678             | <p>Recommends EPA revise the effluent guidelines for the Transportation Equipment Cleaning Point Source Category (40 CFR 442) due to difficulties in assessing compliance with the current requirements. The control authority has insufficient knowledge of the practices.</p> <p>Recommends EPA evaluate pretreatment standards with more focus on small to medium sized POTWs, who may not be aware of the opportunity to provide comment on rulemaking activities. Industrial wastewater treatment effectiveness of smaller POTWs may differ from larger POTWs.</p> <p>Revisit pretreatment standards for Meat and Poultry Products (40 CFR 432), Industrial Laundries (never promulgated), and Metal Molding and Casting (40 CFR 464) Point Source Categories. Also recommends EPA study hospitals and dental facilities, with particular focus on emerging pollutants of concern, and laboratory and pharmaceutical exotics.</p> <p>Recommends sunseting existing source standards for new source standards for all industries by a future date, and removing phenol limits from all pretreatment standards, particularly the Metal Molding and Casting Point Source Category (40 CFR 464).</p> |
| 57  | Steve Caspers<br>State of Kansas  | 0680             | <p>Recommends EPA review interference issues associated with UV disinfection equipment at POTWs. Notes that this issue could also become more prevalent as more cities convert from chlorine to UV for disinfection.</p>  |
| 58  | Dave Knight<br>Washington State Department of Ecology   | 1036             | <p>Comments on TWFs and the TWF Methodology.</p> <p>Need guidance/tools for emerging contaminants.</p> <p>Comments on screening-level analysis and TRI/PCS databases.</p> <p>Need to solicit more information from POTWs on interference.</p> <p>Supports development of ELGs for dentists.</p> <p>Review new and existing source definitions.</p> <p>Remove phenol limits from all PSES for all point source categories.</p>   |
| 59  | Benny R. Wampler<br>VA Department of Mines, Minerals, and Energy  | 1049             | <p>Recommends modifying or deleting manganese limitations in Coal Mining ELGs (Part 434).</p>   |
| 60  | Kathleen A. McGinty<br>PA Department of Environmental Protection  | 1101             | <p>Recommends modifying or deleting manganese limitations in Coal Mining ELGs (Part 434).</p>   |

### **3.0 THE EFFLUENT GUIDELINES PLANNING PROCESS**

This section provides a general overview of the process EPA used to identify industrial categories for potential development of new or revised effluent limitations guidelines and pretreatment standards (ELGs) in 2005 and 2006. This process consists of: (1) annual review of existing ELGs to identify candidates for revision; (2) identification of new categories of direct dischargers for possible development of effluent guidelines; and (3) identification of new categories of indirect dischargers for possible development of pretreatment standards. Each of these components is illustrated in Figure 3-1 and discussed below.

#### **3.1 Goals of the ELG Planning Process**

In the effluent guideline planning process, EPA was guided by the following goals:

- Restore and maintain the chemical, physical, and biological integrity of the Nation's waters; and
- Provide transparent decision-making and involve stakeholders early and often during the planning process.

#### **3.2 Annual Review of Existing Effluent Guidelines and Pretreatment Standards**


This section describes the four factors used (Section 3.2.1) and how they are used (Section 3.2.2) in the annual review of existing effluent guidelines and pretreatment standards.

##### **3.2.1 Factors Considered in Review of Existing Effluent Guidelines and Pretreatment Standards**

EPA uses four major factors in prioritizing existing effluent guidelines or pretreatment standards for possible revision.


The first factor EPA considers is the amount and type of pollutants in an industrial category's discharge, and the relative hazard posed by that discharge. This enables the Agency to set priorities for rulemaking to achieve the greatest environmental and health benefits. EPA estimates the toxicity of pollutant discharges in terms of toxic-weighted pound equivalents (TWPE), discussed in detail in Section 4.1.3. To assess the effectiveness of pollution control, EPA examines the removal of pollutants, in terms of pounds and TWPE.

The second factor EPA considers is the performance and cost of applicable and demonstrated wastewater treatment technologies, process changes, or pollution prevention alternatives that could effectively reduce the pollutants in the industrial category's wastewater and, consequently, reduce the hazard to human health or the environment associated with these pollutant discharges.

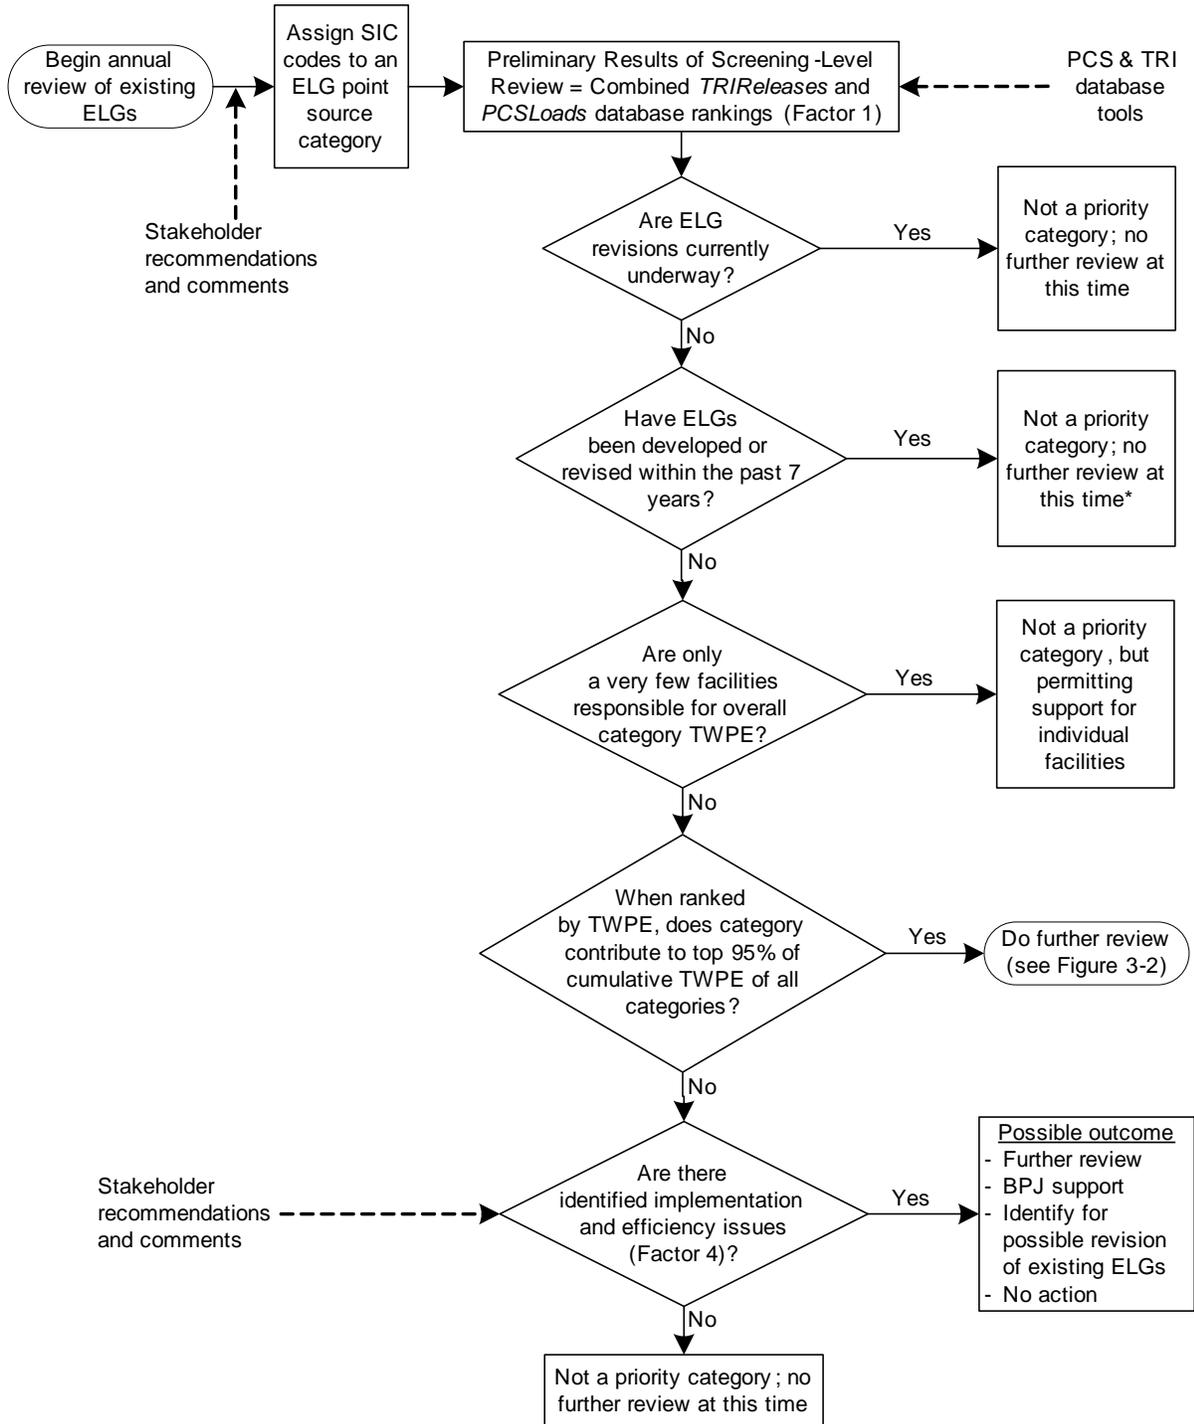


\*If EPA is aware of new segment growth within such a category or new concerns are identified, EPA may do further review.

Figure 3-1. Flow Chart of Annual Review of Existing ELGs

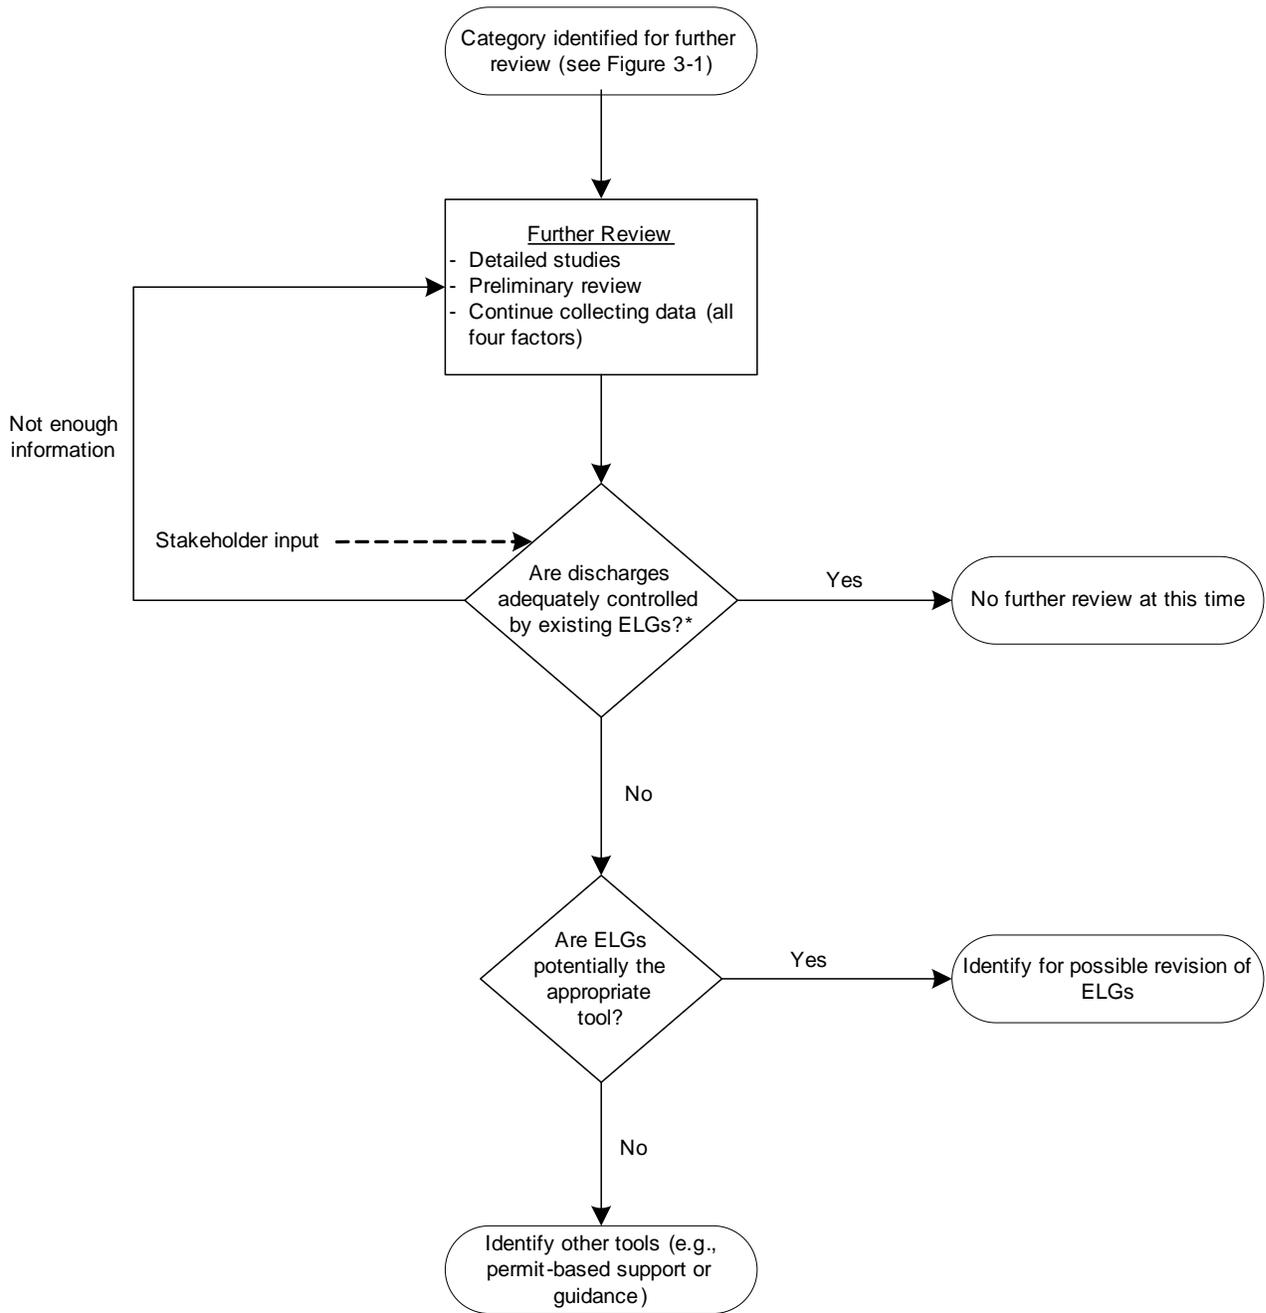

\*Continue further review if not enough data .

Figure 3-2. Flow Chart of Further Review of Existing ELGs

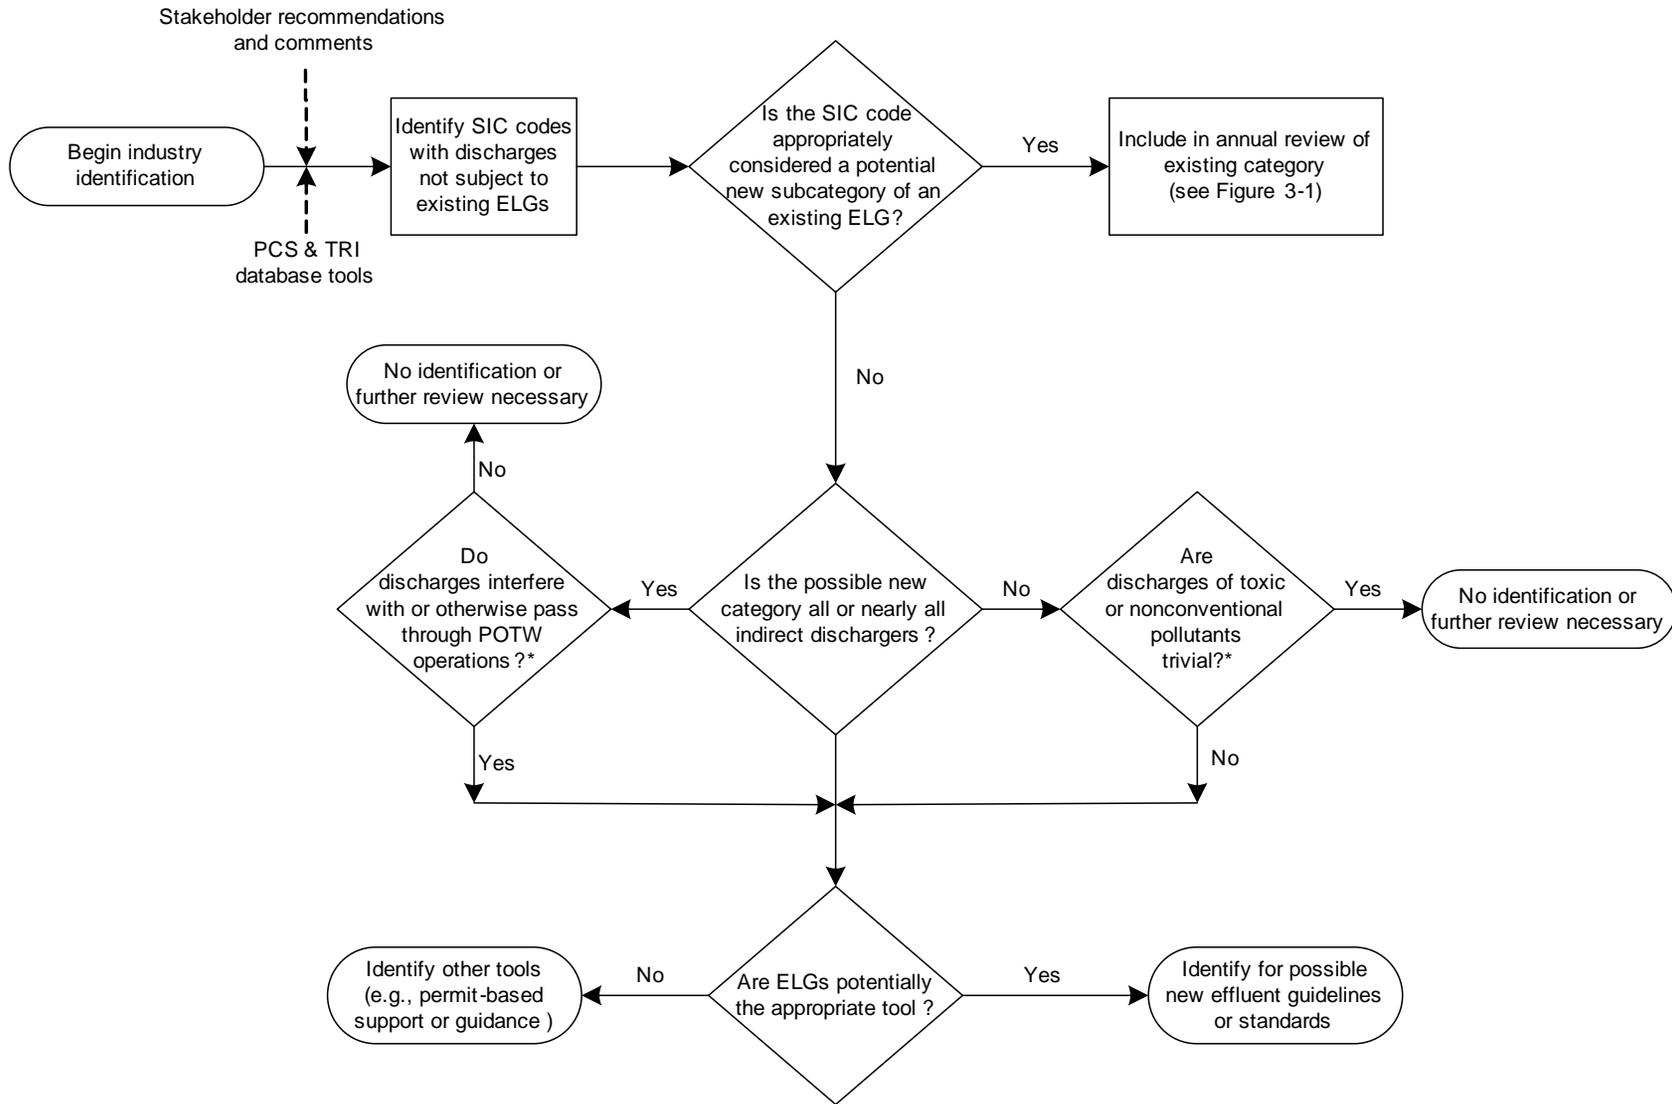

\*Continue further review if not enough data .

Figure 3-3. Flow Chart of Identification of Possible New ELGs

The third factor EPA considers is the affordability or economic achievability of the wastewater treatment technology, process change, or pollution prevention measures identified using the second factor. If the financial condition of the industry indicates that it would be difficult to implement new requirements, EPA might conclude that it would be more cost-effective to develop less expensive approaches to reducing pollutant loadings that would better satisfy applicable statutory requirements.

The fourth factor EPA considers is an opportunity to eliminate inefficiencies or impediments to pollution prevention or technological innovation, or opportunities to promote innovative approaches such as water quality trading, including within-plant trading. This factor might also prompt EPA, during an annual review, to decide against identifying an existing set of effluent guidelines or pretreatment standards for revision where the pollutant source is already efficiently and effectively controlled by other regulatory or nonregulatory programs.

### **3.2.2 Overview: Review of Existing Point Source Categories**

EPA has established ELGs to regulate wastewater discharges from 56 point source categories and 450 subcategories. EPA must annually review the ELGs for all of these categories and subcategories. EPA first does a screening-level review of all categories subject to existing ELGs. EPA then conducts further review of categories prioritized as a result of the screening level review. This further review consists of either an in-depth “detailed study” or a somewhat less detailed “preliminary category review.” Based on this further review, EPA identifies existing categories for potential ELGs revision.

#### **3.2.2.1 Screening-Level Review**

The screening-level review is the first step in EPA’s annual review. Section 4.0 provides details on the database methodology used in the screening-level review. EPA uses this step to prioritize categories for further review. In conducting the screening-level review, EPA considers the amount and toxicity of the pollutants in a category's discharge and the extent to which these pollutants pose a hazard to human health or the environment (Factor 1).

EPA conducts its screening-level review with data from TRI and PCS. TRI and PCS do not list the effluent guideline(s) applicable to a particular facility. However, they both include information on a facility’s Standard Industrial Classification (SIC) code. Therefore, the first step in EPA’s screening-level review is to assign each SIC code to an industrial category<sup>1</sup>. EPA then uses the information reported in TRI and PCS, for a specified year, in combination with toxic weighting factors (TWFs)<sup>2</sup> to calculate the total discharge of toxic and nonconventional pollutants (reported in units of toxic-weighted pound equivalent or TWPE) for each facility in a category for that year. For indirect dischargers, EPA adjusts this facility-specific value to account for removals at the POTW. EPA then sums the TWPE for each facility in a category to calculate a total TWPE per category for that year. EPA calculates two TWPE estimates for each category: one based on data in TRI and one based on data in PCS. In its 2005

---

<sup>1</sup> For more information on EPA’s assignment of each SIC code to an industrial category, see Section 5.0 of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005).

<sup>2</sup> For more information on Toxic Weighting Factors, see *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006).

---

and 2006 reviews, EPA combined the estimated discharges of toxic and nonconventional pollutants calculated from the TRI and PCS databases to estimate a single TWPE value for each industrial category. EPA took this approach because it found that combining the TWPE estimates from the TRI and PCS databases into a single TWPE number offered a clearer perspective of the industries with the most toxic pollution<sup>3</sup>.

EPA then ranks point source categories according to their total TWPE discharges. In identifying categories for further review, EPA prioritizes categories accounting for 95 percent of the cumulative TWPE from the combined databases. (See Section 5.3). EPA also excludes from further review categories for which effluent guidelines had been recently promulgated or revised (within the past seven years), or for which an effluent guidelines rulemaking is currently underway. EPA chose seven years because this is the time it customarily takes for the effects of effluent guidelines or pretreatment standards to be fully reflected in pollutant loading data and TRI reports. EPA also considers the number of facilities responsible for the majority of the estimated toxic-weighted pollutant discharges associated with an industrial activity. Where only a few facilities in a category account for the vast majority of toxic-weighted pollutant discharges, EPA does not prioritize the category for additional review. In this case, EPA believes that revising individual permits may be more effective in addressing the toxic-weighted pollutant discharges than a national effluent guidelines rulemaking because requirements can be better tailored to these few facilities, and because individual permitting actions may take considerably less time than a national rulemaking.

### **3.2.2.2 Further Review**

Following its screening-level review of all point source categories, EPA prioritizes certain categories for further review. The purpose of the further review is to determine whether it would be appropriate for EPA to identify in the final plan a point source category for potential effluent guidelines revision. EPA typically conducts two types of further review: detailed studies and preliminary reviews. EPA selects categories for further review based on the screening-level review and/or stakeholder input.

EPA's detailed studies generally examine the following: (1) wastewater characteristics and pollutant sources; (2) the pollutants driving the toxic-weighted pollutant discharges; (3) availability of pollution prevention and treatment; (4) the geographic distribution of facilities in the industry; (5) any pollutant discharge trends within the industry; and (6) any relevant economic factors. First, EPA attempts to verify the screening-level results and to fill in data gaps (Factor 1). Next, EPA considers costs and performance of applicable and demonstrated technologies, process changes, or pollution prevention alternatives that can effectively reduce the pollutants remaining in the point source category's wastewater (Factor 2). Lastly, EPA considers the affordability or economic achievability of the technology, process change, or pollution prevention measures identified using the second factor (Factor 3).

---

<sup>3</sup>Different pollutants may dominate the TRI and PCS TWPE estimates for an industrial category due to the differences in pollutant reporting requirements between the TRI and PCS databases. The single TWPE number for each category highlights those industries with the most toxic discharge data in both TRI and PCS. Although this approach could have theoretically led to double-counting, EPA's review of the data indicates that because the two databases focus on different pollutants, double-counting was minimal and did not affect the ranking of the top ranked industrial categories.

---

Types of data sources that EPA may consult in conducting its detailed studies include, but are not limited to: (1) U.S. Economic Census; (2) TRI and PCS data; (3) trade associations and reporting facilities to verify reported releases and facility categorization; (4) regulatory authorities (states and EPA regions) to understand how category facilities are permitted; (5) NPDES permits and their supporting fact sheets; (6) EPA effluent guidelines technical development documents; (7) relevant EPA preliminary data summaries or study reports; and (8) technical literature on pollutant sources and control technologies.

Preliminary reviews are similar to detailed studies and have the same purpose. During preliminary reviews, EPA generally examines the same factors and data sources listed above for detailed studies. However, in a preliminary review, EPA’s examination of a point source category and available pollution prevention and treatment options is less rigorous than in its detailed studies. While EPA collects and analyzes hazard and technology performance and cost information on categories undergoing preliminary review, it assigns a higher priority to investigating categories undergoing detailed studies.

### **3.3 Identification of New Categories of Direct Dischargers for Possible Effluent Guidelines Development**

Concurrent with its review of existing point source categories, EPA also reviews industries not currently subject to effluent guidelines to identify potential new point source categories. To identify possible new categories, EPA conducts a “crosswalk” analysis based on data in PCS and TRI. Facilities with data in PCS and TRI are identified by a four-digit SIC code (Section 4.1.1 provides more details on SIC codes). As with existing sources, EPA links each four-digit SIC code to an appropriate industrial category (i.e., “the crosswalk”)<sup>4</sup>. This crosswalk identifies SIC codes that EPA associated with industries subject to an existing guideline. The crosswalk also identifies SIC codes not associated with an existing guideline. In addition to the crosswalk analysis, EPA relies on stakeholder comments and data in identifying potential new point sources categories. TRI and PCS have only limited data on discharges on potential new categories or subcategories. Section 4.1 discusses the utility and limitations of TRI and PCS in detail.

For each industry identified through the crosswalk analysis or stakeholder comments, EPA evaluates whether it constitutes a potential new *category* subject to identification in the plan or whether it is properly considered a potential new *subcategory* of an existing point source category. To make this determination, EPA generally looks at whether the industry produces a similar product or performs a similar service as an existing category. If so, EPA generally considers the industry to be a potential new subcategory of that category. If, however, the industry is significantly different from existing categories in terms of products or services provided, EPA considers the industry as a potential new stand-alone category subject to identification in the plan.

Because the CWA specifies different requirements for potential new categories of direct and indirect dischargers, EPA examines potential new categories to determine if the

---

<sup>4</sup> For additional information on “the crosswalk,” see Section 5.0 of the 2005 Screening-Level Analysis Report (U.S. EPA, 2005).

category comprises mostly indirect dischargers or if it comprises both direct and indirect dischargers. If a category consists largely of indirect dischargers, EPA evaluates the pass-through and interference potential of the category (see Section 3.4). If a category includes direct dischargers, EPA evaluates the type of pollutants discharged by the category.

EPA does not identify in the plan industries for which conventional pollutants, rather than toxic or nonconventional pollutants, are the pollutants of concern. Also, even where toxic and non-conventional pollutants are present in the discharge, EPA does not identify the industry in the plan if such pollutants are present only in trivial amounts and thereby present an insignificant hazard to human health and the environment.

Further, EPA would likely not identify an industrial sector as a candidate point source category for an effluent guidelines rulemaking when: (1) the industrial category is currently the subject of an effluent guidelines rulemaking effort (e.g., Airport Deicing Operations, Drinking Water Treatment Facilities); or (2) direct discharges from point sources within the industrial sector are not subject to the CWA permitting requirements (e.g., direct discharges from silviculture operations).

Finally, EPA does not necessarily identify in the plan all potential new categories subject to identification. Rather, EPA may exercise its discretion to identify only those potential new categories for which it believes an ELG would be an appropriate tool – and rely on other CWA tools (e.g., water-quality based effluent limitations or assistance to permit writers in establishing site-specific technology-based effluent limitations) when such other mechanisms would be more effective and efficient.

### **3.4 Identification of New Categories of Indirect Dischargers for Possible Effluent Guidelines Development**

For potential new categories with primarily indirect discharges, EPA evaluates the potential for the wastewater to “interfere with, pass through, or [be] otherwise incompatible with” the operation of POTWs. See 33 U.S.C. § 1371(b)(1). Using available data, EPA reviews the types of pollutants in an industry’s wastewater. Then, EPA reviews the likelihood of those pollutants to pass through a POTW. For most categories, EPA evaluated the “pass through potential” as measured by: (1) the total annual TWPE discharged by the industrial sector; and (2) the average TWPE discharge among facilities that discharge to POTWs. EPA also assesses the interference potential of the discharge. Finally, EPA considers whether the pollutant discharges are already adequately controlled by general pretreatment standards and/or local pretreatment limits. Section 19 of this TSD describes EPA’s review of industries with primarily indirect discharges to determine whether to establish categorical pretreatment standards under CWA sections 304(g) and 307(b).

### **3.5 Stakeholder Involvement and Schedule**

EPA’s goal is to involve stakeholders early and often during its annual reviews of existing effluent guidelines and the development of the biennial plans. This will likely maximize collection of data to inform EPA’s analyses and provide additional transparency and understanding of EPA’s effluent guidelines priorities identified in the biennial plans.

EPA's annual reviews build on reviews from previous years, and reflect a lengthy outreach effort to involve stakeholders in the review process. In performing its annual reviews, EPA considers all public comments, information, and data submitted to EPA as part of its outreach activities. EPA solicits public comment at the beginning of each annual review of effluent guidelines and on the preliminary biennial plan. In each Federal Register Notice, EPA requests stakeholder comments on specific industries and discharges as well as any general comments.

EPA completes an annual review of industrial discharges each year, upon publication of the Preliminary and Final Effluent Guidelines Program Plans. In odd-numbered years, EPA publishes its preliminary plan that EPA must publish for public review and comment under CWA section 304(m)(2). In even-numbered years, EPA publishes its final plan that incorporates the comments received on the preliminary plan.

EPA intends that these coincident reviews will provide meaningful insight into EPA's effluent guidelines and pretreatment standards program decision-making. Additionally, EPA is using an annual publication schedule to most efficiently serve the public as these annual notices will serve as the 'one-stop shop' source of information on the Agency's current and future effluent guidelines and pretreatment standards program.

### **3.6            References**

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2006. *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process*. Washington, DC. (June). DCN 03196.

## 4.0 METHODOLOGY, DATA SOURCES, AND LIMITATIONS

As discussed in Section 1.0, the CWA requires EPA to conduct an annual review of existing effluent limitations guidelines and standards (ELGs). It also requires EPA to identify which unregulated industrial categories are candidates for further review. EPA's methodology for this annual review and unregulated category identification involves several components.

First, EPA performs a screening-level review of all point source categories subject to existing ELGs to identify categories discharging high levels of toxic and nonconventional pollutants relative to other categories. Using the results of the screening-level review, EPA continues its annual review of priority categories to identify candidate ELGs for revision, as required by CWA sections 304(b), 301(d), 304(g) and 307(b). The findings of EPA's 2006 annual review are discussed in Part II (Sections 5.0 to 18.0). Second, EPA reviews indirect discharging industries not currently subject to pretreatment standards to identify potential candidates for pretreatment standards development, as required by CWA section 307(b). The findings of this review are discussed in Part III (Section 19.0) of this report. Finally, EPA reviews direct discharging industries not currently subject to ELGs to identify potential candidates for ELG development, as required by section 304(m)(1)(B) of the CWA. The findings of this review are discussed in Part III (Section 20.0) of this report.

In performing the screening-level reviews of existing ELGs and identifying unregulated industrial categories, EPA relies on data from the Permit Compliance System (PCS) and Toxic Release Inventory (TRI). This section discusses these databases, related data sources, and their limitations.

EPA has developed two screening-level tools, the *TRIReleases* and *PCSLoads* databases, to facilitate analysis of TRI and PCS. EPA explains the creation of these screening-level analysis tools in the report entitled, *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of Potential New Categories for Effluent Limitations Guidelines and Standards*, dated August 2005 (U.S. EPA, 2005b). The 2005 SLA report provides the detailed methodology used to process thousands of data records and generate national estimates of industrial effluent discharges. This section does not revisit the details of creating the database tools. Instead, it lists the methodology corrections made to the PCS and TRI databases after EPA's 2005 annual review. It also presents the preliminary category rankings from *TRIReleases2002\_v4*, *TRIReleases2003\_v2*, and *PCSLoads2002\_v4*.

### 4.1 Data Sources and Limitations

This subsection provides general information on the use of SIC codes, TWFs, TRI data, and PCS data. The following reports supplement this section and discuss EPA's methodology for developing and using these tools:

- The 2005 SLA Report (U.S. EPA, 2005b): Documents the methodology and development of the *PCSLoads2002* and *TRIReleases2002* databases, including (but not limited to) matching SIC codes to point source categories and using TWFs to estimate TWPE;

- The *Draft Toxic Weighting Factor Development in Support of the CWA 304(m) Planning Process (Draft TWF Development Document)*, dated July 2005 (U.S. EPA, 2005a): Explains how EPA developed its TWFs; and
- The *Toxic Weighting Factor Development in Support of the CWA 304(m) Planning Process (Final TWF Development Document)* (U.S. EPA, 2006a): Explains how EPA developed the April 2006 TWFs.

#### 4.1.1 SIC Codes

The SIC system was developed to help with the collection, aggregation, presentation, and analysis of data from the U.S. economy (OMB, 1987). The SIC code is formatted in the following way:

- The first two digits represent the major industry group;
- The third digit represents the industry group; and
- The fourth digit represents the industry.

For example, major SIC code 10: Metal Mining, includes all metal mining operations. Within SIC code 10, four-digit SIC codes are used to separate mines by metal type: 1011 for iron ore mining, 1021 for copper ore mining, etc.

The SIC system is used by many government agencies, including EPA, to promote data comparability. In the SIC system, each establishment is classified according to its primary economic activity, which is determined by its principal product or group of products. An establishment may have activities in more than one SIC code. Some data collection organizations (e.g., the economic census) track only the primary SIC code for each establishment. TRI allows reporting facilities to identify their primary SIC code and up to five additional SIC codes. PCS includes one 4-digit SIC code, reflecting the principal activity causing the discharge at each facility. For a given facility, the SIC code in PCS may differ from the primary SIC code identified in TRI.

Regulations for an individual point source category may apply to one SIC code, multiple SIC codes, or a portion of the facilities in an SIC code. Therefore, to use databases that identify facilities by SIC code, EPA linked each 4-digit SIC code to an appropriate point source category, as summarized in the “SIC/Point Source Category Crosswalk” table (Appendix A).

There are some SIC codes for which EPA has not established national ELGs. Some of these SIC codes were reviewed because they were identified through stakeholder comments or other factors. These are discussed in Part III of this document. Appendix B lists the SIC codes for which facility discharge data are available in TRI and/or PCS, but for which EPA could not identify an applicable point source category. For a more detailed discussion, see Section 5.5 of the *2005 Annual Screening-Level Analysis* report (U.S. EPA, 2005b).

#### 4.1.2 Toxic Weighting Factors

In developing ELGs, EPA developed a variety of tools and methodologies to evaluate effluent discharges. Within EPA's Office of Water, the Engineering and Analysis Division (EAD) maintains a Toxics Database, compiled from over 100 references, containing aquatic life and human health toxicity data, as well as physical/chemical property data, for more than 1,900 pollutants. The pollutants in this database are identified by a unique Chemical Abstracts Service (CAS) number. EPA calculates TWFs from these data to account for differences in toxicity across pollutants and to provide the means to compare mass loadings of different pollutants on the basis of their toxic potential. In its analyses, EPA multiplies a mass loading of a pollutant in pounds per year (lb/yr) by a pollutant-specific weighting factor to derive a "toxic-equivalent" loading (lb-equivalent/yr). The development of TWFs is discussed in detail in the Draft and Final TWF Development Documents (U.S. EPA, 2005a; U.S. EPA, 2006a).

EPA derives TWFs from chronic aquatic life criteria (or toxic effect levels) and human health criteria (or toxic effect levels) established for the consumption of fish. For carcinogenic substances, EPA sets the human health risk level at  $10^{-5}$  (i.e., protective to a level allowing 1 in 100,000 excess lifetime cancer cases over background). In the TWF method for assessing water-based effects, these toxicity levels are compared to benchmark values. EPA selected copper, a toxic metal commonly detected and removed from industry effluent, as the benchmark pollutant. The Final TWF Development Document contains details on how EPA developed its TWFs. Appendix C lists the TWFs for those chemicals in the *TRIRelases* and *PCSLoads* databases for which EPA has developed TWFs.

#### 4.1.3 Calculation of TWPE

EPA weighted the annual pollutant discharges calculated from the TRI (see Section 4.1.4) and PCS (see Section 4.1.5) databases using EAD's TWFs to calculate TWPE for each reported discharge. EPA summed the estimated TWPE discharged by each facility in a point source category to understand the potential hazard of the discharges from each category. The following subsections discuss the calculation of TWPE.

#### 4.1.4 Data from TRI

TRI is the common name for Section 313 of the Emergency Planning and Community Right-to-Know Act (EPCRA). Each year, facilities that meet certain thresholds must report their releases and other waste management activities for listed toxic chemicals. Facilities must report the quantities of toxic chemicals recycled, collected and combusted for energy recovery, treated for destruction, or disposed of. A separate report must be filed for each chemical that exceeds the reporting threshold. The TRI list of chemicals for reporting years 2002 and 2003 includes more than 600 chemicals and chemical categories. For the 2005 and 2006 screening-level reviews, EPA used data for reporting years 2002 and 2003, because they were the most recent available at the time the review began.

A facility must meet the following three criteria to be required to submit a TRI report for a given reporting year:

- (1) *SIC Code Determination:* Facilities in SIC codes 20 through 39, 16 additional SIC codes outside this range<sup>5</sup>, and federal facilities are subject to TRI reporting. EPA generally relies on facility claims regarding the SIC code identification. The primary SIC code determines TRI reporting.
- (2) *Number of Employees:* Facilities must have 10 or more full-time employees or their equivalent. EPA defines a “full-time equivalent” as a person that works 2,000 hours in the reporting year (there are several exceptions and special circumstances that are well-defined in the TRI reporting instructions).
- (3) *Activity Thresholds:* If the facility is in a covered SIC code and has 10 or more full-time employee equivalents, it must conduct an activity threshold analysis for every chemical and chemical category on the current TRI list. The facility must determine whether it manufactures, processes, OR otherwise uses each chemical at or above the appropriate activity threshold. Reporting thresholds are not based on the amount of release. All TRI thresholds are based on mass, not concentration. Different thresholds apply for persistent bioaccumulative toxic (PBT) chemicals than for non-PBT chemicals. Generally, threshold quantities are 25,000 pounds for manufacturing and processing activities, and 10,000 pounds for otherwise use activities. All thresholds are determined per chemical over the calendar year. For example, dioxin and dioxin-like compounds are considered PBT chemicals. The TRI reporting guidance requires any facility that manufactures, processes, or otherwise uses 0.1 grams of dioxin and dioxin-like compounds to report it to TRI (U.S. EPA, 2000).

In TRI, facilities report annual loads released to the environment of each toxic chemical or chemical category that meets reporting requirements. They must report on-site releases to air, receiving streams, disposal to land, underground wells, and several other categories. They must also report the amount of toxic chemicals in wastes transferred to off-site locations, (e.g., POTWs, commercial waste disposal facilities).

For its screening-level reviews, EPA focused on the amount of chemicals facilities reported either discharging directly to a receiving stream or transferring to a POTW. For facilities discharging directly to a stream, EPA took the annual loads directly from the reported TRI data for calendar years 2002 and 2003. For facilities transferring to POTWs, EPA first adjusted the TRI pollutant loads reported to be transferred to POTWs to account for pollutant removal that occurs at the POTWs prior to discharge to the receiving stream. Appendix D lists the POTW removals used for all TRI chemicals reported as transferred to POTWs.

Facilities reporting to TRI are not required to sample and analyze waste streams to determine the quantities of toxic chemicals released. They may estimate releases based on mass balance calculations, published emission factors, site-specific emission factors, or other

---

<sup>5</sup> The 16 additional SIC codes are 1021, 1031, 1041, 1044, 1061, 1099, 1221, 1222, 1231, 4911, 4931, 4939, 4953, 5169, 5171, and 7389.

approaches. Facilities are required to indicate, by a reporting code, the basis of their release estimate. TRI's reporting guidance is that, for most chemicals reasonably expected to be present but measured below the detection limit, facilities should use one-half the detection limit to estimate the mass released. However, for dioxins and dioxin-like compounds, nondetects should be treated as zero.

TRI allows facilities to report releases as specific numbers or as ranges, if appropriate. Specific estimates are encouraged if data are available to ensure the accuracy; however, EPA allows facilities to report releases in the following ranges: 1 to 10 pounds, 11 to 499 pounds, and 500 to 999 pounds. For its screening-level reviews, EPA used the mid-point of each reported range to represent a facility's releases, as applicable.

#### **4.1.4.1 Utility of TRI Data**

The data collected in TRI are particularly useful for ELG planning for the following reasons:

- TRI is national in scope, including data from all 50 states and U.S. territories;
- TRI includes releases to POTWs, not just direct discharges to surface water;
- TRI includes discharge data from manufacturing SIC codes and some other industrial categories; and
- TRI includes releases of many toxic chemicals, not just those in facility discharge permits.

#### **4.1.4.2 Limitations of TRI**

For purposes of ELG planning, limitations of the data collected in TRI include the following:

- Small establishments (less than 10 employees) are not required to report, nor are facilities that don't meet the reporting thresholds. Thus, facilities reporting to TRI may be a subset of an industry.
- Release reports are, in part, based on estimates, not measurements, and, due to TRI guidance, may overstate releases, especially at facilities with large wastewater flows.
- Certain chemicals (PACs, dioxin and dioxin-like compounds, metal compounds) are reported as a class, not as individual compounds. Because the individual compounds in most classes have widely varying toxic effects, the potential toxicity of chemical releases can be inaccurately estimated.

- Facilities are identified by SIC code, not point source category. For some SIC codes, it may be difficult or impossible to identify the point source category that is the source of the toxic wastewater releases.

Despite these limitations, EPA determined that the data summarized in *TRIRelases2002* and *TRIRelases2003* were usable for the 2005 and 2006 screening-level reviews and prioritization of the toxic-weighted pollutant loadings discharged by industrial categories. The TRI database remains the only data source for national estimates of industrial wastewater discharges of unregulated pollutants.

#### **4.1.5 Data from PCS**

PCS is a computerized information management system maintained by EPA's Office of Enforcement and Compliance Assurance (OECA). It was created to track permit, compliance, and enforcement status of facilities regulated by the NPDES program under the CWA. Among other things, PCS houses discharge data for these facilities.

More than 65,000 industrial facilities and wastewater treatment plants have permits for wastewater discharges to waters of the United States. To provide an initial framework for setting permitting priorities, EPA developed a major/minor classification system for industrial and municipal wastewater discharges. Major discharges almost always have the capability to impact receiving waters if not controlled and, therefore, have received more regulatory attention than minor discharges. There are approximately 6,400 facilities (including sewerage systems) with major discharges for which PCS has extensive records. Permitting authorities classify discharges as major based on an assessment of six characteristics:

- (1) Toxic pollutant potential;
- (2) Discharge flow: stream flow ratio;
- (3) Conventional pollutant loading;
- (4) Public health impact;
- (5) Water quality factors; and
- (6) Proximity to coastal waters.

Facilities with major discharges must report compliance with NPDES permit limits via monthly Discharge Monitoring Reports (DMRs) submitted to the permitting authority. The permitting authority enters the reported DMR data into PCS, including pollutant concentration and quantity values and identification of any types of permit violations.

Minor discharges may, or may not, adversely impact receiving water if not controlled. Therefore, EPA does not require DMRs for facilities with minor discharges. For this reason, the PCS database includes data only for a limited set of minor dischargers when the states choose to include these data.

Parameters in PCS include water quality parameters (such as pH and temperature), specific chemicals, conventional parameters (such as BOD<sub>5</sub> and total suspended solids (TSS)), and flow rates. Although other pollutants may be discharged, PCS contains only

data for the parameters identified in the facility's NPDES permit. Facilities typically report monthly average pounds per day discharged, but also report daily maxima and average pollutant concentrations.

For the 2005 annual review, EPA used data for reporting year 2002, to correspond to the data obtained from TRI. For the 2006 annual review, EPA corrected certain aspects of the 2002 data in response to comments (see Section 4.2). EPA also explored the use of PCS nutrients data but decided not to use nutrients data at this time, because of data quality concerns. EPA did not use data for reporting year 2003 because, based on comparisons of 2000, 2001, and 2002 PCS data for certain industrial categories, 2003 discharges were not likely to change significantly from 2002, and also because the creation of the *PCSLoads* database is labor-intensive. To develop the *PCSLoads2002* database, EPA used its Effluent Data Statistics (EDS) program, an automated query system, to calculate annual pollutant discharges using the monthly reports in PCS. The 2005 SLA Report provides details on the methodology and development of *PCSLoads2002* (U.S. EPA, 2005b).

#### **4.1.5.1 Utility of PCS**

The data collected in PCS are particularly useful for the ELG planning process for the following reasons:

- PCS is national in scope, including data from all 50 states and U.S. territories.
- Discharge reports included in PCS are based on effluent chemical analysis and metered flows.
- PCS includes facilities in all SIC codes.
- PCS includes data on conventional pollutants for most facilities and for the nutrients nitrogen and phosphorus for many facilities. However, EPA did not use the nutrient data because of data quality concerns.

#### **4.1.5.2 Limitations of PCS**

Limitations of the data collected in PCS include the following:

- PCS contains data only for pollutants a facility is required by permit to monitor; the facility is not required to monitor or report all pollutants actually discharged.
- Some states do not submit all DMR data to PCS, or do not submit the data in a timely fashion.
- PCS includes very limited discharge monitoring data from minor dischargers.

- PCS does not include data characterizing indirect discharges from industrial facilities to POTWs.
- Some of the pollutant parameters included in PCS are reported as a group parameter and not as individual compounds (e.g., “Total Kjeldahl Nitrogen,” “oil and grease”). Because the individual compounds in the group parameter may have widely varying toxic effects, the potential toxicity of chemical releases can be inaccurately estimated.
- In some cases, the PCS database identifies the type of wastewater (e.g., process wastewater, stormwater, noncontact cooling water) being discharged; however, most do not and, therefore, total flow rates reported to PCS may include stormwater and noncontact cooling water, as well as process wastewater.
- Pipe identification is not always clear. For some facilities, internal monitoring points are labeled as outfalls, and PCS may double-count a facility’s discharge. In other cases, an outfall may be labeled as an internal monitoring point, and PCS may not account for all of a facility’s discharge.
- Facilities provide SIC code information for only the primary operations, even though data may represent other operations as well. In addition, some facilities do not provide information on applicable SIC codes.
- Facilities are identified by SIC code, not point source category. For some SIC codes, it may be difficult or impossible to identify the point source category that is the source of the reported wastewater discharges.
- PCS was designed as a permit compliance tracking system and does not contain production information.
- PCS data may be entered into the database manually, which leads to data-entry errors.
- In PCS, data may be reported as an average quantity, maximum quantity, average concentration, maximum concentration, and minimum concentration. For many facilities and/or pollutants, average quantity values are not provided. In these cases, EPA is limited to estimating facility loads based on the maximum quantity. Section 4.4.2 discusses the maximum quantity issue in detail.

Despite these limitations, EPA determined that the data summarized in *PCSLoads2002* were usable for the 2006 screening-level review and prioritization of the toxic-weighted pollutant loadings discharged by industrial facilities. The PCS database remains the only data source quantifying the pounds of regulated pollutants discharged directly to surface waters of the United States.

## **4.2 Methodology Corrections Affecting Both Screening-Level Review Databases**

The 2005 SLA Report provides detailed information on the methodology EPA used to develop the screening-level review databases (U.S. EPA, 2005b). After publication of the 2006 Preliminary Plan (see 70 FR 51042-51060, August 29, 2005), EPA received comments on its methodology, including the development of the *TRIRelases2002\_v2* and the *PCSLoads2002\_v2* databases. This subsection summarizes the comments received and the actions taken by EPA in response to the comments.

### **4.2.1 Summary of *TRIRelases* and *PCSLoads* Database Methodology Changes**

For comments that led to a change in database methodologies, Table 4-1 summarizes pollutants that were identified by commenters, the affected pollutant and database, the comment or issue, and EPA's responding action. For more detailed information about these comments, see the memoranda entitled, *Response to Comments: Database Methodology Issues* (Bartram, 2006), *Comments Received Regarding Toxic-Weighting Factors* (Bicknell, 2006b), and *Comments Received Regarding POTW Removals* (Bicknell, 2006a).

### **4.2.2 Summary of *TRIRelases* and *PCSLoads* Database Methodology Comments Resulting in No Changes**

EPA received comments in addition to those discussed in Section 4.2.1, but ultimately found that they did not affect the database results. Typically these comments did not impact the databases because the subject pollutant was not discharged or was discharged in very small amounts. For this reason, and for other reasons listed in Table 4-2, EPA did not revise its database development methodologies in response to these comments. EPA summarized its analyses of these issues and its findings in a series of memoranda. Table 4-2 lists the comment issues raised, the reason no action was taken, and the corresponding memoranda.

**Table 4-1. Summary of Database Changes Applicable to Both *TRI Releases* and *PCSLoads* Based on Database Methodology Comments**

| Pollutant/Issue                               | Database | Comment/Issue  | Changes to Database   |
|---|----------|--|---|
| Mass Discharges without “Less than” Indicator | PCS      | PCS includes data for mass discharges for some facilities without a “less than” indicator, even when the concentration included in PCS is labeled as below the detection limit.  | For the facilities named in the comments, EPA corrected the loads in <i>PCSLoads2002</i> to treat the mass quantity discharges as below the detection limit.  |
| Nitrites                                      | PCS      | The nitrite ion is unstable in water and will oxidize to nitrate.  | Assuming nitrite will oxidize to nitrate, EPA calculated the pounds of nitrogen in the reported nitrite discharges (i.e., nitrite as N) and used the TWF for nitrate as N (0.0032) to calculate TWPE of nitrites. Previously, EPA used a TWF value of 0.0056.   |
| Cyanide Compounds                             | TRI      | The TWF used for “cyanide compounds” reported to TRI is too low.   | EPA changed the “cyanide compounds” TWF to the median value of eight cyanide compounds, 0.0054, because this is consistent with EPA approach for other group compounds.   |
| Nitric Acid                                   | TRI      | Nitric acid will fully dissociate into nitrate and hydrogen ions in aqueous solution.  | EPA changed the POTW removal rate for nitric acid to the POTW removal for nitrate (90%), and changed the TWF for nitric acid to the TWF for nitrate (0.000747).   |
| Sodium Nitrite                                | TRI      | Sodium nitrite is an ionic salt that will fully dissociate into nitrite and sodium ions in aqueous solution. The nitrite ions are unstable in water and will oxidize to nitrate. | Assuming sodium nitrite will dissociate and the nitrite will oxidize to nitrate, EPA calculated the pounds of nitrogen in the reported sodium nitrite discharges (i.e., sodium nitrite as N) and used the TWF for nitrate as N (0.0032) to calculate TWPE of sodium nitrite. EPA also used the POTW removal rate for nitrate (90%, previously 1.87%) to account for the removal of sodium nitrite in POTWs.                       |
| Dinitrotoluene (mixed isomers)                | TRI      | The POTW removal rate for dinitrotoluene (mixed isomers) is too low. The TWF for dinitrotoluene is too high.   | EPA has POTW removal rate data for two dinitrotoluene isomers and changed the POTW removal rate for dinitrotoluene (mixed isomers) to the average of the two isomer removal rates, 62%. EPA has TWF data for five dinitrotoluene isomers and changed the dinitrotoluene (mixed isomers) TWF to the median TWF of the five isomers: 0.0431. Both of these approaches are consistent with EPA’s approach for other group compounds. |
| Chlorophenols                                 | TRI      | The chlorophenols TWF was based on the TWF for pentachlorophenol from August 2004.   | EPA changed the chlorophenols TWF to equal the median value of six chlorophenols included in the TRI chemical group, 0.0555, because this is consistent with EPA’s approach for other group compounds.  |
| Chlorine                                      | TRI      | The POTW removal rate for chlorine is unreasonably low (1.87%) based on its chemistry in water and its addition to treatment systems as a disinfectant.                          | Assuming that chlorine entering POTW will be completely reduced to chloride, EPA changed the POTW removal rate for chlorine to 100 percent.   |

Table 4-1 (Continued)

| Pollutant/Issue              | Database | Comment/Issue   | Changes to Database   |
|------------------------------|----------|---|---|
| Hydrogen Cyanide             | TRI      | The POTW removal rate for hydrogen cyanide (7%) is low compared to the POTW removal rate for cyanide compounds (70%). | EPA changed the hydrogen cyanide POTW removal rate to equal the cyanide compounds POTW removal rate, 70%, because both hydrogen cyanide and cyanide compounds dissociate in water.                                      |
| Phosphorus (yellow or white) | TRI      | Phosphorus (yellow or white) is insoluble in water.   | EPA deleted all phosphorus (yellow or white) discharges reported to TRI as "transferred to POTWs" because facilities incorrectly reported total phosphorus as elemental phosphorus (yellow or white).                   |
| Fumes and Dust               | TRI      | "Fumes and dusts" are mixtures of solids and gases and do not exist in water.   | EPA deleted the reported discharges for aluminum (fume or dust) and zinc (fume or dust) from <i>TRIReleases2002_v4</i> and <i>TRIReleases2003_v2</i> because "fumes and dust" are air pollutants, not water pollutants. |

Source: Memoranda *Response to Comments: Database Methodology Issues* (Bartram, 2006); *Comments Received Regarding Toxic-Weighting Factors* (Bicknell, 2006b); and *Comments Received Regarding POTW Removals* (Bicknell, 2006a).

**Table 4-2. Summary of Comments on Database Methodologies Applicable to Both TRIReleases and PCSLoads for Which EPA Did Not Take Action**

| Issue Raised in Comment   | Reason EPA Did Not Take Action on Comment   | Memorandum Describing EPA Analysis and Findings  |
|---|---|--|
| Chlorine Dioxide POTW Removal<br>Phenol Compounds POTW Removal<br>Ozone POTW Removal<br>Hydrazine Sulfate POTW Removal<br>Titanium Tetrachloride POTW Removal<br>Ammonium Sulfate POTW Removal<br>Ammonium Nitrate POTW Removal<br>Phosphine POTW Removal   | Pollutant was not discharged or was discharged in very small amounts and therefore does not impact the databases.   | Memorandum entitled, <i>Comments Received Regarding POTW Removals</i> , dated September 8, 2006 (Bicknell, 2006a).           |
| Methyl Mercury TWF<br>PACs TWF<br>Cyanide TWF<br>Inorganic Metallic Salts TWFs<br>Organometallic Compounds TWFs<br>Chlorine Dioxide TWF<br>TWFs for Compounds That Do Not Exist In Water<br>TWFs For Chemicals Without A Wastewater Method For Detection  | Pollutant was not discharged or was discharged in very small amounts and therefore does not impact the databases.   | Memorandum entitled, <i>Comments Received Regarding Toxic-Weighting Factors</i> , dated September 8, 2006 (Bicknell, 2006b). |
| Facilities Reporting the Same Concentration Each Month<br>Use of Maximum Values to Calculate Annual Loads (also discussed in Section 4.2.2)<br>Use of Internal Monitoring Points to Calculate Annual Loads in PCS<br>Use of the Hybrid Approach for Treatment of Measurements Below the Detection Limit (see the 2005 SLA Report for more details)<br>Use of Data on Intake Pollutants<br>Batch vs. Continuous Discharges | Did not have large impact on the database.<br>Maximum values are used only where average values are not available in PCS.<br>There is no systematic way to identify internal monitoring points in the database.<br>EPA believes that this is a valid approach for the screening-level review.<br>Intake pollutants are not typically reported in PCS.<br>There is no systematic way to identify batch discharges in the database. | <i>Response to Comments: Database Methodology Issues</i> dated November 2006 (Bartram, 2006)                                 |

### 4.2.3 Revisions to TWF Development

In addition to comments on database methodology, EPA received comments on how it develops TWFs. EPA reviewed and incorporated changes, as applicable, to the TWFs for which it received comments. The Final TWF Development Document, dated June 2006 (U.S. EPA, 2006a), explains how EPA revised some TWF values from the 2004 Final Plan to the values used to support the 2006 Final Plan, which are included in the “2006 TWFs” database. As discussed in the TWF Development Document, EPA has developed TWFs for over 1,000 chemicals. EPA made the following general changes to the TWF database between the 2006 Preliminary Plan and the 2006 Final Plan:

- EPA revised TWFs for 13 chemicals based on data corrections/improvements;
- EPA developed new TWFs for 12 chemicals that did not previously have TWFs assigned, such as nicotine; and
- EPA revised TWFs for 12 chemicals based on TWF revisions carrying through to other chemicals (e.g., the TWF change to nitrate affects the TWF for chemicals based on nitrate, such as sodium nitrite).

Table 4-3 lists TWFs that changed between the 2006 Preliminary Plan and the 2006 Final Plan, including the new TWFs. Table 4-4 presents the chemicals in *PCSLoads2002* with the largest change in TWPE when EPA used the 2006 TWFs compared to the 2004 TWFs<sup>6</sup>. The changes in TWF for these chemicals are small; however, because some of the pollutants are discharged in large quantities, they result in a substantial change in TWPE. For example, manganese showed the largest and only major increase in TWPE (over 600,000 pound-equivalents).

Table 4-5 presents the chemicals in *TRIReleases2002* with the largest change in TWPE when EPA used the 2006 TWFs. As with the PCS database, the changes in TWF for these chemicals are small; however, because some of the pollutants are discharged in large quantities, they result in a substantial change in TWPE. As with PCS, manganese and manganese compounds showed the largest change in TWPE, with an increase of over 400,000 pound-equivalents.

---

<sup>6</sup> The 2004 TWFs refer to the December 2004 TWFs that are referenced in the 2005 SLA Report (U.S. EPA, 2005b). This term does not refer to the August 2004 TWFs, which are also described in the 2005 SLA Report.

Table 4-3. TWFs Revised in 2006

| Pollutant  | CAS Number | 2004 TWF | 2006 TWF |
|--|------------|----------|----------|
| <b>TWFs Revised by EPA in Response to Comments on the Draft TWF Development Document</b> |            |          |          |
| Alachlor / Lasso   | 15972608   | 1.78     | 1.52     |
| Ammonia as NH <sub>3</sub>   | 7664417    | 0.00151  | 0.00111  |
| Atrazine   | 1912249    | 2.31     | 1.04     |
| Benzo(a)anthracene   | 56553      | 36.3     | 30.7     |
| Chloroethene   | 75014      | 0.0855   | 0.23     |
| Cyanazine  | 21725462   | 0.00572  | 2.07     |
| Dibenzo(a,h)anthracene   | 53703      | 30.7     | 30.8     |
| Dichloroethene, 1,1-   | 75354      | 0.176    | 0.471    |
| Fluoranthene   | 206440     | 0.829    | 1.28     |
| Manganese  | 7439965    | 0.0144   | 0.0704   |
| Nitrate  | 14797558   | 0.0056   | 0.000747 |
| Simazine   | 122349     | 0.642    | 0.308    |
| Tributyltin (TBT)  | 688733     | 88.9     | 77.8     |
| <b>New TWFs Developed by EPA</b>   |            |          |          |
| 1-nitropyrene  | 5522430    | NA       | 0.026    |
| 2,6-diethylaniline (alachlor degradation product)  | 579668     | NA       | 0.00537  |
| Acetochlor   | 34256821   | NA       | 0.147    |
| Bromobenzene   | 108861     | NA       | 0.0166   |
| DCPA di-acid degradate   | 2136790    | NA       | 0.00041  |
| Dibenzo(c,g)carbazole, 7H-   | 194592     | NA       | 0.0303   |
| Nicotine   | 54115      | NA       | 0.0016   |
| Nitrate (as N)   | N          | NA       | 0.0032   |
| Nitrogen-total, K, organic (as N)  | N_as_N     | NA       | 0.00228  |
| Perchlorate  | 14797730   | NA       | 0.00206  |
| Trinitro-triazine, hexahydro-/   | 121824     | NA       | 0.00415  |
| Triazines  | Triazines  | NA       | 2.46     |
| <b>TWFs Affected by Revisions to Other TWFs</b>  |            |          |          |
| Chlorophenols  | N084       | 0.442    | 0.0555   |
| Creosote   | 8001589    | 1.35     | 1.36     |
| Cyanide compounds  | N106       | 0.00263  | 0.0054   |
| Dinitrotoluene (mixed isomers)   | 25321146   | 0.642    | 0.0431   |
| Manganese compounds  | N450       | 0.0144   | 0.0704   |
| Nitrate compounds  | N511       | 0.000062 | 0.000747 |
| Nitric acid  | 7697372    | NA       | 0.000747 |
| Nitrites   | 14797650   | 0.373    | 0.0032   |
| PACs (Petroleum Refining)  | N590       | 26.3     | 25.4     |
| PACs (Pulp and Paper)  | N590       | 34.2     | 33.7     |
| PACs (Wood Preserving)   | N590       | 8.36     | 8.33     |
| Sodium Nitrite (as N)  | N1000      | 0.373    | 0.0032   |

Source: *Toxic Weighting Factor Development in Support of the CWA 304(m) Planning Process* (U.S. EPA, 2006a).  
 NA – Not applicable; TWFs were not developed for the 2004 analysis.

**Table 4-4. Chemicals with the Largest Change in TWPE in PCSLoads2002 Resulting from 2006 Revised TWFs**

| Parameter                                | Lbs/Yr Reported Discharged | TWF     |          | Change in TWF <sup>a</sup> | TWPE    |         | Change in TWPE <sup>a</sup> |
|--|----------------------------|---------|----------|----------------------------|---------|---------|-----------------------------|
|  |                            | 2004    | 2006     |                            | 2004    | 2006    |                             |
| Manganese                                | 10,700,000                 | 0.0144  | 0.0704   | 0.056                      | 155,000 | 756,000 | 601,000                     |
| Nitrogen, Nitrite Total (as N)           | 292,000                    | 0.373   | 0.0032   | (0.37)                     | 109,000 | 933     | (108,000)                   |
| Nitrogen, Nitrate Total (as N)           | 18,900,000                 | 0.0056  | 0.0032   | (0.0024)                   | 106,000 | 60,600  | (45,500)                    |
| Nitrite Plus Nitrate Total 1 Det. (as N) | 7,980,000                  | 0.0056  | 0.0032   | (0.0024)                   | 44,700  | 25,500  | (19,200)                    |
| Nitrogen, Ammonia                        | 24,400,000                 | 0.00151 | 0.00111  | (0.000395)                 | 36,700  | 27,100  | (9,640)                     |
| Benzo(a)Anthracene                       | 320                        | 36.3    | 30.7     | (5.57)                     | 11,600  | 9,810   | (1,780)                     |
| Nitrite Nitrogen, Dissolved (as N)       | 4,090                      | 0.373   | 0.0032   | (0.37)                     | 1,530   | 13      | (1,520)                     |
| Nitrogen, Nitrate Total (as NO3)         | 56,900                     | 0.0056  | 0.000747 | (0.00485)                  | 319     | 43      | (276)                       |
| Ammonia                                  | 692,000                    | 0.00151 | 0.00111  | (0.000395)                 | 1,040   | 768     | (274)                       |
| Fluoranthene                             | 377                        | 0.829   | 1.28     | 0.456                      | 313     | 485     | 172                         |
| Vinyl Chloride                           | 842                        | 0.0855  | 0.23     | 0.144                      | 72      | 193     | 121                         |
| Nitrogen, Nitrite Total (as NO2)         | 254                        | 0.373   | 0.0032   | (0.37)                     | 95      | 0.81    | (94)                        |
| Dibenzo (a,h) Anthracene                 | 23                         | 30.7    | 30.8     | 0.112                      | 691     | 693     | 2.5                         |
| Alachlor (Brand Name-Lasso)              | 8                          | 1.78    | 1.52     | (0.259)                    | 15      | 13      | (2.2)                       |
| Benzo(ghi)Perylene                       | 0.00714                    | 0.3     |          | -                          | 0.0021  |         | -                           |
| Rdx, Total                               | 43                         |         | 0.00415  | -                          |         | 0.18    | -                           |

Source: PCSLoads2002\_v4.

<sup>a</sup>Decreases in TWF and TWPE are indicated by the values enclosed in parentheses.

Table 4-5. Chemicals with the Largest Changes in TWPE for TRI Databases Resulting from 2006 Revised TWFs

| Chemical Name                                      | TWF                |          | Change in TWF <sup>a</sup> | TRI 2002                   |                      |           |                             | TRI 2003                   |                      |           |                             |
|--|--------------------|----------|----------------------------|----------------------------|----------------------|-----------|-----------------------------|----------------------------|----------------------|-----------|-----------------------------|
|  | 2004               | 2006     |                            | Lbs/Yr Reported Discharged | 2004 TWPE            | 2006 TWPE | Change in TWPE <sup>a</sup> | Lbs/Yr Reported Discharged | 2004 TWPE            | 2006 TWPE | Change in TWPE <sup>a</sup> |
| Manganese and Manganese Compounds                  | 0.0144             | 0.0704   | 0.056                      | 7,180,000                  | 104,000              | 506,000   | 402,000                     | 7,210,000                  | 104,000              | 508,000   | 404,000                     |
| Sodium Nitrite (as N)                              | 0.373 <sup>b</sup> | 0.0032   | (0.37)                     | 580,000                    | 217,000 <sup>b</sup> | 1,860     | (215,000)                   | 306,000                    | 114,000 <sup>b</sup> | 980       | (113,000)                   |
| Nitrate Compounds                                  | 0.000062           | 0.00075  | 0.000685                   | 222,000,000                | 13,800               | 166,000   | 152,000                     | 207,000,000                | 12,800               | 155,000   | 142,000                     |
| Dinitrotoluene (Mixed Isomers)                     | 0.642              | 0.0431   | (0.599)                    | 28,700                     | 18,400               | 1,240     | (17,200)                    | 26,300                     | 16,900               | 1,130     | (15,700)                    |
| Creosote   | 1.35               | 1.36     | 0.0127                     | 11,800                     | 15,800               | 1,740     | (14,100)                    | 8,410                      | 11,300               | 2,220     | (9,100)                     |
| Ammonia  | 0.00151            | 0.00111  | (0.000395)                 | 10,700,000                 | 16,100               | 11,900    | (4,230)                     | 14,200,000                 | 21,300               | 15,700    | (5,610)                     |
| Polycyclic Aromatic Compounds (Petroleum Refining) | 26.3               | 25.4     | (0.861)                    | 3,290                      | 86,400               | 83,600    | (2,830)                     | 1,290                      | 33,900               | 32,800    | (1,110)                     |
| Atrazine   | 2.31               | 1.04     | (1.27)                     | 794                        | 1,830                | 826       | (1,010)                     | 3,810                      | 8,800                | 3,960     | (4,840)                     |
| Polycyclic Aromatic Compounds (Pulp and Paper)     | 34.2               | 33.7     | (0.544)                    | 1,420                      | 48,700               | 47,900    | (774)                       | 1,390                      | 47,500               | 46,800    | (756)                       |
| Cyanide Compounds                                  | 0.00263            | 0.0054   | 0.00277                    | 88,300                     | 232                  | 477       | 245                         | 76,100                     | 200                  | 411       | 211                         |
| Nitric Acid  | 0                  | 0.000747 | 0.000747                   | 282,000                    | 0                    | 211       | 211                         | 306,000                    | 0                    | 228       | 228                         |
| Vinyl Chloride                                     | 0.0855             | 0.23     | 0.144                      | 577                        | 49                   | 133       | 83                          | 384                        | 33                   | 88        | 55                          |
| Cyanazine  | 0.00572            | 2.07     | 2.06                       | 28                         | 0.16                 | 58        | 58                          | 39                         | 0.22                 | 81        | 81                          |
| Simazine   | 0.642              | 0.308    | (0.334)                    | 87                         | 56                   | 27        | (29)                        | 93                         | 60                   | 29        | (31)                        |
| Vinylidene Chloride                                | 0.176              | 0.471    | 0.296                      | 39                         | 6.8                  | 18        | 12                          | 10                         | 1.7                  | 4.6       | 2.9                         |
| Chlorophenols                                      | 0.442              | 0.0555   | (0.386)                    | 20                         | 8.8                  | 1.1       | (7.7)                       | 73                         | 32                   | 4.1       | (28)                        |
| Alachlor   | 1.78               | 1.52     | (0.259)                    | 13                         | 23                   | 20        | (3.4)                       | 15                         | 27                   | 23        | (3.9)                       |
| Polycyclic Aromatic Compounds (Wood Preserving)    | 8.36               | 8.33     | (0.026)                    | 57                         | 475                  | 473       | (1.5)                       | 40                         | 331                  | 330       | (1.0)                       |
| Benzo(g,h,i)Perylene                               | 0.3                |          |                            |                            |                      |           |                             |                            |                      |           |                             |

Source: *TRIReleases2002\_v4* and *TRIReleases2003\_v2*.

<sup>a</sup>Decreases in TWF and TWPE are indicated by the values enclosed in parentheses.

<sup>b</sup>For sodium nitrite, EPA changed the calculation methodology as well as the TWF, in response to comments. The 2004 TWF (0.373) is for sodium nitrite. The 2004 TWPE (217,000 for TRI 2002 and 114,000 for TRI 2003) represent the new methodology of using the pounds of “sodium nitrite as N” (14.01 molecular weight) instead of sodium nitrite (NaNO<sub>2</sub>, or 69.00 molecular weight). See also Section 4.2.1 (Table 4-1).

#### 4.2.4 Conclusions

The changes in methodology EPA used to develop *PCSLoads2002*, *TRIReleases2002*, and *TRIReleases2003* databases significantly affected the total TWPE estimated for industrial discharges. The largest change resulted from changes in the TWF and POTW removal used for sodium nitrite. The estimated TWPE of sodium nitrite discharges decreased from 1.7 million (*TRIReleases2002\_v2*) to 1,860 (*TRIReleases2002\_v4*). The manganese and nitrate TWF changes also had significant impacts on the estimates of TWPE discharges from all the databases because of the large quantities of loadings associated with both pollutants. Although these changes had significant impacts for certain pollutants and industrial categories, the methodology changes did not significantly affect the category rankings that EPA used to prioritize the categories for further review.

#### 4.3 Corrections Affecting Only the *TRIReleases* Databases

For the 2006 annual review, EPA compiled *TRIReleases2002\_v4* and *TRIReleases2003\_v2*, using 2002 and 2003 TRI data, respectively. The *2005 Annual Screening-Level Analysis Report* provides details on the methodology for developing *TRIReleases2002*; EPA used the same methodology for the 2003 data (U.S. EPA, 2005b). This section describes changes made to the *TRIReleases* database methodology after publication of the 2006 Preliminary Plan.

##### 4.3.1 TWF Changes for Compound Groups

Not all chemicals on the TRI chemical list are individual chemicals. Some are compound groups, which consist of a group of chemicals that are of similar structure, such as dioxin and dioxin-like compounds and polycyclic aromatic compounds (PACs) (which are discussed in this subsection). EPA develops TWFs for specific chemicals and not for these compound groups. EPA has developed methodologies to assign TWFs to several of the TRI compound groups, typically using known TWFs for chemicals within the group.

In some cases, EPA calculated industry-specific TWFs for certain chemical compound categories. EPA created specific TWFs when it had additional information about the composition of the compound category, as released from specific industries. The remainder of this subsection describes how EPA developed the TWFs, in the following order:

- Dioxin and dioxin-like compounds;
- Creosote for all industrial categories;
- PACs for all industrial categories, except petroleum refining, wood preserving, and pulp, paper, and paperboard;
- Petroleum refining PACs;
- Wood preserving PACs; and
- Pulp, paper, and paperboard PACs.

#### 4.3.1.1 Dioxin and Dioxin-Like Compounds

The term ‘dioxin and dioxin-like compounds’ refers to polychlorinated dibenzo-p-dioxins (CDDs) and polychlorinated dibenzofurans (CDFs), which constitute a group of PBT chemicals. There are 17 CDDs and CDFs congeners with chlorine substitution of hydrogen atoms at the 2, 3, 7, and 8 positions on the benzene rings, the most toxic of which is 2,3,7,8-tetrachlorodibenzo-p-dioxin (TCDD). The 17 compounds (called congeners) are referred to as ‘dioxin-like,’ because they have similar chemical structure, similar physical-chemical properties, and invoke a common battery of toxic responses (U.S. EPA, 2000), though the toxicity of the congeners varies greatly.

Toxic equivalency factors (TEFs), developed by the World Health Organization, assess the relative toxicities of the 17 compounds, to simplify risk assessment and regulatory control of exposures to dioxins. As defined by Van den Berg, et al., a TEF is a relative potency value that is based on the results of several *in vivo* and *in vitro* studies (Van den Berg, 1998). TEFs are order-of-magnitude estimates of the toxicity of a compound relative to 2,3,7,8-TCDD. TEFs, along with the measured concentration of dioxin congeners are used to calculate toxic equivalent (TEQ) concentrations.

EPA developed TWFs for each of the 17 dioxin congeners, ranging from 2,021 for octachlorodibenzofuran to 703,584,000 for 2,3,7,8-TCDD, using the methodology discussed in the TWF TDD (U.S. EPA, 2006a). Due to their toxicity and ability to bioaccumulate, the various congeners of dioxin have high TWFs relative to most chemicals. Consequently, even small mass amounts of dioxin and dioxin-like compound discharges translate into high TWPEs. Table 4-6 presents the TEFs and TWFs used in the 2006 screening-level analysis for each of the 17 dioxin congeners.

Beginning with reporting year 2000, facilities meeting certain reporting criteria are required to report to TRI the total mass, in grams, of the 17 dioxin and dioxin-like compounds released to the environment every year. This reporting method does not account for the relative toxicities of the 17 compounds. Reporting facilities are given the opportunity to report a facility-specific congener distribution. Yet even if dioxin and dioxin-like compounds are released to more than one medium, the facility can report only one distribution. Therefore, EPA cannot know if the single dioxin congener distribution reported by a facility accurately reflects the dioxin congener distribution in wastewater. Nevertheless, it is the best available information, and EPA uses it to calculate the reporting facility’s dioxin and dioxin-like compounds TWPE.

To account for the relative toxicities of the various dioxin congeners, EPA first converted the reported discharges of dioxin and dioxin-like compounds discharges from grams to pounds because the TWPE is associated with pounds and not grams. EPA then estimated the TWPE of dioxin and dioxin-like compounds using the facility-specific congener distributions for all facilities that reported a distribution. Based on information provided by facilities, EPA made corrections to the reported dioxin distributions for several facilities. Section 4.3.2 discusses these corrections in more detail.

**Table 4-6. Dioxin and Dioxin-Like Compounds and Their Toxic Weighting Factors**

| CAS Number  | Chemical Name                              | Abbreviated Name     | Toxic Equivalency Factor | Toxic Weighting Factor |
|-------------|--|----------------------|--------------------------|------------------------|
| <b>CDDs</b> |  |                      |                          |                        |
| 1746-01-6   | 2,3,7,8-tetrachlorodibenzo-p-dioxin        | 2,3,7,8-TCDD         | 1                        | 704,000,000            |
| 40321-76-4  | 1,2,3,7,8-pentachlorodibenzo-p-dioxin      | 1,2,3,7,8-PeCDD      | 1                        | 693,000,000            |
| 39227-28-6  | 1,2,3,4,7,8-hexachlorodibenzo-p-dioxin     | 1,2,3,4,7,8-HxCDD    | 0.1                      | 23,500,000             |
| 57653-85-7  | 1,2,3,6,7,8-hexachlorodibenzo-p-dioxin     | 1,2,3,6,7,8-HxCDD    | 0.1                      | 9,560,000              |
| 19408-74-3  | 1,2,3,7,8,9-hexachlorodibenzo-p-dioxin     | 1,2,3,7,8,9-HxCDD    | 0.1                      | 10,600,000             |
| 35822-46-9  | 1,2,3,4,6,7,8-heptachlorodibenzo-p-dioxin  | 1,2,3,4,6,7,8-HpCDD  | 0.01                     | 411,000                |
| 3268-87-9   | 1,2,3,4,6,7,8,9-octachlorodibenzo-p-dioxin | 1,2,3,4,6,7,8,9-OCDD | 0.0001                   | 6,590                  |
| <b>CDFs</b> |  |                      |                          |                        |
| 51207-31-9  | 2,3,7,8-tetrachlorodibenzofuran            | 2,3,7,8-TCDF         | 0.1                      | 43,800,000             |
| 57117-41-6  | 1,2,3,7,8-pentachlorodibenzofuran          | 1,2,3,7,8-PeCDF      | 0.05                     | 7,630,000              |
| 57117-31-4  | 2,3,4,7,8-pentachlorodibenzofuran          | 2,3,4,7,8-PeCDF      | 0.5                      | 557,000,000            |
| 70648-26-9  | 1,2,3,4,7,8-hexachlorodibenzofuran         | 1,2,3,4,7,8-HxCDF    | 0.1                      | 5,760,000              |
| 57117-44-9  | 1,2,3,6,7,8-hexachlorodibenzofuran         | 1,2,3,6,7,8-HxCDF    | 0.1                      | 14,100,000             |
| 72918-21-9  | 1,2,3,7,8,9-hexachlorodibenzofuran         | 1,2,3,7,8,9-HxCDF    | 0.1                      | 47,300,000             |
| 60851-34-5  | 2,3,4,6,7,8-hexachlorodibenzofuran         | 2,3,4,6,7,8-HxCDF    | 0.1                      | 51,200,000             |
| 67562-39-4  | 1,2,3,4,6,7,8-heptachlorodibenzofuran      | 1,2,3,4,6,7,8-HpCDF  | 0.01                     | 85,800                 |
| 55673-89-7  | 1,2,3,4,7,8,9-heptachlorodibenzofuran      | 1,2,3,4,7,8,9-HpCDF  | 0.01                     | 3,030,000              |
| 39001-02-0  | 1,2,3,4,6,7,8,9-octachlorodibenzofuran     | 1,2,3,4,6,7,8,9-OCDF | 0.0001                   | 2,020                  |

Source: *EPCRA Section 313 Guidance for Reporting Toxic Chemicals Within the Dioxins and Dioxin-Like Compounds Category* (U.S. EPA, 2000); *Toxic Equivalency Factors (TEFs) for PCBs, PCDDs, PCDFs, for Humans and Wildlife* (Van den Berg, 1998); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

EPA calculated an average dioxin distribution for each SIC code that had reported discharges of dioxin and dioxin-like compounds. For facilities that did not report a dioxin distribution, EPA used the average SIC code distribution to calculate the facility's dioxin and dioxin-like compounds TWF. For facilities that did not report a congener distribution and did not have any facilities within its SIC code that reported a congener distribution, EPA used a TWF equal to 10,595,840 (the median of the 17 dioxin congener TWFs).

In the 2006 Preliminary Plan, for facilities in the Pulp, Paper, and Paperboard Point Source Category that did not report a dioxin distribution, EPA calculated an average dioxin distribution for each regulatory phase, not the SIC code<sup>7</sup>. However, for the 2006 screening-level

<sup>7</sup> A 1988 legal suit obligated EPA to address discharges of polychlorinated dibenzo-(p)-dioxins and polychlorinated dibenzofurans from 104 bleaching pulp mills, including nine dissolving pulp mills. During its response to this suit, EPA decided to review and revise the Pulp and Paper Category regulations in three "regulatory phases." Phase I is Subpart B, Bleached Papergrade Kraft and Soda and Subpart E, Papergrade Sulfite. Phase II is categories that do not bleach chemical pulp with chlorine: Subpart C, Unbleached Kraft; Subpart F, Semi-Chemical; Subpart G, Groundwood, Chemi-Mechanical, and Chemi-Thermo-Mechanical; Subpart H, Non-Wood Chemical Pulp; Subpart

review, EPA used a different approach. The National Council for Air and Stream Improvement (NCASI) developed an emission factor for pulp and paper mills to use for estimating dioxin discharges for reporting to TRI. The emission factor is based on the average mill effluent concentrations measured from four bleached kraft mills. EPA assumed that all pulp and paper mills had the same dioxin distribution as the mills used to develop the emission factor. However, EPA developed facility-specific wastewater dioxin congener distributions when a facility-specific dioxin congener distribution was available (Matuszko, 2006).

#### **4.3.1.2 Creosote**

Creosote is a commonly used wood preservative, comprising many different chemicals. EPA did not develop a TWF for creosote using creosote toxicity data. Instead, EPA used the chemical composition of creosote, provided in IARC Monographs, Vol 35, “Coal Tar and Derived Products,” (IARC, 1985), and the TWFs for these individual chemicals to calculate a TWF for creosote. In developing the TWF for creosote, EPA assumed the chemicals will be present in wastewater in the same proportion that they are present in the creosote.

Using the data provided in IARC Monographs, Vol 35 (IARC, 1985), EPA calculated the average percentage that the chemical represents in creosote based on the high and low values. EPA calculated an adjusted TWF for each chemical by multiplying its chemical-specific TWF by its average percentage in creosote. EPA summed these values to calculate a new overall TWF for creosote discharges. The current creosote TWF has been updated since the 2006 Preliminary Plan because several individual chemical TWFs for creosote changed. Table 4-7 lists the chemical composition of creosote, along with the associated TWF of the various chemicals.

#### **4.3.1.3 Polycyclic Aromatic Compounds (PACs)**

PACs, sometimes known as polycyclic aromatic hydrocarbons (PAHs), are a class of organic compounds consisting of three or more fused aromatic rings. PACs are classified as persistent, bioaccumulative and toxic (PBT) chemicals. They are likely present in petroleum products such as crude oil, fuel oil, diesel fuel, gasoline, and paving asphalt (bituminous concrete) and refining by-products such as heavy oils, crude tars, and other residues. PACs form as the result of incomplete combustion of organic compounds.

For TRI, facilities that manufacture, process, or otherwise use more than 100 pounds of PACs per year must report the combined mass of PACs released; they do not report releases of individual compounds. Table 4-8 lists the 21 individual compounds in the PAC category for TRI reporting, CAS number, and TWF, if available. EPA has TWFs for only 10 of the 21 PAC chemicals. For the 2006 annual review, EPA revised the TWFs for three PACs (benzo(a)anthracene, benzo(j,k)fluorene, and dibenzo(a,h)anthracene) and developed new TWFs for two PACs (7H-dibenzo(e,g)carbazole and 1-Nitropyrene).

---

I, Secondary Fiber Deink; Subpart J, Secondary Fiber Non-Deink; Subpart K, Fine and Lightweight Papers from Purchased Pulp; and Subpart L, Tissue, Filter, Non-Woven and Paperboard from Purchased Pulp. Phase III is Subpart A, Dissolving Kraft, and Subpart D, Dissolving Sulfite.

---

**Table 4-7. Chemical Composition of Creosote and Associated TWFs**

| <b>Pollutant</b>       | <b>Chemical Percentage (%)</b> | <b>2006 TWF</b> | <b>Weighted 2006 TWF</b> |
|------------------------|--------------------------------|-----------------|--------------------------|
| Acenaphthene           | 11.85                          | 0.0326          | 0.00386                  |
| Anthracene             | 4.50                           | 2.55            | 0.115                    |
| Benzo(a)anthracene     | 0.21                           | 30.7            | 0.0645                   |
| Benzo(a)pyrene         | 0.05                           | 101             | 0.0503                   |
| Benzofluorenes         | 1.50                           | 0.156           | 0.00233                  |
| Biphenyl               | 1.20                           | 0.0366          | 0.000439                 |
| Carbazole              | 1.60                           | 0.709           | 0.0113                   |
| Chrysene               | 2.80                           | 31              | 0.868                    |
| Dibenzo(a,h)anthracene | 0.03                           | 30.8            | 0.00769                  |
| Dibenzofuran           | 5.75                           | 0.492           | 0.0283                   |
| Dimethylnaphthalenes   | 2.15                           |                 | 0                        |
| Fluoranthene           | 5.25                           | 1.28            | 0.0674                   |
| Fluorene               | 8.65                           | 0.701           | 0.0606                   |
| Methylantracenes       | 3.95                           |                 | 0                        |
| Methylfluorenes        | 2.65                           | 0.0487          | 0.00129                  |
| 1-Methylnaphthalene    | 6.45                           | 0.00622         | 0.000401                 |
| 2-Methylnaphthalene    | 6.60                           | 0.193           | 0.0127                   |
| Methylphenanthrenes    | 3.00                           | 0.104           | 0.00311                  |
| Naphthalene            | 9.65                           | 0.0159          | 0.00153                  |
| Phenanthrene           | 18.50                          | 0.295           | 0.0545                   |
| Pyrene                 | 4.75                           | 0.0932          | 0.00443                  |
| <b>Total</b>           |                                |                 | <b>1.36</b>              |

Source: IARC Monographs, Vol 35, *Coal Tar and Derived Products* (IARC, 1985); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

**Table 4-8. Definition of Polycyclic Aromatic Compounds**

| PAC Compound                      | CAS Number | 2006 TWF |
|-----------------------------------|------------|----------|
| Benzo(a)anthracene                | 56-55-3    | 30.7     |
| Benzo(a)phenanthrene (chrysene)   | 218-01-9   | 31       |
| Benzo(a)pyrene                    | 50-32-8    | 101      |
| Benzo(b)fluoranthene              | 205-99-2   | 30.7     |
| Benzo(j)fluoranthene              | 205-82-3   | NA       |
| Benzo(k)fluoranthene              | 207-08-9   | 30.7     |
| Benzo(j,k)fluorene (fluoranthene) | 206-44-0   | 1.28     |
| Benzo(r,s,t)pentaphene            | 189-55-9   | NA       |
| Dibenzo(a,h)acridine              | 226-36-8   | NA       |
| Dibenzo(a,j)acridine              | 224-42-0   | NA       |
| Dibenzo(a,h)anthracene            | 53-70-3    | 30.8     |
| Dibenzo(a,e)fluoranthene          | 5385-75-1  | NA       |
| Dibenzo(a,e)pyrene                | 192-65-4   | NA       |
| Dibenzo(a,h)pyrene                | 189-64-0   | NA       |
| Dibenzo(a,l)pyrene                | 191-30-0   | NA       |
| 7H-Dibenzo(e,g)carbazole          | 194-59-2   | 0.0303   |
| 7,12-Dimethylbenzo(a)anthracene   | 57-97-6    | NA       |
| Indeno(1,2,3-cd)pyrene            | 193-39-5   | 30.7     |
| 3-Methylcholanthrene              | 56-49-5    | NA       |
| 5-Methylchrysene                  | 3697-24-3  | NA       |
| 1-Nitropyrene                     | 5522-43-0  | 0.026    |

Source: *EPCRA Section 313: Guidance for Reporting Toxic Chemicals: Polycyclic Aromatic Compounds Category* (U.S. EPA, 2001); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

NA – Not applicable; EPA has not developed a TWF for this chemical.

For the analyses supporting the 2004 Final Plan, EPA made a worst-case assumption that the total mass of PACs reported was benzo(a)pyrene and assigned the TWF of benzo(a)pyrene to PACs. EPA chose this conservative approach because benzo(a)pyrene is a pollutant commonly found in wastewater from many industries, including organic chemicals, plastics, and synthetic fibers, petroleum refining, pulp and paper, nonferrous metals manufacturing, iron and steel, and other industries. By using the TWF for benzo(a)pyrene, EPA identified the upper bound of the TWPE for PACs, because the TWF for benzo(a)pyrene (100.66) is higher than any other PAC. This assumption most likely overestimates the toxicity of the discharges because PACs are likely a mixture of the compounds listed in Table 4-9, not just benzo(a)pyrene. In the subsequent development of TRI databases, EPA collected data on the PACs present, or likely to be present, in wastewater from petroleum refineries, wood preservers, and pulp and paper mills. As a result, for *TRIRelases2002* and *TRIRelases2003*, EPA calculated an industry-specific PACs TWF for petroleum refineries, wood preservers, and pulp and paper mills. For all other industries, EPA continued applying the benzo(a)pyrene TWF. In future analyses, EPA will develop additional industry-specific PAC TWFs as appropriate.

#### ***Petroleum Refining PACs (SIC Codes 2911 and 5171)***

Petroleum refining facilities report to TRI the combined mass of PACs released. In addition, EPA has information on the distribution of PACs in crude oil and petroleum products. As a result, EPA developed an industry-specific approach to estimate TWPE associated with PACs from petroleum refineries for the study of the Petroleum Refining Point Source Category supporting the 2004 Final Plan. This approach is described in detail in Section 3.4.3 of the 2005 SLA Report (U.S. EPA, 2005b) and summarized below.

EPA made the following assumptions in developing the TWF for Petroleum Refining PACs:

1. PACs will be present in wastewater in the same proportion that they are present in the crude oil and products throughput at U.S. refineries.
2. If EPA did not have literature data available for a specific PAC compound, its concentration in the crude oil or product was assumed to be zero. If a PAC compound was reported as not detected, its concentration in the crude oil or product was assumed to be zero.
3. Where PAC composition is not available, it can be estimated using the composition from similar products.

**Table 4-9. Calculation of Toxic Weighting Factor for Petroleum PACs**

| Pollutant                         | 2006 TWF | Chemical Percentage (%) | Weighted 2006 TWF |
|-----------------------------------|----------|-------------------------|-------------------|
| Benzo(a)anthracene                | 30.7     | 17.47                   | 5.36              |
| Benzo(a)phenanthrene (Chrysene)   | 31       | 46.29                   | 14.4              |
| Benzo(a)pyrene                    | 101      | 4.17                    | 4.2               |
| Benzo(b)fluoranthene              | 30.7     | 2.74                    | 0.84              |
| Benzo(j)fluoranthene              | NA       | 0.36                    |                   |
| Benzo(k)fluoranthene              | 30.7     | 0.7                     | 0.215             |
| Benzo(j,k)fluorene (Fluoranthene) | 1.28     | 24.32                   | 0.312             |
| Benzo(r,s,t)pentaphene            | NA       | 0                       | 0                 |
| Dibenz(a,h)acridine               | NA       | 0                       | 0                 |
| Dibenz(a,j)acridine               | NA       | 0                       | 0                 |
| Dibenzo(a,h)anthracene            | 30.8     | 0.43                    | 0.132             |
| Dibenzo(a,e)fluoranthene          | NA       | 0                       | 0                 |
| Dibenzo(a,e)pyrene                | NA       | 0                       | 0                 |
| Dibenzo(a,h)pyrene                | NA       | 0                       | 0                 |
| Dibenzo(a,l)pyrene                | NA       | 0                       | 0                 |
| 7H-Dibenzo(c,g)carbazole          | 0.0303   | 0                       | 0                 |
| 7,12-Dimethylbenz(a)anthracene    | NA       | 0                       | 0                 |
| Indeno(1,2,3-cd)pyrene            | 30.7     | 0.01                    | 0.00307           |
| 3-Methylcholanthrene              | NA       | 0                       | 0                 |
| 5-Methylchrysene                  | NA       | 3.5                     | 0                 |
| 1-Nitropyrene                     | 0.026    | 0                       | 0                 |
| <b>Total</b>                      |          |                         | <b>25.4</b>       |

Source: *Petroleum Supply Annual 2000* (EIA, 2001); Data compiled in the American Petroleum Institute's *Transport and Fate of non-BTEX Petroleum Chemicals in Soil and Groundwater* (API, 1994); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

NA - Not available.

4. For crude oil, representative domestic and foreign oils can be used to calculate a weighted average PAC composition for crude oil. According to the EIA (EIA, 2001), 39.1 percent (volumetric basis) of the total consumed crude oil in the United States in the year 2000 was domestic, while 60.9 percent (volumetric basis) was imported. EPA selected South Louisiana Oil as representative of domestic oil and Alberta Oil as representative of foreign oil, because they had available PAC compositions. EPA assumed that a weighted average of the composition of these two crude oils is a reasonable representation of crude oil composition for the purpose of this study. EPA also used a specific weight of 0.92 for crude oil to convert PAC concentrations reported as mg/kg to mg/L.
5. For refined products, EPA assumed a specific weight of 1.0 to simplify the calculation (i.e., no need to convert between mg/kg and mg/L).

Based on the above assumptions, EPA calculated the proportion of each of the 21 TRI PACs that would be present in refinery wastewater by multiplying each product percentage by its chemical concentration. EPA then summed all the mass of each PAC, and calculated percentages for each chemical relative to the total mass of all 21 chemicals, presented in Table 4-9. For example, EPA estimated that 17.47 percent of the total PACs released in refinery wastewater is attributable to benzo(a)anthracene. The 2006 TWF updates had little impact on the Petroleum Refining PAC TWF, decreasing it from 26.3 to 25.4.

#### ***Wood Preserving PACs (SIC Code 2491)***

After EPA identified PAC discharges from facilities in the Timber Products Processing Point Source Category as a hazard during the 2004 annual review (U.S. EPA, 2004), industry members stated that PAC discharges resulted from stormwater from creosote wood preserving facilities. Industry members stated that for TRI reporting prior to 2005, the industry estimated their PAC releases based on surrogate analytes, such as oil and grease or total organic carbon, rather than measurement of actual PACs constituents. The industry conducted a stormwater sampling program to determine the actual concentrations of PACs in stormwater from creosote wood preserving facilities.

Ten wood preserving facilities participated in a sampling program to determine the PACs released in their stormwater runoff. Over several months, the facilities collected grab samples of runoff during rainfall events, for a total of 74 samples from the 10 facilities. In 37 of these samples, at least one PAC was measured above the detection limit, with six different PACs being detected overall. Fluoranthene was detected in all 37 of these samples. EPA used the data from the 37 samples with at least one detected value to calculate a TWF for the PACs discharged from wood preserving facilities. EPA excluded data from samples where all PACs constituents were below sample detection limits, because these data do not demonstrate the composition of PACs, but rather, the relative detection limits for PACs constituents.

Using the data provided, EPA calculated the average concentration of the six PAC compounds measured. Where a pollutant was reported as nondetect, EPA assumed the concentration to be zero. For each of the six PACs, EPA calculated an average concentration using each of the measurements from the 37 samples, using zeros as the value for samples that were not detected. EPA then summed the average concentrations to estimate a total PACs concentration and calculated the percentage of each compound relative to the total PACs. EPA calculated a weighted TWF for each compound by multiplying its chemical-specific TWF by its percentage relative to the total PACs. EPA summed these values to calculate a new overall TWF value for PACs discharged in the wood preserving SIC code. Table 4-10 presents the TWFs for all PACs, the percentage of total PACs, and the weighted TWF for each PAC. The 2006 TWF updates had little impact on this wood preserving PAC TWF, decreasing it from 8.36 to 8.33.

#### ***Pulp, Paper, and Paperboard PACs (SIC Codes 2611, 2621, and 2631)***

NCASI provided guidance to the pulp, paper, and paperboard industry (NCASI, 1998) on how to estimate PAC discharges from pulp and paper mills. The NCASI guidance for PAC discharges includes a table listing the concentrations of PAC compounds found in wastewaters for several pulping types (kraft, bisulfite, CTMP, and TMP). Because the vast majority of mills in the United States are kraft mills, EPA used the kraft mill concentrations to calculate the pulp and paper PAC TWF<sup>8</sup>.

NCASI calculated the emission factors for the industry based on six PACs: benzo(a)anthracene, benzo(a)pyrene, benzo(b+k)fluoranthene, dibenzo(a,h)anthracene, fluoranthene, and indeno(1,2,3-c,d)pyrene. However, only fluoranthene was detected in kraft mill effluent. To be consistent with NCASI, and because four of the five other compounds were detected above the method detection limit for the other pulping types, EPA used one-half the detection limit for the other five compounds that were not detected in kraft mill wastewaters.

EPA used the concentrations of six PACs to calculate a pulp, paper, and paperboard PAC TWF. EPA first summed the concentrations to calculate the total concentration of PACs in the effluent and then calculated the percentage of each chemical relative to the total PACs in the effluent. After EPA calculated a weighted TWF for each compound by multiplying its chemical-specific TWF by its percentage relative to the total PACs, EPA summed these values to calculate an overall TWF value for PACs discharged in the pulp, paper, and paperboard industry. Table 4-11 presents the TWFs for the six PACs, the percentage of total PACs, and the weighted TWF for each PAC. The 2006 TWF changes had little impact on this pulp and paper PAC TWF, decreasing it from 34.2 to 33.7.

---

<sup>8</sup> The NCASI guidance does not distinguish between effluents from mills with or without bleaching. Therefore, the calculated TWF applies to all pulp, paper, and paperboard mills.

**Table 4-10. Calculation of Toxic Weighting Factor for Wood Preserving PACs**

| Chemical Name                    | 2006 TWF | Chemical Percentage (%) | Weighted 2006 TWF |
|----------------------------------|----------|-------------------------|-------------------|
| Benzo(a)anthracene               | 30.7     | 6.73                    | 2.07              |
| Benzo(a)phenanthrene(chrysene)   | 31       | 9.73                    | 3.02              |
| Benzo(a)pyrene                   | 101      | 0.49                    | 0.49              |
| Benzo(b)fluoranthene             | 30.7     | 4.98                    | 1.53              |
| Benzo(j)fluoranthene             | NA       | 0                       | 0                 |
| Benzo(k)fluoranthene             | 30.7     | 0.78                    | 0.24              |
| Benzo(j,k)fluorene(fluoranthene) | 1.28     | 77.29                   | 0.99              |
| Benzo(r,s,t)pentaphene           | NA       | 0                       | 0                 |
| Dibenz(a,h)acridine              | NA       | 0                       | 0                 |
| Dibenz(a,j)acridine              | NA       | 0                       | 0                 |
| Dibenzo(a,h)anthracene           | 30.8     | 0                       | 0                 |
| Dibenzo(a,e)fluoranthene         | NA       | 0                       | 0                 |
| Dibenzo(a,e)pyrene               | NA       | 0                       | 0                 |
| Dibenzo(a,h)pyrene               | NA       | 0                       | 0                 |
| Dibenzo(a,l)pyrene               | NA       | 0                       | 0                 |
| 7H-Dibenzo(e,g)carbazole         | 0.0303   | 0                       | 0                 |
| 7,12-Dimethylbez(a)anthracene    | NA       | 0                       | 0                 |
| Indeno(a,2,3-cd)pyrene           | 30.7     | 0                       | 0                 |
| 3-Methylcholanthrene             | NA       | 0                       | 0                 |
| 5-Methylchrysene                 | NA       | 0                       | 0                 |
| 1-Nitropyrene                    | 0.026    | 0                       | 0                 |
| <b>Total PACs TWF</b>            |          |                         | <b>8.33</b>       |

Source: *Creosote Wood Treating Industry Storm Water Runoff Study Conducted on Behalf of the Southern Pressure Treaters Association and Creosote Council III* (Rollins, 2005); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

NA - Not available.

**Table 4-11. Calculation of Toxic Weighting Factor for Pulp, Paper, and Paperboard PACs**

| Chemical Name                    | 2006 TWF | Chemical Percentage (%) | Weighted 2006 TWF |
|----------------------------------|----------|-------------------------|-------------------|
| Benzo(a)anthracene               | 30.7     | 11.74                   | 3.60              |
| Benzo(a)pyrene                   | 101      | 11.74                   | 11.8              |
| Benzo(b+k)fluoranthene           | 30.66    | 11.74                   | 3.6               |
| Benzo(j,k)fluorene(fluoranthene) | 1.28     | 17.84                   | 0.23              |
| Dibenzo(a,h)anthracene           | 30.8     | 23.47                   | 7.22              |
| Indeno(1,2,3-cd)pyrene           | 30.7     | 23.47                   | 7.20              |
| <b>Total PACs TWF</b>            |          |                         | <b>33.7</b>       |

Source: *Handbook of Chemical-Specific Information for SARA Section 313 Form R Reporting* (NCASI, 1998); *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process* (U.S. EPA, 2006a).

### 4.3.2 Database Corrections

During the review of the TRI data quality, EPA identified inaccuracies in the data reported to TRI, such as facilities reporting the wrong SIC code or facilities reporting discharges of chemicals that they did not detect in wastewater. As these inaccuracies were identified, EPA corrected the data to more accurately reflect the discharges from facilities and their respective industrial categories. EPA made several corrections to the TRI data during the 2005 annual review; these corrections are detailed in Table 3-A of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005b). After the publication of the 2006 Preliminary Plan and during the 2006 annual review, EPA made additional corrections to the TRI data. Appendices E and F list the changes made to the *TRIRelases2002* and *TRIRelases2003* databases, respectively, as part of the 2006 screening-level review.

## 4.4 Corrections Affecting Only the PCSLoads Databases

For the 2006 annual review, EPA updated the *PCSLoads2002\_v2* database. The *2005 Annual Screening-Level Analysis Report* provides details on the methodology for developing the *PCSLoads2002* database (U.S. EPA, 2005b). This subsection describes the changes made to the *PCSLoads2002* database after publication of the 2006 Preliminary Plan.

### 4.4.1 Database Corrections

During the review of the PCS data quality, EPA identified inaccuracies in some of the PCS data, such as facilities reporting the wrong SIC code and errors in the loadings estimations for pollutant discharges. As these inaccuracies were identified, EPA corrected the data to more accurately reflect the discharges from facilities and their respective industrial categories. EPA made several corrections to the PCS data during the 2005 annual review; these corrections are detailed in Table 2-B of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005b). After the publication of the 2006 Preliminary Plan, EPA made additional corrections to the PCS data. Appendix G presents the changes made to the *PCSLoads2002* database since the publication of the 2006 Preliminary Plan.

#### **4.4.2 Corrections Made to Steam Electric Power Generating Facilities PCS Discharges**

During the Steam Electric Power Generating Point Source Category detailed study, EPA identified several data quality issues regarding the development of the *PCSLoads2002* database. These include concentration unit issues, data entry errors, internal monitoring point double-counting issues, and intake pollutant and intermittent discharge quantification concerns.

During the review of the steam electric PCS data quality, EPA identified the facilities with the largest discharges in terms of TWPE and contacted the facilities to verify the discharges. EPA also received comments on the 2006 Preliminary Plan identifying facility-specific corrections. EPA reports its findings in the memorandum entitled Changes Made to the *PCSLoads2002* Database Based on Facility-Specific Comments, dated October 17, 2006 (Finseth, 2006). As a result of the contacts and comments, EPA made the following types of changes to the steam electric PCS data:

- Corrected data-entry errors;
- Corrected concentration unit issues;
- Adjusted loads for facilities discharging intermittently;
- Adjusted loads to account for intake pollutants; and
- Adjusted loads to account for internal monitoring points.

#### **4.5 TRI 2002 and 2003 Rankings and PCS 2002 Rankings**

After incorporating the changes discussed in Sections 4.2, 4.3, and 4.4, EPA generated the final versions of the TRI and PCS databases used for the 2006 screening-level review: *TRIRelases2002\_v4*, *PCSLoads2002\_v4*, and *TRIRelases2003\_v2*. The rankings represent the results of the three databases and are presented in Section 4.5.1. Section 4.5.2 presents the data quality review issues identified for each database.

##### **4.5.1 Results of the *TRIRelases2002*, *TRIRelases2003*, and *PCSLoads2002* Databases**

Tables 4-12 through 4-14 present the category rankings by TWPE from the *TRIRelases2002\_v4*, *PCSLoads2002\_v4*, and *TRIRelases2003\_v2* databases, respectively. The category rankings presented in these tables reflect all the corrections made during the 2006 screening-level review. Appendices H through J present the four-digit SIC code rankings by TWPE from the *TRIRelases2002\_v4*, *PCSLoads2002\_v4*, and *TRIRelases2003\_v2* databases, respectively. Appendices K through M present the chemical rankings by TWPE from the *TRIRelases2002\_v4*, *PCSLoads2002\_v4*, and *TRIRelases2003\_v2* databases, respectively.

Table 4-12. *TRIRelases2002\_v4* Category Rankings from the 2006 Screening-Level Review

| 40 CFR Part        | Category   | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE      |
|--------------------|--|------------------------------|--------------------------------|--|---|--------------------------------------|-----------|
| 414.1 <sup>b</sup> | Chlorine and Chlorinated Hydrocarbons            | 33                           | 9                              | 2  | 63  | 1,290,000                            | 9,040,000 |
| 430                | Pulp, Paper and Paperboard                       | 199                          | 85                             | 11   | 509   | 20,300,000                           | 1,980,000 |
| 467                | Aluminum Forming                                 | 50                           | 102                            | 49   | 448   | 1,170,000                            | 940,000   |
| 423                | Steam Electric Power Generation                  | 340                          | 15                             | 21   | 693   | 3,060,000                            | 833,000   |
| 455                | Pesticide Chemicals Manufacturing                | 31                           | 28                             | 7  | 124   | 1,760,000                            | 555,000   |
| 433                | Metal Finishing                                  | 294                          | 1,795                          | 318  | 7,438   | 6,450,000                            | 499,000   |
| 419                | Petroleum Refining                               | 250                          | 66                             | 36   | 928   | 18,400,000                           | 467,000   |
| 414                | Organic Chemicals, Plastics and Synthetic Fibers | 238                          | 489                            | 65   | 2,188   | 54,000,000                           | 349,000   |
| 445/444            | Landfills/Waste Combustors                       | 13                           | 26                             | 8  | 113   | 654,000                              | 222,000   |
| 415                | Inorganic Chemicals                              | 69                           | 88                             | 38   | 483   | 9,070,000                            | 186,000   |
| 420                | Iron and Steel Manufacturing                     | 116                          | 69                             | 52   | 375   | 39,600,000                           | 167,000   |
| 463                | Plastic Molding and Forming                      | 26                           | 104                            | 22   | 1,459   | 1,380,000                            | 113,000   |
| 440                | Ore Mining and Dressing                          | 31                           | 4                              | -  | 81  | 462,000                              | 70,200    |
| 432                | Meat and Poultry Products                        | 87                           | 72                             | 16   | 307   | 61,900,000                           | 62,400    |
| 421                | Nonferrous Metals Manufacturing                  | 66                           | 30                             | 19   | 240   | 2,400,000                            | 51,800    |
| 429                | Timber Products Processing                       | 80                           | 41                             | 25   | 1,012   | 65,000                               | 48,000    |
| 437                | Centralized Waste Treaters                       | 2                            | -                              | -  | 1   | 156,000                              | 38,100    |
| 464                | Metal Molding and Casting (Foundries)            | 96                           | 83                             | 36   | 629   | 194,000                              | 16,000    |
| 454                | Gum and Wood Chemicals                           | 7                            | 4                              | 1  | 26  | 25,300                               | 13,000    |
| 439                | Pharmaceutical Manufacturing                     | 15                           | 111                            | 10   | 234   | 2,440,000                            | 11,100    |
| 471                | Nonferrous Metals Forming and Metal Powders      | 58                           | 107                            | 59   | 524   | 1,260,000                            | 10,800    |
| 424                | Ferroalloy Manufacturing                         | 5                            | 2                              | 1  | 15  | 248,000                              | 9,910     |
| 425                | Leather Tanning and Finishing                    | 1                            | 22                             | 4  | 36  | 497,000                              | 9,880     |
| 407                | Fruits and Vegetable Processing                  | 9                            | 17                             | 2  | 104   | 7,950,000                            | 9,450     |

Table 4-12 (Continued)

| 40 CFR Part | Category                             | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE  |
|-------------|--------------------------------------|------------------------------|--------------------------------|--|---|--------------------------------------|-------|
| 418         | Fertilizer Manufacturing             | 42                           | 4                              | 3  | 121   | 4,980,000                            | 9,060 |
| 413         | Electroplating                       | 21                           | 414                            | 35   | 643   | 2,130,000                            | 7,660 |
| NA          | Tobacco Products                     | 2                            | 15                             | 3  | 32  | 594,000                              | 7,120 |
| NA          | Miscellaneous Foods and Beverages    | 14                           | 130                            | 10   | 363   | 5,390,000                            | 6,860 |
| 469         | Electrical and Electronic Components | 5                            | 91                             | 10   | 188   | 3,430,000                            | 6,340 |
| 468         | Copper Forming                       | 38                           | 59                             | 50   | 265   | 293,000                              | 6,060 |
| 428         | Rubber Manufacturing                 | 33                           | 126                            | 60   | 526   | 771,000                              | 5,100 |
| 406         | Grain Mills Manufacturing            | 6                            | 12                             | 6  | 123   | 2,550,000                            | 4,660 |
| 410         | Textile Mills                        | 16                           | 68                             | 8  | 300   | 244,000                              | 3,710 |
| 461         | Battery Manufacturing                | 4                            | 31                             | 32   | 83  | 58,100                               | 3,150 |
| 434         | Coal Mining                          | 27                           | -                              | -  | 82  | 155,000                              | 3,120 |
| 436         | Mineral Mining and Processing        | 42                           | 42                             | 9  | 463   | 1,860,000                            | 2,840 |
| 405         | Dairy Products Processing            | 31                           | 213                            | 3  | 368   | 3,580,000                            | 2,830 |
| 426         | Glass Manufacturing                  | 18                           | 47                             | 15   | 260   | 249,000                              | 2,540 |
| 457         | Explosives                           | 10                           | 2                              | 2  | 40  | 2,980,000                            | 2,280 |
| 411         | Cement Manufacturing                 | 25                           | 4                              | 1  | 339   | 3,190                                | 2,030 |
| 417         | Soaps and Detergents Manufacturing   | 3                            | 83                             | 5  | 209   | 125,000                              | 1,750 |
| 435         | Oil & Gas Extraction                 | -                            | -                              | 1  | 1   | 210,000                              | 700   |
| 458         | Carbon Black Manufacturing           | 8                            | -                              | -  | 20  | 11                                   | 514   |
| 446         | Paint Formulating                    | 10                           | 57                             | 7  | 499   | 82,900                               | 503   |
| 466         | Porcelain Enameling                  | 2                            | 7                              | 3  | 13  | 286,000                              | 398   |
| 409         | Sugar Processing                     | 17                           | 1                              | -  | 33  | 497,000                              | 394   |
| 460         | Hospital                             | 1                            | -                              | -  | 3   | 750                                  | 382   |
| 422         | Phosphate Manufacturing              | 14                           | 1                              | -  | 32  | 82,700                               | 300   |
| 438         | Metal Products and Machinery         | 37                           | -                              | -  | -   | 13,600                               | 213   |

Table 4-12 (Continued)

| 40 CFR Part | Category  | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE |
|-------------|---|------------------------------|--------------------------------|--|---|--------------------------------------|------|
| NA          | Printing & Publishing                           | 2                            | 56                             | 1  | 201   | 16,700                               | 209  |
| NA          | Independent and Stand Alone Labs                | 2                            | 1                              | -  | 6   | 71,100                               | 177  |
| 408         | Canned and Preserved Seafood                    | 6                            | -                              | -  | 18  | 176,000                              | 138  |
| NA          | Drinking Water Treatment                        | 1                            | 1                              | 1  | 3   | 274                                  | 128  |
| 443         | Paving and Roofing Materials (Tars and Asphalt) | 3                            | 8                              | 1  | 256   | 1,350                                | 104  |
| 447         | Ink Formulating                                 | 1                            | 9                              | -  | 89  | 21,600                               | 94   |
| 465         | Coil Coating                                    | 1                            | 51                             | -  | 129   | 4,050                                | 39   |
| 427         | Asbestos Manufacturing                          | -                            | -                              | 1  | 1   | 539                                  | 5.8  |

Source: *TRIRelases2002\_v4*.

<sup>a</sup>Accounts for estimated POTW removals for indirect discharges.

<sup>b</sup>414.1 refers to the chlorinated hydrocarbon segment of 414 and the chlor-alkali segment of 415.

NA – Not applicable; no existing ELGs apply to discharges.

Table 4-13. PCSLoads2002\_v4 Category Rankings from the 2006 Screening-Level Review

| 40 CFR Part        | Category   | Major Dischargers | Minor Dischargers | Total Pounds   | TWPE      |
|--------------------|--|-------------------|-------------------|----------------|-----------|
| 454                | Gum and Wood Chemicals                           | 4                 | 5                 | 3,170,000      | 3,800,000 |
| 420                | Iron and Steel Manufacturing                     | 105               | 66                | 2,200,000,000  | 1,960,000 |
| 430                | Pulp, Paper and Paperboard                       | 349               | 58                | 4,330,000,000  | 1,540,000 |
| 418                | Fertilizer Manufacturing                         | 31                | 22                | 624,000,000    | 1,370,000 |
| 423                | Steam Electric Power Generation                  | 557               | 345               | 19,500,000,000 | 982,000   |
| 433                | Metal Finishing                                  | 130               | 707               | 105,000,000    | 511,000   |
| 414.1 <sup>a</sup> | Chlorine and Chlorinated Hydrocarbons            | 45                | 8                 | 1,990,000,000  | 434,000   |
| 440                | Ore Mining and Dressing                          | 74                | 37                | 702,000,000    | 410,000   |
| 414                | Organic Chemicals, Plastics and Synthetic Fibers | 238               | 225               | 978,000,000    | 398,000   |
| 421                | Nonferrous Metals Manufacturing                  | 58                | 25                | 118,000,000    | 397,000   |
| NA                 | Miscellaneous Foods and Beverages                | 13                | 110               | 162,000,000    | 337,000   |
| 419                | Petroleum Refining                               | 122               | 538               | 7,610,000,000  | 165,000   |
| 410                | Textile Mills                                    | 99                | 46                | 77,500,000     | 123,000   |
| 415                | Inorganic Chemicals                              | 68                | 127               | 1,240,000,000  | 107,000   |
| NA                 | Drinking Water Treatment                         | 19                | 961               | 59,900,000     | 89,000    |
| 467                | Aluminum Forming                                 | 15                | 25                | 13,500,000     | 61,500    |
| 445/444            | Landfills/Waste Combustors                       | 19                | 242               | 76,300,000     | 58,700    |
| 432                | Meat and Poultry Products                        | 47                | 133               | 76,800,000     | 52,200    |
| 436                | Mineral Mining and Processing                    | 39                | 531               | 999,000,000    | 50,500    |
| 455                | Pesticide Chemicals Manufacturing                | 242               | 23                | 122,000,000    | 50,300    |
| 439                | Pharmaceutical Manufacturing                     | 34                | 43                | 114,000,000    | 48,600    |
| 422                | Phosphate Manufacturing                          | 12                | 9                 | 87,700,000     | 44,300    |
| 463                | Plastic Molding and Forming                      | 9                 | 116               | 28,000,000     | 20,700    |
| 413                | Electroplating                                   | 30                | 40                | 5,250,000      | 19,100    |
| 409                | Sugar Processing                                 | 24                | 7                 | 110,000,000    | 17,100    |
| 464                | Metal Molding and Casting (Foundries)            | 7                 | 52                | 732,000        | 9,880     |

Table 4-13 (Continued)

| 40 CFR Part | Category  | Major Dischargers | Minor Dischargers | Total Pounds | TWPE  |
|-------------|---|-------------------|-------------------|--------------|-------|
| 457         | Explosives                                      | 6                 | 9                 | 31,700,000   | 8,750 |
| 424         | Ferroalloy Manufacturing                        | 3                 | 4                 | 9,570,000    | 7,130 |
| 465         | Coil Coating                                    | 1                 | 6                 | 6,340,000    | 6,390 |
| 471         | Nonferrous Metals Forming and Metal Powders     | 16                | 28                | 2,560,000    | 5,750 |
| 469         | Electrical and Electronic Components            | 6                 | 10                | 7,770,000    | 5,130 |
| 407         | Fruits and Vegetable Processing                 | 14                | 59                | 10,900,000   | 4,350 |
| 468         | Copper Forming                                  | 9                 | 17                | 2,110,000    | 3,550 |
| 437         | Centralized Waste Treaters                      | 6                 | 0                 | 81,200,000   | 3,420 |
| 425         | Leather Tanning and Finishing                   | 7                 | 1                 | 736,000      | 3,260 |
| 428         | Rubber Manufacturing                            | 20                | 97                | 9,530,000    | 2,350 |
| 411         | Cement Manufacturing                            | 7                 | 105               | 39,800,000   | 2,190 |
| 434         | Coal Mining                                     | 14                | 94                | 24,000,000   | 1,910 |
| NA          | Printing & Publishing                           | 3                 | 15                | 3,800,000    | 1,680 |
| 426         | Glass Manufacturing                             | 5                 | 48                | 623,000      | 1,410 |
| NA          | Airport Deicing                                 | 3                 | 38                | 1,110,000    | 1,160 |
| 429         | Timber Products Processing                      | 8                 | 141               | 11,700,000   | 1,100 |
| 406         | Grain Mills Manufacturing                       | 15                | 22                | 19,200,000   | 964   |
| 408         | Canned And Preserved Seafood                    | 7                 | 68                | 286,000,000  | 867   |
| 438         | Metal Products and Machinery                    | 23                | 86                | 1,620,000    | 728   |
| NA          | Independent and Stand Alone Labs                | 7                 | 32                | 1,640,000    | 610   |
| 443         | Paving and Roofing Materials (Tars and Asphalt) | 4                 | 64                | 287,000      | 487   |
| 451         | Aquatic Animal Production Industry              | 5                 | 109               | 4,330,000    | 475   |
| 417         | Soaps and Detergents Manufacturing              | 5                 | 10                | 434,000      | 270   |
| NA          | Construction and Development                    | 1                 | 7                 | 57,100       | 188   |
| 461         | Battery Manufacturing                           | 1                 | 5                 | 16,800       | 88    |
| 405         | Dairy Products Processing                       | 4                 | 72                | 439,000      | 43    |
| 466         | Porcelain Enameling                             | 2                 | 1                 | 22,900       | 17    |

Table 4-13 (Continued)

| 40 CFR Part | Category                               | Major Dischargers | Minor Dischargers | Total Pounds | TWPE |
|-------------|--|-------------------|-------------------|--------------|------|
| 460         | Hospital                               | 2                 | 110               | 9,760        | 5    |
| NA          | Tobacco Products                       | 1                 | 2                 | 129,000      | 2    |
| 435         | Oil & Gas Extraction                   | 2                 | 91                | 1,440,000    | 1    |
| 412         | Concentrated Animal Feeding Operations | 1                 | 72                | 229,000      | -    |
| 459         | Photographic                           | 2                 | 0                 | -            | -    |
| NA          | Photo Processing                       | 2                 | 0                 | -            | -    |

Source: PCSLoads2002\_v4.

<sup>a</sup>414.1 refers to the chlorinated hydrocarbon segment of 414 and the chlor-alkali segment of 415.

NA – Not applicable; no existing ELGs apply to discharges.

Table 4-14. *TRIRelases2003\_v2* Category Rankings from the 2006 Screening-Level Review

| 40 CFR Part        | Category   | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE      |
|--------------------|--|------------------------------|--------------------------------|--|---|--------------------------------------|-----------|
| 414.1 <sup>b</sup> | Chlorine and Chlorinated Hydrocarbons            | 33                           | 9                              | 1  | 62  | 933,000                              | 6,970,000 |
| 430                | Pulp, Paper and Paperboard                       | 191                          | 82                             | 10   | 491   | 21,100,000                           | 2,880,000 |
| 423                | Steam Electric Power Generation                  | 353                          | 17                             | 19   | 709   | 3,350,000                            | 1,060,000 |
| 414                | Organic Chemicals, Plastics and Synthetic Fibers | 230                          | 471                            | 62   | 2,109   | 37,900,000                           | 1,020,000 |
| 419                | Petroleum Refining                               | 252                          | 58                             | 33   | 871   | 17,300,000                           | 498,000   |
| 433                | Metal Finishing                                  | 249                          | 1,697                          | 325  | 7,222   | 7,010,000                            | 496,000   |
| 455                | Pesticide Chemicals Manufacturing                | 29                           | 29                             | 4  | 113   | 1,930,000                            | 485,000   |
| 429                | Timber Products Processing                       | 76                           | 34                             | 26   | 987   | 40,000                               | 249,000   |
| 415                | Inorganic Chemicals                              | 75                           | 90                             | 36   | 465   | 8,830,000                            | 182,000   |
| 420                | Iron and Steel Manufacturing                     | 117                          | 68                             | 50   | 366   | 35,800,000                           | 155,000   |
| 445/444            | Landfills/Waste Combustors                       | 17                           | 27                             | 5  | 112   | 589,000                              | 132,000   |
| 463                | Plastic Molding and Forming                      | 33                           | 105                            | 20   | 1,459   | 1,490,000                            | 107,000   |
| 421                | Nonferrous Metals Manufacturing                  | 60                           | 32                             | 15   | 221   | 2,760,000                            | 78,400    |
| 440                | Ore Mining and Dressing                          | 30                           | 2                              | -  | 81  | 597,000                              | 77,600    |
| 437                | Centralized Waste Treaters                       | 2                            | -                              | -  | 1   | 327,000                              | 65,300    |
| 432                | Meat and Poultry Products                        | 90                           | 75                             | 17   | 297   | 68,700,000                           | 55,700    |
| 424                | Ferrous Alloy Manufacturing                      | 3                            | 2                              | 1  | 15  | 438,000                              | 24,500    |
| 464                | Metal Molding and Casting (Foundries)            | 89                           | 84                             | 36   | 615   | 220,000                              | 12,800    |
| 439                | Pharmaceutical Manufacturing                     | 15                           | 101                            | 8  | 220   | 2,110,000                            | 12,100    |
| 471                | Nonferrous Metals Forming and Metal Powders      | 60                           | 98                             | 53   | 500   | 1,280,000                            | 10,600    |
| 418                | Fertilizer Manufacturing                         | 42                           | 4                              | 3  | 112   | 5,280,000                            | 10,300    |
| 411                | Cement Manufacturing                             | 41                           | 8                              | 2  | 441   | 4,590                                | 10,200    |
| 425                | Leather Tanning and Finishing                    | 3                            | 22                             | 1  | 33  | 368,000                              | 9,250     |
| 454                | Gum and Wood Chemicals                           | 7                            | 4                              | 1  | 24  | 23,700                               | 7,280     |

Table 4-14 (Continued)

| 40 CFR Part | Category  | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE  |
|-------------|---|------------------------------|--------------------------------|--|---|--------------------------------------|-------|
| 407         | Fruits and Vegetable Processing                 | 10                           | 15                             | 1  | 105   | 7,320,000                            | 7,170 |
| 468         | Copper Forming                                  | 34                           | 56                             | 43   | 249   | 172,000                              | 6,720 |
| 469         | Electrical and Electronic Components            | 5                            | 78                             | 10   | 175   | 3,780,000                            | 6,630 |
| NA          | Tobacco Products                                | 1                            | 15                             | 5  | 33  | 443,000                              | 6,520 |
| 413         | Electroplating                                  | 21                           | 399                            | 37   | 631   | 1,620,000                            | 5,970 |
| NA          | Miscellaneous Foods and Beverages               | 15                           | 133                            | 10   | 330   | 5,560,000                            | 5,440 |
| 426         | Glass Manufacturing                             | 14                           | 46                             | 18   | 251   | 253,000                              | 4,650 |
| 461         | Battery Manufacturing                           | 3                            | 32                             | 31   | 85  | 38,500                               | 4,510 |
| 428         | Rubber Manufacturing                            | 30                           | 114                            | 59   | 504   | 727,000                              | 4,400 |
| 417         | Soaps and Detergents Manufacturing              | 3                            | 82                             | 3  | 203   | 109,000                              | 4,000 |
| 406         | Grain Mills Manufacturing                       | 7                            | 12                             | 7  | 123   | 1,810,000                            | 3,800 |
| 405         | Dairy Products Processing                       | 33                           | 211                            | 4  | 365   | 4,640,000                            | 3,620 |
| 467         | Aluminum Forming                                | 49                           | 92                             | 44   | 433   | 958,000                              | 3,520 |
| 410         | Textile Mills                                   | 15                           | 68                             | 9  | 305   | 451,000                              | 3,450 |
| 436         | Mineral Mining and Processing                   | 45                           | 40                             | 7  | 471   | 2,180,000                            | 2,890 |
| 434         | Coal Mining                                     | 23                           | -                              | -  | 87  | 200,000                              | 2,400 |
| NA          | Drinking Water Treatment                        | 1                            | -                              | 3  | 5   | 9,280                                | 823   |
| 443         | Paving and Roofing Materials (Tars and Asphalt) | 7                            | 8                              | 2  | 264   | 737                                  | 518   |
| 446         | Paint Formulating                               | 9                            | 52                             | 8  | 482   | 88,600                               | 514   |
| 458         | Carbon Black Manufacturing                      | 8                            | -                              | -  | 19  | 11                                   | 483   |
| 422         | Phosphate Manufacturing                         | 12                           | 1                              | -  | 26  | 65,700                               | 480   |
| 435         | Oil & Gas Extraction                            | -                            | -                              | 1  | 2   | 26,400                               | 457   |
| 466         | Porcelain Enameling                             | 2                            | 6                              | 4  | 15  | 70,700                               | 363   |
| 409         | Sugar Processing                                | 16                           | 1                              | -  | 33  | 339,000                              | 309   |
| NA          | Printing & Publishing                           | 2                            | 53                             | 1  | 183   | 15,400                               | 297   |
| 438         | Metal Products and Machinery                    | 29                           | -                              | -  | -   | 13,900                               | 231   |

Table 4-14 (Continued)

| 40 CFR Part | Category                         | Number of Direct Dischargers | Number of Indirect Dischargers | Number of Facilities that Discharge Both Directly and Indirectly | Number of Facilities Reporting Releases to Any Medium | Total Pounds Discharged <sup>a</sup> | TWPE |
|-------------|----------------------------------|------------------------------|--------------------------------|--|---|--------------------------------------|------|
| NA          | Independent and Stand Alone Labs | 2                            | 1                              | -  | 4   | 80,100                               | 202  |
| 408         | Canned and Preserved Seafood     | 8                            | -                              | -  | 22  | 237,000                              | 179  |
| 457         | Explosives                       | 8                            | 3                              | 2  | 42  | 27,400                               | 47   |
| 465         | Coil Coating                     | 2                            | 47                             | -  | 126   | 608                                  | 45   |
| 447         | Ink Formulating                  | 1                            | 8                              | 1  | 89  | 5,490                                | 45   |
| 427         | Asbestos Manufacturing           | -                            | -                              | 1  | 1   | 676                                  | 5.2  |

Source: *TRIRelases2003\_v2*.

<sup>a</sup>Accounts for estimated POTW removals for indirect discharges.

<sup>b</sup>414.1 refers to the chlorinated hydrocarbon segment of 414 and the chlor-alkali segment of 415.

NA – Not applicable; no existing ELGs apply to discharges.

## **4.5.2 Data Quality Review of the *TRIReleases2002*, *TRIReleases2003*, and *PCSLoads2002* Databases**

EPA's screening-level review involves the collection and use of existing environmental data for purposes other than those for which they were originally collected. This subsection describes some of the data quality issues identified during the 2006 screening-level review. Section 4.5.2.1 discusses quality issues identified for the TRI databases and Section 4.5.2.2 discusses quality issues identified for the PCS database.

### **4.5.2.1 TRI Data Quality Review**

The primary purpose of the TRI is to collect annual data on storage, releases, and transfers of certain toxic chemicals from industrial facilities and make the data public to inform communities and citizens of chemical hazards in their areas. EPA's screening-level review uses the TRI data to estimate the mass of pollutants discharged by industrial categories and prioritize the categories for further review. Because this is not the intended purpose of the TRI, EPA reviewed the quality of the TRI data to verify the accuracy of reported discharges, especially those contributing the highest TWPE.

EPA reviewed the TRI 2002 data quality during the 2005 annual review, which is discussed in Section 6.3 of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005b). During the 2006 annual review, EPA continued to review the TRI 2002 data quality and make corrections to the database (as described in Section 4.3). The remainder of this subsection describes the TRI 2003 data quality review and the pulp, paper, and paperboard data issues identified during the 2006 annual review.

#### ***TRI 2003 Quality Review***

To review TRI 2003 data, EPA ranked TRI facilities by total TWPE released to surface waters to identify potential anomalous loads. For this analysis, EPA excluded facilities that manufacture chlorine and certain chlorinated hydrocarbons, because EPA will evaluate reported discharges from these facilities as part of the development of the Chlorine and Chlorinated Hydrocarbons (CCH) rulemaking. After removing these facilities, EPA identified seven facilities with unusually high chemical releases for their point source category. To verify the wastewater releases, EPA contacted the seven facilities and asked if the TRI data accurately reflected what they had reported. EPA also asked whether the reported release was based on sampling data and whether the pollutant was detected. Table 4-15 presents EPA's TRI facility review and any corrections made to the *TRIReleases2003* database.

Table 4-15. TRI Facility Review

| Facility Name                         | Facility Location  | Point Source Category       | Chemical(s) in Question   | Facility's Response  | Load Recommendations  |
|---------------------------------------|--------------------|-----------------------------|---|--|---|
| ONYX Environmental Services LLC       | Port Arthur, TX    | Landfills/Waste Combustors  | Toxaphene, Chlordane, Heptachlor, Benzidine, and Hexachlorobenzene            | The facility analyzed its wastewater, but none of the chemicals were ever detected. The discharges were based on ½ the detection limit.  | Change the toxaphene, chlordane, heptachlor, benzidine, and hexachlorobenzene releases to 0.0.                                    |
| Domtar Industries Inc Ashdown Mill    | Ashdown, AR        | Pulp, Paper, and Paperboard | Dioxin and Dioxin-like Compounds  | The facility analyzed its bleach plant monitoring location for dioxins in 2003. The measured concentrations were used to calculate the reported discharge.   | Do not change the dioxin and dioxin-like compounds discharge; however, change the facility reported dioxin congener distribution. |
| Cemex Inc Dixon Cement Plant          | Dixon, IL          | Cement Manufacturing        | Dioxin and Dioxin-like Compounds  | The facility accidentally reported its dioxin and dioxin-like compounds air releases as water discharges.  | Change the dioxin and dioxin-like compounds discharge to 0.0.   |
| Vonroll America                       | East Liverpool, OH | Landfills/Waste Combustors  | Benzidine   | EPA contacted this facility about their 2002 discharges, which are the same as the 2003 discharges. The facility reports its benzidine release as range code 'B' (11-499). The actual value the facility calculated was 16.68 lbs. However, benzidine was never detected and the value is based on the detection limit.  | Change the benzidine discharge to 0.0.  |
| LNVA – North Regional Treatment Plant | Beaumont, TX       | Centralized Waste Treaters  | Polycyclic Aromatic Compounds   | The facility has analyzed the effluent from the treatment plant for each of the PACs and none have ever been detected. The discharge is based on ½ the detection limit.  | Change the polycyclic aromatic compounds discharge to 0.0.  |
| Tower Automotive Products Co Inc.     | Corydon, IN        | Metal Finishing             | Sodium Nitrite  | The facility uses an additive that contains 40 to 50% sodium nitrite in its wastewater treatment process. The discharge is based on the amount of additive used during the year.   | Do not change the sodium nitrite discharges from the facility.  |
| Colfax Treating Co. LLC               | Pineville, LA      | Timber Products Processing  | Dioxin and Dioxin-like Compounds, Polycyclic Aromatic Compounds, and Creosote | The facility estimates the dioxin and dioxin-like compounds discharge based on the pentachlorophenol concentrate that is discharged, which contains 981 ppm of dioxin and dioxin-like compounds.<br><br>The creosote discharge is estimated as 1% of the total oil and grease discharge from the facility.<br><br>The PACs discharge is estimated as 2.28% of the creosote discharge or 0.0228% of the total oil and grease discharge from the facility. | Do not change the discharge loads of dioxin and dioxin-like compounds, creosote, and PACs.  |

Source: Telephone conversation with Mona Rountree of ONYX Environmental Services LLC., Port Arthur, TX and TJ Finseth of Eastern Research Group, Inc. (Rountree, 2005); Telephone conversation with William Bertrand of Domtar, Ashdown, AR, and Bryan Lange of Eastern Research Group, Inc. (Bertrand, 2005); Telephone conversation with Lillian Deprimo of Cemex Inc., Dixon, IL, and Jessica Wolford of Eastern Research Group, Inc. (Deprimo, 2005); Telephone conversation with Becky Dalrymple of Vonroll VTI, East Liverpool, OH, and TJ Finseth of Eastern Research Group, Inc. (Dalrymple, 2005); Telephone conversation with Jesse Eastep of LNVA North Regional Treatment Plant, Beaumont, TX, and Jessica Wolford of Eastern Research Group, Inc. (Eastep, 2005); Telephone conversation with Roland Berg of Tower Automotive Products Co Inc., Corydon, IN, and Jessica Wolford of Eastern Research Group, Inc. (Berg, 2005); Telephone conversation with Karen Brignac of PPM Consulting and TJ Finseth of Eastern Research Group, Inc. (Brignac, 2005).

### ***Pulp, Paper, and Paperboard Data Issues***

During the Pulp, Paper, and Paperboard Point Source Category detailed study, EPA determined that the dioxin and dioxin-like compounds discharges reported to TRI did not reflect the actual quantity discharged. EPA determined that the majority of the estimated releases of dioxin and dioxin-like compounds reported to TRI were based on pollutant concentrations below the Method 1613B minimum levels (MLs), including the congener-specific measurement data that NCASI used to develop an emission factor for wastewater discharges. For more information about this issue, see chapter 5 of the *Final Report: Pulp, Paper, and Paperboard Detailed Study* (U.S. EPA, 2006b).

#### **4.5.2.2 PCS Data Quality Review**

PCS was designed to automate entry, updating, and retrieval of NPDES data and track permit issuance, permit limits and monitoring data, and other data pertaining to facilities regulated under NPDES. EPA's screening-level review uses PCS data to estimate the mass of pollutants discharged by industrial categories and prioritize the categories for further review. Because this is not the intended purpose of PCS data, EPA reviewed the quality of the PCS data to verify the accuracy of reported discharges, especially for those contributing the highest TWPE.

EPA reviewed the PCS 2002 data quality during the 2005 annual review, which is discussed in Section 6.2 of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005b). During the 2006 annual review, EPA continued to review the PCS 2002 data quality and make corrections to the database (as described in Section 4.4). The remainder of this section describes the use of maximum values for load calculation and nutrient analysis data issues identified during the 2006 annual review.

#### ***Use of Maximum Values to Estimate PCS Loads***

To create *PCSLoads2002*, EPA used the EDS system to calculate the annual pollutant loads using the PCS data. For a detailed discussion of how EPA calculates annual loads from the PCS data, see Section 2 of the *2005 Annual Screening-Level Analysis Report* (U.S. EPA, 2005b). EDS calculates pollutant loads using the following five measurement fields that facilities can report in their discharge monitoring data:

- 1) Average Quantity;
- 2) Maximum Quantity;
- 3) Average Concentration;
- 4) Maximum Concentration; and
- 5) Minimum Concentration.

EPA received comments regarding the use of maximum values in calculating annual loads. Commenters stated that maximum values overestimate discharges and should be adjusted accordingly. In generating *PCSLoads2002*, the EDS system used only maximum values when these represent the maximum of a set of average concentration data (i.e., it is the maximum value of the weekly average concentrations) or the average quantity or average concentration data are not reported by the facility (i.e., the maximum values are the best data available).

---

EPA analyzed a subset of the PCS data to determine how often maximum values are used in the annual load estimations. EPA determined that maximum concentration values were used to calculate loads for 42 percent of the TWPE, for the subset of data analyzed. Table 4-16 shows the total pounds discharged, the total TWPE discharged, and the percent of the total TWPE based on the different measurement fields for the subset of data analyzed. For more details on this analysis, see the memorandum entitled, *Response to Comments: Database Methodology Issues*, dated November 2006 (Bartram, 2006).

**Table 4-16. Loadings and TWPE from Different Measurement Values for a Subset of PCS Data**

| Measurement Field                         | Pounds             | TWPE           | Percent of Total TWPE |
|---|--------------------|----------------|-----------------------|
| Maximum Value (concentration or quantity) | 110,000,000        | 137,000        | 42%                   |
| Other Value                               | 73,500,000         | 189,000        | 58%                   |
| <b>Total</b>                              | <b>183,000,000</b> | <b>326,000</b> |                       |

Source: Response to Comments: Database Methodology Issues (Bartram, 2006).

The use of the maximum values may overestimate discharged pollutant loads, and EPA acknowledges that a significant portion of its pollutant loads may be calculated using maximum values for flows and/or concentrations. However, EPA is using the best available data from PCS. EPA calculates annual loads primarily using average values. EPA only uses maximum values when average values are unavailable.

#### *Nutrients Analysis Data Issues*

EPA began an investigation of the nutrients (nitrogen and phosphorus) discharged by each point source category, estimating the total pounds of nitrogen (nitrate, nitrite, ammonia, total nitrogen) and phosphorus (phosphates). EPA requested additional information from industry to confirm the reported discharges of nutrients and discovered several complications in calculating the nutrient loads. These included difficulties in determining which outfall(s) to exclude to avoid double-counting effluent flows, assessing intake water pollutant loadings, and identifying which outfalls represented wastewaters from process operations. For example, some facilities monitor and report nutrient discharges from landfills and nonprocess-area stormwater run-off. Because of the data quality issues associated with the nutrients data in the *PCSLoads2002\_v4* database, EPA decided not to continue the analysis for the 2006 annual review. EPA intends to pursue means for improving the data review for nutrients discharges in future review cycles. Table 4-17 summarizes the data quality issues identified during the nutrients analysis and EPA's findings. For more details on this analysis see the memorandum entitled *Review of Nitrogen and Phosphorus Loads Calculated Using 2002 PCS Data*, dated November 2006 (Bicknell, 2006c).

**Table 4-17. Nutrient Analysis Data Quality Issues**

| Data Quality Issue               | Findings from Analysis   |
|----------------------------------|--|
| Internal Monitoring Points       | EPA conducted a permit review of the top nutrient dischargers and determined that many of the nutrient loadings are overestimated due to double-counting of loads from internal monitoring points. EPA zeroed the double-counted loads, when identified. |
| Intake Water                     | EPA determined that for many of the large nutrient discharges, the majority of the load was due to the intake water and not from the industrial process.   |
| Identification of Discharge Pipe | EPA determined that many of the nutrient discharges were from nonprocess wastewater such as landfill leachate, stormwater runoff, or other nonprocess areas.   |

Source: Review of Nitrogen and Phosphorus Loads Calculated Using 2002 PCS Data (Bicknell, 2006c).

#### 4.6 References

API. 1994. American Petroleum Institute. *Transport and Fate of Non-BTEX Petroleum Chemicals in Soil and Groundwater* (API Publication Number 4593, Appendix A, September). DCN 00407.

Bartram, Deb. 2006. Eastern Research Group, Inc. Memorandum to Carey Johnston and Jan Matuszko, U.S. EPA. “Response to Comments: Database Methodology Issues.” (November). DCN 04074.

Berg, Roland. 2005. Telephone conversation with Roland Berg of Tower Automotive Products Co Inc., Corydon, IN, and Jessica Wolford of Eastern Research Group, Inc. “Tower Automotive Products Co Inc Corydon Facility Sodium Nitrite Releases in TRI.” (December 6). DCN 02447.

Bertrand, William. 2005. Telephone conversation with William Bertrand of Domtar, Ashdown, AR, and Bryan Lange of Eastern Research Group, Inc. “Reported Dioxin Discharge Increased Significantly from 2002 to 2003.” (November 9). DCN 02786.

Bicknell, Betsy and TJ Finseth. 2006a. Eastern Research Group, Inc. Memorandum to Carey Johnston and Jan Matuszko, U.S. EPA. “Comments Received Regarding POTW Removals.” (September 8). DCN 03676.

Bicknell, Betsy and TJ Finseth. 2006b. Eastern Research Group, Inc. Memorandum to Carey Johnston and Jan Matuszko, U.S. EPA. “Comments Received Regarding Toxic-Weighting Factors.” (September 8). DCN 03675.

Bicknell, Betsy. 2006c. Eastern Research Group, Inc. Memorandum to Public Record for the Effluent Guidelines Program Plan 2005/2006, EPA Docket Number OW-2004-0032. “Review of Nitrogen and Phosphorus Loads Calculated Using 2002 PCS Data.” (November). DCN 04075.

Brignac, Karen. 2005. Telephone conversation with Karen Brignac of PPM Consulting and TJ Finseth of Eastern Research Group, Inc. “Colfax Dioxin, Creosote, and PACs Discharges to TRI 2003.” (December 6). DCN 03742.

Dalrymple, Becky. 2005. Telephone conversation with Becky Dalrymple of Vonroll VTI, East Liverpool, OH, and TJ Finseth of Eastern Research Group, Inc. “Vonroll East Liverpool Benzidine Discharges in TRI 2002.” (February 15). DCN 01548.

Deprimo, Lillian. 2005. Telephone conversation with Lillian Deprimo of Cemex Inc., Dixon, IL, and Jessica Wolford of Eastern Research Group, Inc. “Cemex Inc. Dixon Cement Plant Dioxin Releases in TRI 2003.” (December 20). DCN 02546.

Eastep, Jesse. 2005. Telephone conversation with Jesse Eastep of LNVA North Regional Treatment Plant, Beaumont, TX, and Jessica Wolford of Eastern Research Group, Inc. “LNVA North Regional Treatment Plant PACs Releases in TRI 2003.” (November 28). DCN 02442.

EIA. 2001. Energy Information Administration, Office of Oil and Gas. *Petroleum Supply Annual 2000, Vol. 1*, Page 6. (June). DCN 02270.

Finseth, TJ. 2006. Eastern Research Group, Inc. Memorandum to the 2006 Effluent Guidelines Program Plan Docket, EPA Docket Number OW-2004-0032. “Changes Made to the PCSLoads2002 Database Based on Facility-Specific Comments.” (October 17). DCN 03190.

IARC. 1985. World Health Organization, International Agency on Research for Cancer. Monographs, Vol 35, pg. 83. “Coal Tar and Derived Products.” DCN 03903.

Matuszko, Jan, Betsy Bicknell, and Bryan Lange. 2006. U.S. EPA and Eastern Research Group, Inc. Memorandum to Public Record for the Effluent Guidelines Program Plan 2005/2006, EPA Docket Number OW-2004-0032. “Calculation of Category-Specific Toxic Weighting Factor for ‘Dioxin and Dioxin-Like Compounds’ Reported Released to EPA’s Toxic Release Inventory (TRI) by Pulp, Paper, and Paperboard Mills.” (September 12). DCN 03683.

NCASI. 1998. National Council for Air and Stream Improvement, Inc. *Handbook of Chemical-Specific Information for SARA Section 313 Form R Reporting*. DCN 01753.

OMB. 1987. Office of Management and Budget. *Standard Industrial Classification Manual*. 1987.

Rollins, Martin. 2005. H. M. Rollins Company, Inc. Memorandum to Johnston, Carey, U.S. EPA. “Creosote Wood Treating Industry Storm Water Runoff Study Conducted on Behalf of the Southern Pressure Treaters Association and Creosote Council III.” (May 26). DCN 02077.

Rountree, Mona. 2005. Telephone conversation with Mona Rountree of ONYX Environmental Services LLC., Port Arthur, TX, and TJ Finseth of Eastern Research Group, Inc. “ONYX Chlordane, Heptachlor, Toxaphene, Benzidine, and Hexachlorobenzene Discharges in TRI 2003.” (December 5). DCN 03741.

U.S. EPA. 2000. *EPCRA Section 313 Guidance for Reporting Toxic Chemicals Within the Dioxins and Dioxin-Like Compounds Category*. EPA-745-B-00-021. Washington, DC. (December). DCN 01164.

U.S. EPA. 2001. *EPCRA Section 313: Guidance for Reporting Toxic Chemicals: Polycyclic Aromatic Compounds Category*. EPA-260-B-01-03. Washington, DC. (August). DCN 01996.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *Draft Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process*. Washington, DC. June. DCN 02013.

U.S. EPA. 2005b. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2006a. *Toxic Weighting Factor Development in Support of CWA 304(m) Planning Process*. Washington, DC. (June). DCN 03196.

U.S. EPA. 2006b. *Final Report: Pulp, Paper, and Paperboard Detailed Study*. EPA-821-R-06-016. Washington, DC. (November). DCN 03400.

Van den Berg, et al. 1998. “Toxic Equivalency Factors (TEFs) for PCBs, PCDDs, PCDFs, for Humans and Wildlife.” *Environ. Health Perspect.* 106:775-792. DCN 01259.

**PART II: RESULTS OF THE  
2006 ANNUAL REVIEW OF INDUSTRIAL  
CATEGORIES WITH EXISTING ELGS**

## **5.0 2006 ANNUAL REVIEW OF EXISTING EFFLUENT LIMITATIONS GUIDELINES AND STANDARDS AND RANKING OF POINT SOURCE CATEGORIES**

For the 2006 annual review, EPA conducted the following activities:

- Updated the reviews from previous years (i.e., revising the 2005 annual review results with new or corrected data);
- Performed new research: contacting industry to verify discharges, conducting literature searches, and collecting additional data; and
- Solicited information from stakeholders through comment response and other stakeholder outreach (e.g., meetings with industry trade groups).

This section summarizes the results from the 2005 annual review (Section 5.1), presents the results of the 2006 screening-level review (Section 5.2), and presents the prioritization of categories for the 2006 annual review (Section 5.3).

### **5.1 Summary of the Results from the 2005 Annual Review**

EPA published its 2005 annual review of existing ELGs on August 29, 2005 (70 FR 51042). In the 2005 annual review, EPA identified 13 point source categories that represent the bulk of the estimated toxic discharges (as measured by TWPE) from existing industrial point source categories. EPA ranked each point source category by the amount of toxic pollutants in its discharge (as measured by TWPE) and identified the Steam Electric Power Generating and Pulp, Paper, and Paperboard Point Source Categories as the two categories with the highest TWPE. EPA identified 11 additional categories with potentially high TWPE discharge estimates. EPA collected and analyzed information on the pollutants discharged and wastewater treatment at these 11 categories but assigned a higher priority to investigating the Pulp, Paper, and Paperboard and Steam Electric Power Generating Point Source Categories.

In view of the annual nature of its reviews of existing ELGs, EPA believes that each annual review can and should influence succeeding annual reviews (e.g., by indicating data gaps, identifying new pollutants or pollution reduction technologies, or otherwise highlighting industrial categories for more detailed scrutiny in subsequent years). EPA used the findings, data and comments on the 2005 annual review to inform its 2006 annual review. The 2005 review built on the previous reviews by continuing to use the screening methodology, incorporating some refinements to assigning discharges to categories, and updating toxic weighting factors used to estimate potential hazards of toxic pollutant discharges. Likewise, EPA made similar refinements to assigning discharges to categories and updating toxic weighting factors used to estimate potential hazards of toxic pollutant discharges for the 2006 annual review.

### **5.2 Results of the 2006 Screening-Level Review**

For the 2006 screening-level review, EPA combined the results of the *TRIRelases2002\_v4* and the *PCSLoads2002\_v4* databases, which are presented in Section 4.5 of this document. When combining the results of the databases, EPA made adjustments to the rankings for the following: discharges from industrial categories for which EPA is currently

---

developing or revising ELGs, discharges from point source categories for which EPA has recently promulgated or revised ELGs, and discharges from facilities determined not to be representative of their category. Sections 5.2.1 through 5.2.3 discuss the rationale for these decisions. In addition, EPA created a final ranking using the *TRIRelases2003\_v2* database, accounting for the same adjustments. The final combined database rankings represent the results of the 2006 screening-level review and are presented in Section 5.2.4.

### **5.2.1 Facilities for Which EPA is Currently Developing or Revising ELGs**

EPA is currently considering revisions to ELGs for Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) (40 CFR 414) and the Inorganic Chemicals Manufacturing (40 CFR 415) Point Source Categories for facilities that produce chlorine or chlorinated hydrocarbons (CCH)<sup>9</sup>. Because the CCH rulemaking is underway, EPA excluded discharges from these facilities from further consideration under the current planning cycle. EPA subtracted the TWPE loads from facilities that produce chlorine or chlorinated hydrocarbons from the OCPSF and Inorganic Chemicals Manufacturing Point Source Category loads. Because facilities that produce chlorine and chlorinated hydrocarbons are only a subset of the OCPSF and Inorganic Chemicals Manufacturing Categories, EPA included loads for all other facilities in these two categories in its prioritization of categories for further review.

### **5.2.2 Categories for Which EPA Recently Promulgated or Revised ELGs**

For the 2006 annual review and development of category rankings, EPA did not prioritize point source categories for which ELGs were recently established or revised but not yet fully implemented, or were recently reviewed. In general, EPA removes a category from further consideration during a review cycle if EPA established, revised, or reviewed the category's ELGs within seven years prior to the current annual review. This seven-year period allows time for the ELGs to be incorporated into NPDES permits. For the 2006 annual review, this equates to any category with ELGs established or revised after 1999. Table 5-1 lists these categories.

Removing a point source category from further consideration in the development of the rankings does not mean that EPA eliminates the category from annual review. In cases where EPA is aware of the growth of a new segment within such category, or where new concerns are identified for previously unevaluated pollutants discharged by facilities in the category, EPA would apply closer scrutiny to the discharges from the category in deciding whether to consider it further during the current review cycle. For example, EPA plans to conduct a detailed study of the coal mining industry based on comments received on the 2006 Preliminary Plan, although the coal mining ELGs were revised in January 2002.

---

<sup>9</sup> EPA is also currently revising the CAFOs ELG; however, the TWPE associated with this category is low and does not affect the prioritization of categories based on TWPE.

---

**Table 5-1. Point Source Categories That Have Undergone a Recent Rulemaking or Review**

| <b>40 CFR Part Number</b> | <b>Point Source Category</b>   | <b>Date of Rulemaking</b> |
|---------------------------|--|---------------------------|
| 451                       | Concentrated Aquatic Animal Production (or Aquaculture)                      | August 23, 2004           |
| 432                       | Meat and Poultry Products  | September 8, 2004         |
| 413, 433, and 438         | Metal Products and Machinery (including Metal Finishing and Electroplating)  | May 13, 2003              |
| 122, 123, and 412         | Concentrated Animal Feeding Operations (CAFOs)                               | February 12, 2003         |
| 420                       | Iron and Steel Manufacturing   | October 17, 2002          |
| 434                       | Coal Mining (Coal Remining and Western Alkaline Coal Mining)                 | January 23, 2002          |
| 435                       | Oil & Gas Extraction (Synthetic-Based and Other Non-Aqueous Drilling Fluids) | February 21, 2001         |
| 136 and 437               | Centralized Waste Treatment  | December 22, 2000         |
| 442                       | Transportation Equipment Cleaning  | August 14, 2000           |
| 444                       | Commercial Hazardous Waste Combustors  | January 27, 2000          |
| 136 and 445               | Landfills  | January 19, 2000          |

Source: “Guidelines: Final, Proposed, and Under Development” at <http://www.epa.gov/waterscience/guide>. (U.S. EPA, 2006a).

### **5.2.3 Categories with One Facility Dominating the TWPE**

EPA identified point source categories where only one facility was responsible for most of the TWPE reported to be discharged (i.e., where one facility’s TWPE accounted for more than 95 percent of the category TWPE). Table 5-2 lists these categories. EPA identified four facilities that dominated the TWPE in the category to which they belonged. EPA investigated these facilities to determine if their discharges were representative of the category. If they were not, EPA subtracted the facility’s TWPE from the total category TWPE and recalculated the category’s ranking. EPA performed this analysis separately for each of the three databases. EPA’s investigation of these facilities is detailed in a memorandum, entitled PCS and TRI Facilities that Dominate the Total Point Source Category TWPE (Kandle, 2006).

Table 5-2. Point Source Categories with One Facility Dominating the TWPE Discharges

| Point Source Category                | Facility with Over 95% of Category TWPE | City, State   | Data Source | Pollutant Driving TWPE                   | Facility TWPE | % of Total Category TWPE | Action                                 |
|--------------------------------------|---|---------------|-------------|--|---------------|--------------------------|--|
| Gum and Wood Chemicals Manufacturing | Hercules-Brunswick                      | Brunswick, GA | PCS 2002    | Toxaphene (3,771,372 TWPE)               | 3,800,000     | 99.9%                    | Removed load from category TWPE        |
| Plastic Molding and Forming          | Innovia Films                           | Tecumseh, KS  | PCS 2002    | Carbon Disulfide (19,785 TWPE)           | 20,300        | 98.0%                    | Did not remove load from category TWPE |
| Miscellaneous Foods and Beverages    | Bacardi Corporation                     | Catano, PR    | PCS 2002    | Sulfide (313,970 TWPE)                   | 327,000       | 97.2%                    | Removed load from category TWPE        |
| Gum and Wood Chemicals Manufacturing | Hercules-Brunswick                      | Brunswick, GA | TRI 2002    | Carbon Disulfide (12,804 TWPE)           | 12,800        | 98.8%                    | Removed load from category TWPE        |
| Aluminum Forming                     | Kaiser Aluminum & Chemical Corporation  | Spokane, WA   | TRI 2002    | Polychlorinated Biphenyls (935,924 TWPE) | 936,000       | 99.5%                    | Removed load from category TWPE        |
| Gum and Wood Chemicals Manufacturing | Hercules-Brunswick                      | Brunswick, GA | TRI 2003    | Carbon Disulfide (7,117 TWPE)            | 7,120         | 97.7%                    | Removed load from category TWPE        |

Source: *TRIRelases2002\_v4*; *PCSLoads2002\_v4*; *TRIRelases2003\_v2*.

#### **5.2.4 Results of the 2006 Screening-Level Review**

After adjusting the category TWPE totals and rankings as described in Sections 5.2.1 through 5.2.3, EPA consolidated the PCS and TRI rankings into one set using the following steps:

- EPA combined the two lists of point source categories by adding each category's PCS TWPE and TRI TWPE. EPA noted that this may result in "double-counting" of chemicals a facility reported to both PCS and TRI, and "single-counting" of chemicals reported in only one of the databases. The combined databases do not count chemicals that may be discharged but are not reported to PCS or TRI.
- EPA then ranked the point source categories based on total PCS and TRI TWPE.

Table 5-3 presents the combined PCS 2002 and TRI 2002 rankings. These are the final category rankings accounting for all corrections made to the databases during the 2005 and 2006 annual reviews and removal of any categories and discharges as discussed in Sections 5.2.1 through 5.2.3.

Table 5-4 presents the final rankings for TRI 2003 excluding the categories for which EPA is currently developing or revising ELGs, categories for which EPA recently promulgated or revised ELGs, and discharges from facilities that dominate the category TWPE, but are not representative of the category. Four of the top five categories by TWPE from the combined TRI and PCS 2002 data (Table 5-3) are in the top five categories from the TRI 2003 data (Table 5-4), with only the Fertilizer Category not represented at the top of TRI 2003 rankings.

#### **5.3 Prioritization of Categories for the 2006 Annual Review**

Based on its screening level review, EPA was able to prioritize for further review (i.e., a detailed study or preliminary category review) those industrial categories whose pollutant discharges potentially pose the greatest hazards to human health or the environment because of their toxicity (i.e., categories that collectively discharge over 95 percent of the total TWPE). EPA also considered efficiency and implementation issues raised by stakeholders in identifying candidates for further review. By using this multilayered screening approach, the Agency concentrated its resources on those point source categories with the highest estimates of toxic-weighted pollutant discharges (based on best available data), while assigning a lower priority to categories that the Agency believes are not good candidates for ELGs revision at this time.

Table 5-5 lists the point source categories with existing ELGs, the level of review EPA performed as part of the 2006 annual review, and how the category was identified for further review, if applicable.

Table 5-3. Final PCS 2002 and TRI 2002 Combined Point Source Category Rankings

| 40 CFR Part | Point Source Category                            | PCS 2002 TWPE | TRI 2002 TWPE | Total TWPE | Cumulative Percentage of Total TWPE | Rank |
|-------------|--|---------------|---------------|------------|-------------------------------------|------|
| 430         | Pulp, Paper and Paperboard                       | 1,540,000     | 1,980,000     | 3,520,000  | 33.00%                              | 1    |
| 423         | Steam Electric Power Generation                  | 982,000       | 833,000       | 1,810,000  | 50.04%                              | 2    |
| 418         | Fertilizer Manufacturing                         | 1,370,000     | 9,060         | 1,380,000  | 62.99%                              | 3    |
| 414         | Organic Chemicals, Plastics and Synthetic Fibers | 398,000       | 349,000       | 747,000    | 70.00%                              | 4    |
| 419         | Petroleum Refining                               | 165,000       | 467,000       | 632,000    | 75.94%                              | 5    |
| 455         | Pesticide Chemicals Manufacturing                | 50,300        | 555,000       | 605,000    | 81.62%                              | 6    |
| 440         | Ore Mining and Dressing                          | 410,000       | 70,200        | 480,000    | 86.13%                              | 7    |
| 421         | Nonferrous Metals Manufacturing                  | 397,000       | 51,800        | 449,000    | 90.34%                              | 8    |
| 415         | Inorganic Chemicals                              | 107,000       | 186,000       | 293,000    | 93.10%                              | 9    |
| 463         | Plastic Molding and Forming                      | 20,700        | 113,000       | 134,000    | 94.35%                              | 10   |
| 410         | Textile Mills                                    | 123,000       | 3,710         | 127,000    | 95.54%                              | 11   |
| 467         | Aluminum Forming                                 | 61,500        | 4,360         | 65,900     | 96.16%                              | 12   |
| 439         | Pharmaceutical Manufacturing                     | 48,600        | 11,100        | 59,700     | 96.72%                              | 13   |
| 436         | Mineral Mining and Processing                    | 50,500        | 2,840         | 53,300     | 97.22%                              | 14   |
| 429         | Timber Products Processing                       | 1,100         | 48,000        | 49,100     | 97.69%                              | 15   |
| 422         | Phosphate Manufacturing                          | 44,300        | 300           | 44,600     | 98.10%                              | 16   |
| 464         | Metal Molding and Casting (Foundries)            | 9,880         | 16,000        | 25,900     | 98.35%                              | 17   |
| 409         | Sugar Processing                                 | 17,100        | 394           | 17,500     | 98.51%                              | 18   |
| 424         | Ferroalloy Manufacturing                         | 7,130         | 9,910         | 17,000     | 98.67%                              | 19   |
| 471         | Nonferrous Metals Forming and Metal Powders      | 5,750         | 10,800        | 16,500     | 98.83%                              | 20   |
| NA          | Miscellaneous Foods and Beverages                | 9,567         | 6,860         | 16,400     | 98.98%                              | 21   |
| 407         | Fruits and Vegetable Processing                  | 4,350         | 9,450         | 13,800     | 99.11%                              | 22   |
| 425         | Leather Tanning and Finishing                    | 3,260         | 9,880         | 13,100     | 99.23%                              | 23   |
| 469         | Electrical and Electronic Components             | 5,130         | 6,340         | 11,500     | 99.34%                              | 24   |
| 457         | Explosives                                       | 8,750         | 2,280         | 11,000     | 99.45%                              | 25   |
| 468         | Copper Forming                                   | 3,550         | 6,060         | 9,610      | 99.54%                              | 26   |
| 428         | Rubber Manufacturing                             | 2,350         | 5,100         | 7,450      | 99.61%                              | 27   |

Table 5-3 (Continued)

| 40 CFR Part  | Point Source Category                           | PCS 2002 TWPE    | TRI 2002 TWPE    | Total TWPE        | Cumulative Percentage of Total TWPE | Rank |
|--------------|---|------------------|------------------|-------------------|-------------------------------------|------|
| NA           | Tobacco Products                                | 2                | 7,120            | 7,130             | 99.67%                              | 28   |
| 465          | Coil Coating                                    | 6,390            | 39               | 6,430             | 99.73%                              | 29   |
| 406          | Grain Mills Manufacturing                       | 964              | 4,660            | 5,620             | 99.79%                              | 30   |
| 411          | Cement Manufacturing                            | 2,190            | 2,030            | 4,210             | 99.83%                              | 31   |
| 426          | Glass Manufacturing                             | 1,410            | 2,540            | 3,950             | 99.86%                              | 32   |
| 461          | Battery Manufacturing                           | 88               | 3,150            | 3,230             | 99.89%                              | 33   |
| 405          | Dairy Products Processing                       | 43               | 2,830            | 2,870             | 99.92%                              | 34   |
| 417          | Soaps and Detergents Manufacturing              | 270              | 1,750            | 2,020             | 99.94%                              | 35   |
| NA           | Printing & Publishing                           | 1,680            | 209              | 1,890             | 99.96%                              | 36   |
| 408          | Canned and Preserved Seafood                    | 867              | 138              | 1,000             | 99.97%                              | 37   |
| NA           | Independent And Stand Alone Labs                | 610              | 177              | 787               | 99.97%                              | 38   |
| 443          | Paving and Roofing Materials (Tars and Asphalt) | 487              | 104              | 592               | 99.98%                              | 39   |
| 458          | Carbon Black Manufacturing                      | -                | 514              | 514               | 99.98%                              | 40   |
| 446          | Paint Formulating                               | -                | 503              | 503               | 99.99%                              | 41   |
| 466          | Porcelain Enameling                             | 17               | 398              | 415               | 99.99%                              | 42   |
| 460          | Hospital  | 5                | 382              | 387               | 100.00%                             | 43   |
| NA           | Construction and Development                    | 188              | -                | 188               | 100.00%                             | 44   |
| 454          | Gum and Wood Chemicals                          | 32               | 156              | 188               | 100.00%                             | 45   |
| 447          | Ink Formulating                                 | -                | 94               | 94                | 100.00%                             | 46   |
| 427          | Asbestos Manufacturing                          | -                | 6                | 6                 | 100.00%                             | 47   |
| 459          | Photographic                                    | -                | -                | -                 | 100.00%                             | 48   |
| NA           | Photo Processing                                | -                | -                | -                 | 100.00%                             | 49   |
| <b>Total</b> |   | <b>5,860,000</b> | <b>4,790,000</b> | <b>10,700,000</b> |                                     |      |

Source: *TRIRelases2002\_v4*; *PCSLoads2002\_v4*.

NA – Not applicable; no existing ELGs apply to discharges.

Table 5-4. Final TRI 2003 Rankings

| 40 CFR Part | Point Source Category                            | Total Pounds Released | TWPE      |
|-------------|--|-----------------------|-----------|
| 430         | Pulp, Paper and Paperboard                       | 21,100,000            | 2,880,000 |
| 423         | Steam Electric Power Generation                  | 3,350,000             | 1,060,000 |
| 414         | Organic Chemicals, Plastics and Synthetic Fibers | 37,900,000            | 1,020,000 |
| 419         | Petroleum Refining                               | 17,300,000            | 498,000   |
| 455         | Pesticide Chemicals Manufacturing                | 1,930,000             | 485,000   |
| 429         | Timber Products Processing                       | 40,000                | 249,000   |
| 415         | Inorganic Chemicals                              | 8,830,000             | 182,000   |
| 463         | Plastic Molding and Forming                      | 1,490,000             | 107,000   |
| 421         | Nonferrous Metals Manufacturing                  | 2,760,000             | 78,400    |
| 440         | Ore Mining and Dressing                          | 597,000               | 77,600    |
| 424         | Ferroalloy Manufacturing                         | 438,000               | 24,500    |
| 464         | Metal Molding and Casting (Foundries)            | 220,000               | 12,800    |
| 439         | Pharmaceutical Manufacturing                     | 2,110,000             | 12,100    |
| 471         | Nonferrous Metals Forming and Metal Powders      | 1,280,000             | 10,600    |
| 418         | Fertilizer Manufacturing                         | 5,280,000             | 10,300    |
| 411         | Cement Manufacturing                             | 4,590                 | 10,200    |
| 425         | Leather Tanning and Finishing                    | 368,000               | 9,250     |
| 407         | Fruits and Vegetable Processing                  | 7,320,000             | 7,170     |
| 468         | Copper Forming                                   | 172,000               | 6,720     |
| 469         | Electrical and Electronic Components             | 3,780,000             | 6,630     |
| NA          | Tobacco Products                                 | 443,000               | 6,520     |
| NA          | Miscellaneous Foods and Beverages                | 5,560,000             | 5,440     |
| 426         | Glass Manufacturing                              | 253,000               | 4,650     |
| 461         | Battery Manufacturing                            | 38,500                | 4,510     |
| 428         | Rubber Manufacturing                             | 727,000               | 4,400     |
| 417         | Soaps and Detergents Manufacturing               | 109,000               | 4,000     |
| 406         | Grain Mills Manufacturing                        | 1,810,000             | 3,800     |
| 405         | Dairy Products Processing                        | 4,640,000             | 3,620     |
| 467         | Aluminum Forming                                 | 958,000               | 3,520     |
| 410         | Textile Mills                                    | 451,000               | 3,450     |
| 436         | Mineral Mining and Processing                    | 2,180,000             | 2,890     |
| 443         | Paving and Roofing Materials (Tars and Asphalt)  | 737                   | 518       |
| 446         | Paint Formulating                                | 88,600                | 514       |
| 458         | Carbon Black Manufacturing                       | 11                    | 483       |
| 422         | Phosphate Manufacturing                          | 65,700                | 480       |
| 466         | Porcelain Enameling                              | 70,700                | 363       |
| 409         | Sugar Processing                                 | 339,000               | 309       |
| NA          | Printing & Publishing                            | 15,400                | 297       |
| NA          | Independent and Stand Alone Labs                 | 80,100                | 202       |
| 408         | Canned and Preserved Seafood                     | 237,000               | 179       |
| 454         | Gum and Wood Chemicals                           | 23,700                | 164       |
| 457         | Explosives                                       | 27,400                | 47        |
| 465         | Coil Coating                                     | 608                   | 45        |
| 447         | Ink Formulating                                  | 5,490                 | 45        |
| 427         | Asbestos Manufacturing                           | 676                   | 5         |

Source: *TRIRelases2003\_v2*.

NA – Not applicable; no existing ELGs apply to discharges.

**Table 5-5. 2006 Annual Review of Categories with Existing ELGs: Level of Review**

| <b>40 CFR Part</b> | <b>Point Source Category</b>                     | <b>Level of Review</b>                              | <b>Source of Identification for Further Review</b> |
|--------------------|--|---|--|
| 405                | Dairy Products Processing                        | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 406                | Grain Mills Manufacturing                        | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 407                | Fruits and Vegetable Processing                  | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 408                | Canned and Preserved Seafood                     | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 409                | Sugar Processing                                 | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 410                | Textile Mills                                    | Preliminary Review                                  | TWPE   |
| 411                | Cement Manufacturing                             | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 412                | Concentrated Animal Feeding Operations           | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 413                | Electroplating                                   | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 414                | Organic Chemicals, Plastics and Synthetic Fibers | Preliminary Review                                  | TWPE   |
| 415                | Inorganic Chemicals                              | Preliminary Review                                  | TWPE   |
| 417                | Soaps and Detergents Manufacturing               | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 418                | Fertilizer Manufacturing                         | Preliminary Review                                  | TWPE   |
| 419                | Petroleum Refining                               | Preliminary Review                                  | TWPE   |
| 420                | Iron and Steel Manufacturing                     | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 421                | Nonferrous Metals Manufacturing                  | Preliminary Review                                  | TWPE   |
| 422                | Phosphate Manufacturing                          | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 423                | Steam Electric Power Generation                  | Detailed Study                                      | TWPE   |
| 424                | Ferroalloy Manufacturing                         | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 425                | Leather Tanning and Finishing                    | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 426                | Glass Manufacturing                              | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 427                | Asbestos Manufacturing                           | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 428                | Rubber Manufacturing                             | Preliminary Review                                  | TWPE   |
| 429                | Timber Products Processing                       | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 430                | Pulp, Paper and Paperboard                       | Detailed Study                                      | TWPE   |
| 432                | Meat and Poultry Products                        | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 433                | Metal Finishing                                  | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 434                | Coal Mining                                      | Preliminary Review                                  | Comments   |
| 435                | Oil & Gas Extraction                             | Preliminary Review (of Coal Bed Methane Operations) | Comments   |
| 436                | Mineral Mining and Processing                    | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 437                | Centralized Waste Treaters                       | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 438                | Metal Products and Machinery                     | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 439                | Pharmaceutical Manufacturing                     | Screening-Level Review                              | NA <sup>a</sup>                                    |
| 440                | Ore Mining and Dressing                          | Preliminary Review                                  | TWPE   |
| 442                | Transportation Equipment Cleaning                | Screening-Level Review                              | NA <sup>a</sup>                                    |

Table 5-5 (Continued)

| 40 CFR Part | Point Source Category   | Level of Review        | Source of Identification for Further Review |
|-------------|---|------------------------|---|
| 443         | Paving and Roofing Materials (Tars and Asphalt)                       | Screening-Level Review | NA <sup>a</sup>                             |
| 444         | Waste Combustors (Commercial Incinerators Combusting Hazardous Waste) | Screening-Level Review | NA <sup>a</sup>                             |
| 445         | Landfills   | Screening-Level Review | NA <sup>a</sup>                             |
| 446         | Paint Formulating   | Screening-Level Review | NA <sup>a</sup>                             |
| 447         | Ink Formulating   | Screening-Level Review | NA <sup>a</sup>                             |
| 451         | Aquatic Animal Production Industry                                    | Screening-Level Review | NA <sup>a</sup>                             |
| 454         | Gum and Wood Chemicals  | Screening-Level Review | NA <sup>a</sup>                             |
| 455         | Pesticide Chemicals Manufacturing                                     | Preliminary Review     | TWPE  |
| 457         | Explosives  | Screening-Level Review | NA <sup>a</sup>                             |
| 458         | Carbon Black Manufacturing  | Screening-Level Review | NA <sup>a</sup>                             |
| 459         | Photographic  | Screening-Level Review | NA <sup>a</sup>                             |
| 460         | Hospital  | Screening-Level Review | NA <sup>a</sup>                             |
| 461         | Battery Manufacturing   | Screening-Level Review | NA <sup>a</sup>                             |
| 463         | Plastic Molding and Forming   | Preliminary Review     | TWPE  |
| 464         | Metal Molding and Casting (Foundries)                                 | Screening-Level Review | NA <sup>a</sup>                             |
| 465         | Coil Coating  | Screening-Level Review | NA <sup>a</sup>                             |
| 466         | Porcelain Enameling   | Preliminary Review     | TWPE  |
| 467         | Aluminum Forming  | Screening-Level Review | NA <sup>a</sup>                             |
| 468         | Copper Forming  | Screening-Level Review | NA <sup>a</sup>                             |
| 469         | Electrical and Electronic Components                                  | Screening-Level Review | NA <sup>a</sup>                             |
| 471         | Nonferrous Metals Forming and Metal Powders                           | Screening-Level Review | NA <sup>a</sup>                             |

<sup>a</sup>For categories with only a screening-level review, the source of identification is not applicable, as EPA conducts a screening-level review of all categories subject to existing effluent guidelines. The “source of identification” is only applicable for those industries selected for further review.

NA – Not available.

### 5.3.1 Detailed Study of Existing ELGs

As a result of its 2005 screening-level review, EPA identified two point source categories with existing effluent guidelines and pretreatment standards for detailed study because they ranked first and second in combined TWPE rankings: Pulp, Paper, and Paperboard (Part 430) and Steam Electric Power Generating (Part 423). EPA's detailed studies generally examine the following: (1) wastewater characteristics and pollutant sources; (2) the pollutants driving the toxic-weighted pollutant discharges; (3) availability of pollution prevention and treatment; (4) the geographic distribution of facilities in the industry; (5) any pollutant discharge trends within the industry; and (6) any relevant economic factors. First, EPA attempts to verify the screening-level results and to fill in data gaps. Next, EPA considers costs and performance of applicable and demonstrated technology, process change, or pollution prevention alternatives that can effectively reduce the pollutants remaining in the industrial category's wastewater. Lastly, EPA considers the affordability or economic achievability of the technology, process change, or pollution prevention measures identified above.

Types of data sources that EPA may consult in conducting its detailed studies include, but are not limited to: (1) U.S. Economic Census; (2) TRI and PCS data; (3) trade associations and reporting facilities to verify reported releases and facility categorization; (4) regulatory authorities (states and EPA regions) to understand how category facilities are permitted; (5) NPDES permits and their supporting fact sheets; (6) EPA effluent guidelines technical development documents; (7) relevant EPA preliminary data summaries or study reports; and (8) technical literature on pollutant sources and control technologies.

For more information about the pulp, paper, and paperboard and steam electric power generating detailed studies, see the *Final Report: Pulp, Paper, and Paperboard Detailed Study* and the *Detailed Summary Report: Steam Electric Detailed Study* (U.S. EPA, 2006c; U.S. EPA, 2006b).

### 5.3.2 Preliminary Review

Preliminary reviews are similar to detailed studies and have the same purpose. During preliminary reviews, EPA generally examines the same items listed above for detailed studies. However, EPA's preliminary review of a category and available pollution prevention and treatment options is less rigorous than its detailed studies. While EPA collects and analyzes hazard and technology-based information on categories undergoing preliminary review, it assigns a higher priority to investigating categories undergoing detailed studies.

EPA identified 11 point source categories for preliminary review based on their contribution to the overall TWPE. EPA also identified the coal mining industry and coal bed methane operations (under the Oil and Gas Extraction Point Source Category) for preliminary review based on comments on the 2006 Preliminary Plan. The 13 existing preliminary reviews are listed below along with a reference to where they are discussed in this report:

- Coal Bed Methane (Section 6.0);
- Coal Mining (Section 7.0);
- Fertilizer Manufacturing (Section 8.0);

- Inorganic Chemicals (Section 9.0);
- Nonferrous Metals Manufacturing (Section 10.0);
- Organic Chemicals, Plastics, and Synthetic Fibers (Section 11.0);
- Ore Mining and Dressing (Section 12.0);
- Pesticide Chemicals (Section 13.0);
- Petroleum Refining (Section 14.0);
- Plastics Molding and Forming (Section 15.0);
- Porcelain Enameling (Section 16.0);
- Rubber Manufacturing (Section 17.0); and
- Textile Mills (Section 18.0).

#### 5.4 References

Kandle, Meghan. 2006. Eastern Research Group, Inc. Memorandum to Public Record for the Effluent Guidelines Program Plan, EPA Docket Number OW-2004-0032. “PCS and TRI Facilities that Dominate the Total Point Source Category TWPE.” (November). DCN 04076.

U.S. EPA. 2006a. *Guidelines: Final, Proposed, and Under Development*. “Industrial Waters Pollution Control.” Available online at: <http://www.epa.gov/waterscience/guide>.

U.S. EPA. 2006b. *Detailed Summary Report: Steam Electric Detailed Study*. EPA-821-R-06-015. Washington, DC. (November). DCN 03401.

U.S. EPA. 2006c. *Final Report: Pulp, Paper, and Paperboard Detailed Study*. EPA-821-R-06-016. Washington, DC. (November). DCN 03400.

**6.0 COAL BED METHANE SUBCATEGORY OF THE OIL AND GAS EXTRACTION CATEGORY (40 CFR PART 435)**

EPA selected the coal bed methane (CBM) industry, a potential new subcategory of the Oil and Gas Extraction Category, for additional review as part of the 2006 annual review, because of comments received and changes in the industry since the 2004 annual review. In 2004, EPA determined that discharges from the CBM industry would be adequately controlled by permit writers using best professional judgment (BPJ). In addition, EPA received comments during the 2005 annual review from citizens and environmental advocacy groups requesting development of a regulation. For its 2006 annual review, EPA collected additional data on the number of U.S. wells producing CBM and their produced water disposal practices. EPA also gathered additional information on potential treatment technologies for CBM-produced water discharges. In particular, EPA conducted a site visit in the Powder River Basin, Wyoming and observed a number of CBM-produced water treatment technologies (U.S. EPA, 2006). This section summarizes EPA's 2006 annual review of the discharges associated with CBM production.

In conducting this 2006 annual review, EPA found that it will need to gather more information to determine whether it would be appropriate to conduct a rulemaking to potentially revise the effluent guidelines for the Oil and Gas Extraction Category to include limits for CBM. Therefore, EPA selected the CBM Subcategory for a detailed study in the 2007 and 2008 annual reviews. EPA intends to submit an Information Collection Request (ICR) to the Office of Management and Budget (OMB) for their review and approval under the Paperwork Reduction Act, 33 U.S.C. 3501, et seq.

**6.1 Current Applicability of Effluent Limitations Guideline for Oil and Gas Extraction**

As described below, the Oil and Gas Extraction ELGs do not currently regulate pollutant discharges from CBM extraction operations. EPA promulgated BPT limitations for the Oil and Gas Extraction Category (40 CFR Part 435) on April 13, 1979 (44 FR 22069). BAT, BCT, and NSPS limitations were promulgated on March 4, 1993 (58 FR 12454) for Subpart A: Offshore Subcategory and on December 16, 1996 (61 FR 66086) for Subpart D: Coastal Subcategory. None of these oil and gas extraction rulemakings considered CBM extraction in any of the supporting analyses or records. Specifically, EPA did not consider CBM production in developing the 1979 national technology-based ELGs for Subpart C: Onshore Subcategory and Subpart E: Agricultural and Wildlife Water Use Subcategory of the Oil and Gas Extraction Category, because there was no significant CBM production in 1979 (O'Farrell, 1989).

Additionally, EPA did not consider CBM production in developing the Coal Mining ELGs. EPA established ELGs for coal mine operations based on the use of the "best practicable control technology currently available" (BPT) for existing sources in the Coal Mining Category (40 CFR 434) on April 26, 1977 (42 FR 21380). These ELGs were revised on October 9, 1985 (50 FR 41296). More recently, EPA revised these ELGs again on January 23, 2002 (67 FR 3370) by adding two new subcategories to address pre-existing discharges at coal remining operations and drainage from coal mining reclamation and other non-process areas in the arid

and semi-arid western United States. None of these coal mining rulemakings considered CBM extraction in any of the supporting analyses or records.

Table 6-1 lists the existing subcategories for the Oil and Gas Extraction Category and describes their applicability.

**Table 6-1. Applicability of Subcategories in the Oil and Gas Extraction Category**

| Subpart | Subpart Name                        | Subpart Applicability   |
|---------|-------------------------------------|---|
| A       | Offshore                            | Applicable to facilities engaged in field exploration, drilling, well production, and well treatment that are located in waters that are offshore. Offshore is defined as seaward of the inner boundary of the territorial seas.  |
| B       | Reserved                            |   |
| C       | Onshore                             | Applicable to facilities engaged in field exploration, drilling, well completion, and well treatment that are located onshore. Onshore is defined as landward of the inner boundary of the territorial seas.  |
| D       | Coastal                             | Applicable to facilities engaged in field exploration, drilling, well production, and well treatment that are located in coastal waters. Coastal is defined as landward of the inner boundary of the territorial seas or landward of the inner boundary of the territorial seas and bounded on the inland side by the line defined by the inner boundary of the territorial seas. |
| E       | Agricultural and Wildlife Water Use | Applicable to onshore facilities engaged in field exploration, drilling, well completion, and well treatment that are located in the United States west of the 98 <sup>th</sup> meridian for which the produced water has a use in agriculture or wildlife propagation when discharged to navigable waters.   |
| F       | Stripper <sup>a</sup>               | Applicable to onshore facilities engaged in production and well treatment that produce 10 barrels per well per calendar day or less of crude oil and are operating at the maximum feasible rate of production.  |
| G       | General Provisions <sup>a</sup>     | Prevents oil and gas facilities applicable to 40 CFR Part 435 Subparts A through F from circumventing the ELGs by moving effluent discharges from one subcategory to another for disposal under less stringent requirements.  |

Source: *Development Document for Interim Final Effluent Limitations Guidelines and Proposed New Source Performance Standards for the Oil and Gas Extraction Point Source Category* (U.S. EPA, 1976).

<sup>a</sup>No pollutants are regulated in Subparts F or G.

### 6.1.1 CBM Extraction as a Potential New Subcategory of the Oil and Gas Extraction Category

EPA considers CBM extraction a potential new subcategory of the Oil and Gas Extraction Category. First, the product extracted by the CBM industry – coal bed natural gas<sup>10</sup> – is virtually identical to the conventional natural gas extracted by facilities subject to the Oil and Gas Extraction ELGs, both of which consist largely of methane. Reflecting this similarity in product, both CBM operations and conventional oil and gas extraction operations fall within SIC code 1311: Crude Petroleum and Natural Gas. CBM operations simply constitute another process for extracting natural gas, and are therefore reasonably considered part of the Oil and Gas Extraction Category.

<sup>10</sup> Coal bed methane (CBM) is also referred to as coal bed natural gas (CBNG or CNG). Prior to refining, extracted natural gas typically consists of methane (approximately 95 percent), ethane (approximately 2.5 percent), and other gases such as propane, butane, pentane, nitrogen, and carbon dioxide (EIA, 2006a).

EPA also considered whether CBM extraction could be considered a potential subcategory of the Coal Mining Category. However, the product produced by coal mining – a solid mineral – is entirely different from the product produced by CBM extraction – a natural gas. *Cf. Amoco Prod. Co. v. S. Ute Indian Tribe*, 526 U.S. 865, 887 (finding that the term “coal” in the Coal Lands Act did not encompass the CBM gas because Congress likely “viewed the extraction of CBM gas as drilling for natural gas, not mining coal.”). Therefore, EPA does not believe that the CBM industry is appropriately considered a potential new subcategory of the Coal Mining Category.

### **6.1.2 CBM Industry Current Permitting Practices**

Produced water from CBM is a pollutant subject to regulation under the CWA. See *Northern Plains Resource Council v. Fidelity Exploration and Development Co.*, 325 F.3d 1155 (9th Cir. 2003). Although EPA considers CBM to be a potential new subcategory of the Oil and Gas Extraction Category, the ELGs for this category does not currently apply to CBM discharges. Therefore, because the discharge of produced water from CBM extraction is not subject to an existing ELG, permit writers must develop technology-based limits on a case-by-case basis using their BPJ. See 40 CFR 122.44(a)(1). In developing the BPJ-based limits, the permit writer must take into account the same statutory factors EPA would use in promulgating a national categorical ELG, as they apply to the particular facility. See 40 CFR 125.3(d).

Currently there exists a wide range of regulatory controls for CBM-produced waters that vary from state to state and permit to permit. Permit writers often model permit limits on ELGs for industries considered similar to CBM, which has led to inconsistencies among permits. One inconsistency is that the permitting authorities of CBM wells in eastern states do not use the Oil and Gas Extraction ELGs. These ELGs prohibit the discharge of produced waters east of the 98<sup>th</sup> meridian. See 40 CFR Part 435.32 and 435.52. Rather, permit writers east of the 98<sup>th</sup> meridian rely on the Coal Mining ELGs, which allow discharge of treated wastewater to surface waters (Veil, 2002). Those in western states (west of the 98<sup>th</sup> meridian) have modeled their BPJ permit limits on the Agricultural and Wildlife Water Use Subcategory of the Oil and Gas Extraction ELGs (Subpart E, 40 CFR Part 435), which allows the discharge of some produced waters. Onshore facilities regulated by the Oil and Gas Extraction ELGs must meet the following conditions in order to discharge produced water:

- The produced water must be generated from facilities that are engaged in production, drilling, well completion, and well treatment in the oil and gas extraction industry and be located in the continental United States and west of the 98<sup>th</sup> meridian (40 CFR 435.50);
- The produced water must be used in agriculture or wildlife propagation when discharged into navigable waters (40 CFR 435.50); and
- The produced water discharges must not exceed an oil and grease daily maximum limitation of 35 mg/L (40 CFR 435.52(b)).

EPA also defined the term “use in agricultural or wildlife propagation” to mean that “the produced water is of good enough quality to be used for wildlife or livestock watering or other agricultural uses and that the produced water is actually put to such use during periods of discharge.” [Emphasis added]. See 40 CFR 435.51(c).

## **6.2 Summary of Comments Received Regarding the Coal Bed Methane Industry**

EPA received comments on the 2005 annual review from the Tongue River Water Users’ Association and Natural Resources Defense Council (NRDC), both requesting development of ELGs to regulate CBM-produced water discharge. Specifically, the Tongue River Water Users’ Association requested protection of the Tongue River’s existing sodium levels so that it can continue to be used for irrigation (EPA-HQ-OW-2004-0032-1048). NRDC cited the need for consistent, national regulations instead of state-determined permitting based on BPJ (EPA-HQ-OW-2004-0032-1090). Additionally, Cook Inlet Keeper commented on the 2003 annual review that EPA should expand its examination of available data on the impacts of CBM-produced water discharges (EPA-HQ-OW-2003-0074-0735).

In addition to considering these public comments, EPA collected information related to four factors of CBM-produced water discharges:

- Factor 1: the amount and type of pollutants in an industrial category’s discharge, and the relative hazard posed by that discharge.
- Factor 2: the performance and cost of applicable and demonstrated wastewater treatment technologies, process changes, or pollution prevention alternatives that could effectively reduce the pollutants in the industrial category’s wastewater.
- Factor 3: the affordability or economic achievability of any technology identified using the second factor.
- Factor 4: the opportunity to eliminate inefficiencies or impediments to pollution prevention or technological innovation, or opportunities to promote innovative approaches such as water quality trading, including within-plant trading.

EPA’s analysis of the CBM industrial sector using these four factors is summarized in this section and in the record supporting the 2006 Plan (Johnston, 2006).

### **6.3            CBM Industry Profile**

EPA obtained data on the number of CBM operations in the United States from the Energy Information Administration (EIA) and oil and gas industry trade groups. Table 6-2 presents the current and potential U.S. sources of CBM, listed by coal basin. Figure 6-1 indicates the location of the key CBM basins in the United States. The EIA recorded that, in 2004, CBM production (1.72 trillion cubic feet, tcf) and proved reserves (18.4 tcf) accounted for approximately 8.7 and 9.6 percent, respectively, of the total U.S. natural gas production and reserve capacity (EIA, 2006a).

#### **6.3.1            Data on CBM-Produced Water Discharges**

Table 6-2 also indicates if EPA has documented water discharges from the listed CBM basin. Although CBM-produced water can be disposed of through evaporation/infiltration impoundments, stock watering ponds, irrigation, and injection, some CBM operators discharge to surface waters. EPA collected available information on surface discharges in the Black Warrior Basin in Alabama and the Powder River Basin (primarily in Wyoming), such as by searching state NPDES permit databases by type of facility. In the Black Warrior Basin, most operators discharge to surface water, such as the Black Warrior River, although some operators inject produced water with high total dissolved solids (TDS). In Wyoming in general, surface discharge is a predominant water disposal method. Wyoming issued over 4,000 NPDES permits for the discharge of CBM-produced water (WDEQ, 2006). In the much smaller Montana portion of the Powder River Basin, EPA identified one NPDES permit (for 13 outfalls) allowing surface discharge of CBM-produced water (MDEQ, 2001).

The New Mexico Oil Conservation Division estimates that approximately 95 percent of produced water from the San Juan and Raton basins is injected, with the other 5 percent stored in impoundments (NMOCD, 2004). The impoundments may or may not discharge, with any discharge likely in the New Mexico portion of the Raton Basin (U.S. EPA, 2004). EPA identified at least 12 NPDES permits allowing CBM-produced water discharge in Colorado (Veil, 2002). In the other major commercial basins, operators typically do not discharge produced water. EPA also observed a number of CBM-produced water management practices (ERG, 2006a; ERG, 2006b).

In the 2007 and 2008 annual reviews, EPA will collect more information on the volume and pollutant characteristics of CBM-produced water discharges for the different CBM basins and formations.

**Table 6-2. United States CBM Sources and Production**

| CBM Basin Name                    | Location (States)          | Development Status       | Number of Producing Wells | Total CBM Production <sup>a</sup> (bcf) | Potential CBM Production (tcf) | EPA Documented CBM-Produced Water Discharge                              |
|-----------------------------------|----------------------------|--------------------------|---------------------------|---|--------------------------------|--|
| Arkoma-Cherokee                   | AR, MO, NE, OK             | Commercial Production    | 1,350                     | 90                                      | 5                              | Unknown  |
| Black Warrior                     | AL, MS                     | Commercial Production    | 3,500                     | 1,418                                   | 4                              | Surface Water Discharge Identified                                       |
| Central and Northern Appalachian  | KY, MD, OH, PA, TN, VA, WV | Commercial Production    | ~2,000                    | 437                                     | 13                             | Unknown  |
| Greater Green River               | CO, WY                     | Exploratory <sup>b</sup> | 200                       | 2                                       | 2.5                            | Unknown  |
| Gulf Coast                        | AL, AR, LA, MS, TX         | Exploratory <sup>b</sup> | ~20                       | <1                                      | 3                              | Unknown  |
| Hanna-Carbon                      | WY                         | Exploratory <sup>b</sup> | NA                        | <1                                      | 6                              | Unknown  |
| Powder River                      | MT, WY                     | Commercial Production    | 15,455 <sup>c</sup>       | 878                                     | 27                             | Surface Water Discharge Identified                                       |
| Raton                             | CO, NM                     | Commercial Production    | Several hundred           | 139                                     | 4                              | Limited Surface Water Discharge Identified (12 NPDES Permits Identified) |
| San Juan                          | CO, NM                     | Commercial Production    | 3,100 <sup>d</sup>        | 9,464                                   | 10                             | Unknown  |
| Uinta-Piceance                    | CO, UT                     | Commercial Production    | >200 <sup>e</sup>         | 452                                     | 6                              | Unknown  |
| Wind River                        | WY                         | Exploratory <sup>b</sup> | NA                        | <1                                      | 2.5                            | Unknown  |
| All Other CBM Basins <sup>f</sup> |                            |                          | NA                        | 80.3                                    |                                | Unknown  |
| <b>Total CBM Production</b>       |                            |                          | <b>&gt;26,000</b>         | <b>12,901</b>                           | <b>163</b>                     |  |

Sources: *Handbook on Coal Bed Methane Produced Water* (ALL, 2003); *CBM in the U.S. – Past, Present, and Future* (EIA, 2004); *U.S. Lowers-48 Coal and Coalbed Resources* (GTI, 2000); *Coalbed Methane Wells in the Powder River Basin* (WOGCC, 2005); *Number of Wells in Black Warrior Basin* (OGB, 2006); *Coalbed Methane Permits* (WDEQ, 2006).

<sup>a</sup>Production volume cumulative through December 31, 2002.

<sup>b</sup>Exploratory indicates that the basin may have some gas sales, but the main activity is still exploratory.

<sup>c</sup>Includes wells in Wyoming portion of Powder River Basin only.

<sup>d</sup>In 2000.

<sup>e</sup>Includes Uinta wells only.

<sup>f</sup>Includes CBM reserves in Alaska and the Illinois Basin.

NA – Not applicable; production has not begun in this basin yet.

6-7

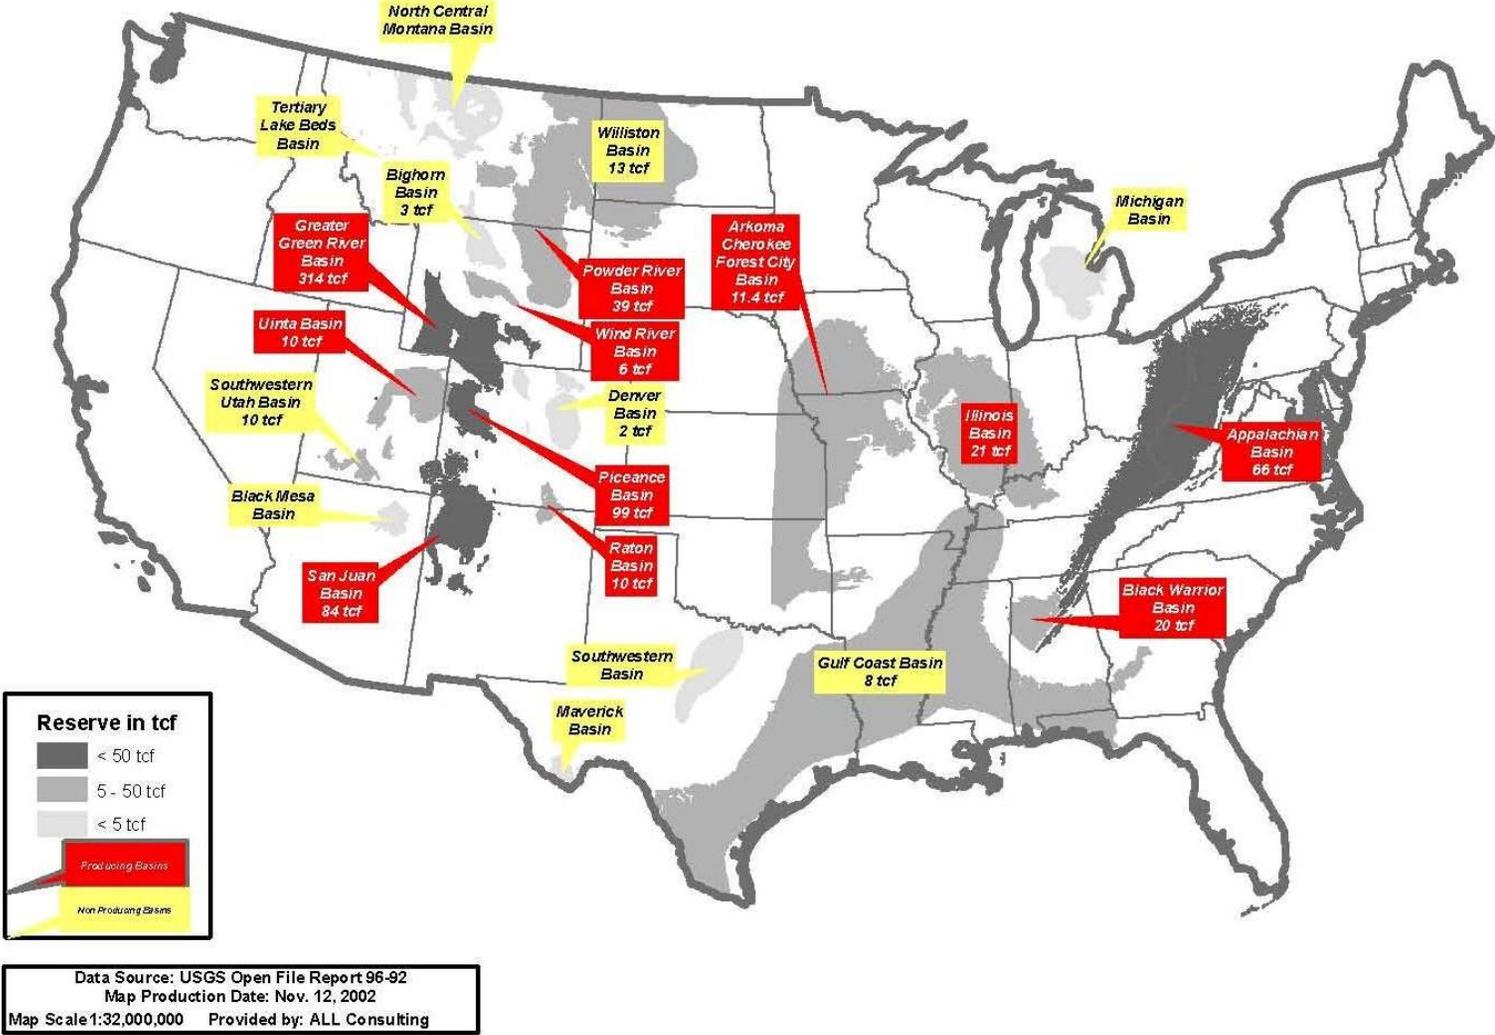


Figure 6-1. Coal Bed Methane Basins in the United States (ALL, 2003)

### **6.3.2 Future CBM Basin Exploration**

Most of the basins listed in Table 6-1 under “all other CBM basins,” have not yet been extensively explored and are not expected to have substantial commercial potential, except Alaska. Alaska, which is included in the “all other basins” category, has potentially enormous reserves coupled with numerous development issues. Alaskan reserves may contain as high as one quadrillion cubic feet of gas in 13 basins, but the economically recoverable portion has yet to be determined (ALL, 2003). Alaskan CBM basins may not be exploited due to lack of data, lack of infrastructure, and high exploration costs (ALL, 2003). However, CBM-produced water in Alaska would be similar to water from other CBM basins: produced in large quantities, saline, and possibly containing other pollutants such as metals (Northern Alaska Environmental Center, 2006).

Future CBM Basin exploration may be linked to the ability to manage and dispose of CBM-produced waters. For example, “after a decade of steady growth in the number of [CBM] wells and [CBM] gas production in the Powder River Basin (including dramatic growth from 1998 to 2003), production dropped about 5 percent from 2003 to 2004...[A]ccording to industry representatives, this reduction was apparently due in part to difficulties in managing and disposing of [CBM-produced] water. Partly as a consequence of these difficulties, industry is now considering other disposal options including injection and more expensive water treatment methods. But if difficulties in disposing and/or permitting [CBM-produced] water discharges were, in fact, the root causes of reduced production in 2004, additional acceptable options for managing the water will be needed or production may continue to level off or decline” (Ruckelshaus, 2005).

### **6.4 Oil and Gas Extraction Category 2005 Annual Review**

For the 2005 annual review of this category, EPA used available industry, state, and EPA literature but did not use PCS or TRI data. EPA selected the Oil and Gas Extraction Category for further review because of comments received on the Preliminary 2006 Plan and changes in the CBM portion of the oil and gas industry. The PCS and TRI databases classify data by SIC codes, which do not distinguish CBM production from traditional oil and natural gas recovery. Therefore, the 2005 screening-level review of PCS and TRI data did not provide insight into discharges associated with CBM.

### **6.5 CBM Production**

The geologic process that progressively converts plant material to coal (coalification) generates large quantities of natural gas that are stored in the coal seams. The natural gas consists of approximately 96 percent methane, 3.5 percent nitrogen, and trace amounts of carbon dioxide (U.S. EPA, 2004). The natural gas contained in and removed from the coal seams is called CBM. The increased pressures from water in the coal seams force the natural gas to adsorb to the coal (U.S. DOE, 2006).

The softest coals (peats and lignites) are associated with high porosity, high water content, and biogenic methane. In higher rank coals (bituminous), porosity, water, and biogenic methane production decreases, but the heat associated with the higher rank coals breaks down the more complex organics to produce methane. The hardest anthracite coals are associated with

---


low porosity, low water content, and little methane generation (ALL, 2003). The most sought-after coal formations for CBM development, therefore, tend to be mid-rank bituminous coals. Coal formations in the eastern United States tend to be higher rank, with lower water content than western coal formations. They also tend to have greater methane content per ton of coal than western coal formations in the key basins, but often require fracturing to release the methane because of their low porosity (ALL, 2003).

To extract CBM, operators drill wells into coal-bearing formations. Often, these formations are not as deep as those containing conventional hydrocarbon reserves, particularly in western regions. In the Powder River Basin, for example, some of the methane-bearing formations are shallow, at hundreds to one thousand feet below land surface, compared to conventional oil and natural gas well depths averaging approximately 6,000 feet (U.S. DOE, 2005). CBM wells can be drilled using water well drilling equipment, not the rigs designed for conventional hydrocarbon extraction, which are used to drill several thousands of feet into typical conventional reservoirs (Apache Corporation, 2006).

CBM wells typically have either openhole or perforated/slotted casing completion, similar to those for conventional oil or gas wells. However, openhole completions, which are less expensive than perforated or slotted completions, are used more for CBM than for conventional oil and gas, which can use them only under certain circumstances (NaturalGas.org, 2004). For example, openhole completion is widely used in Wyoming's Powder River Basin (ALL, 2003). Figure 6-2 shows the profile of a typical western CBM well using openhole completion.

Extraction of CBM requires drilling and pumping the water from the coal seam, similar to typical natural gas production. Methane and water are produced at individual wells and piped to a metering facility, where the amount of production is recorded. The methane then flows to a compressor station, where the gas is compressed and then shipped via pipeline (De Bruin, 2001). As at conventional hydrocarbon production facilities, the produced water then becomes a by-product of the gas extraction process, requiring some form of management (i.e., use or disposal).

Removing the water from the formation is necessary to produce CBM. The water removal from the formation reduces the pressure and allows the CBM to release from the coal to produce flowing natural gas (Wheaton, 2006; U.S. DOE, 2006). Unlike conventional gas extraction, which usually produces relatively small amounts of water (removing water is not necessary to release conventional gas reserves), CBM extraction produces large amounts of water, sometimes saline.

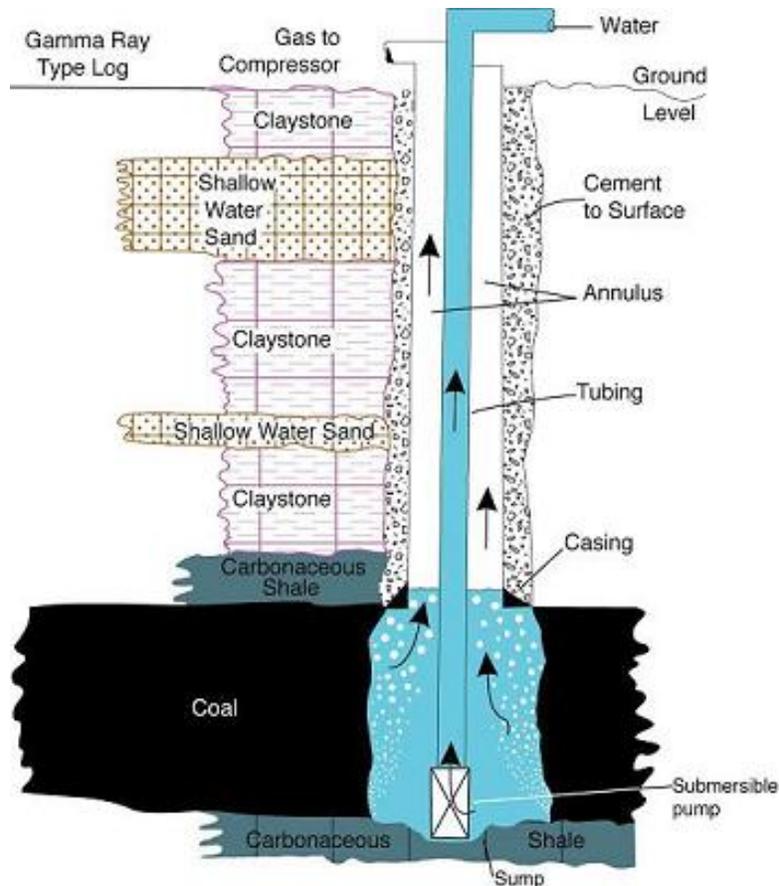

**Figure 6-2. Profile of a Typical Western CBM Well with Openhole Completion (DeBruin, 2001)**

A CBM well's typical lifespan is between 5 and 15 years, with maximum methane production achieved after one to six months of water removal (Horsley & Witten, 2001). CBM wells go through the following production stages:

- Early stage where large amounts of water are produced to reduce the underground pressure, which encourages the release of the natural gas;
- Stable stage where the amount of natural gas produced from the well increases as the amount of water removed from the coal seam decreases; and
- Late stage where the amount of gas produced declines and water production remains low (De Bruin, 2001).

As previously stated, EPA will collect more information on the future exploration of CBM across the United States (e.g., production and number of wells) and the expected timelines for development.

## 6.6 CBM-Produced Water Sources and Characteristics

The production of CBM requires large quantities of water to be removed from under ground (U.S. EPA, 2004). The quantity and quality of CBM-produced water varies between basins, within basins, between coal seams, and over a well's lifetime. Generally, the western basins with their soft coal formations tend to produce more water than the hard-coal eastern basins. Also, basins with a longer production history, such as the San Juan basin, produce less total water and less water per well than the more recently developed basins, such as the Powder River Basin. Table 6-3 presents the amount of water produced in some of the CBM basins. The Powder River Basin produces the most water, overall and per well.

**Table 6-3. Water Production from CBM Extraction**

| Basin Name      | Average Water Production per Well (gal/day) | Yearly Average Water Production per Basin (MGD) |
|-----------------|---|---|
| Arkoma-Cherokee | <900-2,600                                  | ND  |
| Black Warrior   | 1,800                                       | 1,950   |
| Powder River    | 12,600                                      | 12,600  |
| Raton           | 8,380                                       | 1,400   |
| San Juan        | 800   | 900   |
| Uinta           | 6,770                                       | 970   |

Source: *Water Produced with Coal-Bed Methane* (USGS, 2000); *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives* (ALL, 2003).

ND – No data available.

As previously stated, EPA will collect more information on the volume and pollutant characteristics on CBM-produced water discharges for the different CBM basins and formations.

### 6.6.1 CBM-Produced Water Pollutants of Concern

Total dissolved solids (TDS) is the major pollutant of concern for CBM-produced water. TDS includes any dissolved minerals, salts, metals, cations, or anions in water. TDS concentrations in CBM-produced water generally range from 200 mg/L to 4,000 mg/L in the western United States and from 500 to 27,000 mg/L in the eastern United States, with occasional concentrations exceeding 50,000 mg/L. For comparison, 500 mg/L TDS is recommended for potable water and 1,000 to 2,000 mg/L TDS is recommended for irrigation and stock ponds (USGS, 2000). Table 6-4 presents TDS concentrations for the major CBM basins.

**Table 6-4. CBM-Produced Water TDS Concentrations**

| Basin           | Minimum TDS Concentration (mg/L) | Maximum TDS Concentration (mg/L) |
|-----------------|----------------------------------|----------------------------------|
| Appalachian     | <10,000                          | >10,000 (>1%)                    |
| Arkoma-Cherokee | ND                               | 90,000 (9.0%)                    |
| Black Warrior   | <50                              | 60,000 (0.06%)                   |
| Green River     | ND                               | >10,000                          |
| Piceance        | 1,000                            | 6,000                            |
| Powder River    | 244                              | 8,000 <sup>a</sup> (0.81%)       |
| Raton           | 310                              | >3,500 (0.35%)                   |
| San Juan        | 180                              | 171,000 (1.7%)                   |
| Uinta           | 6,350                            | 42,700 (4.3%)                    |
| Wind River      | 2,000                            | 11,000                           |

Source: *Technical Support Document for the 2004 Effluent Guidelines Program Plan* (U.S. EPA, 2004); *Guidance for Developing Technology-Based Limits for Coalbed Methane Operations: Economic Analysis of the Powder River Basin* (U.S. EPA, 2003); Proceedings from the Produced Water Forum in Farmington, NM (NMOCD, 2004); *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives* (ALL, 2003); Analysis of Discharge Data for Six Industry Categories (Bartram, 2003).

<sup>a</sup>Typical maximum TDS concentrations are approximately 8,000 mg/L; however, concentrations as high as 50,000 mg/L have been measured.

TDS – Total dissolved solids.

ND – No data available.

CBM-produced water may also contain trace amounts of metals, volatile and semivolatile organic compounds, polymers, surfactants, biocides, iron-chelating agents, and other compounds associated with drilling and production (Bartram, 2003). Table 6-5 presents the pollutant concentrations from basins that account for approximately 96 percent of the 2002 U.S. production.

There is very limited discharge monitoring information in PCS and TRI for this industrial sector. In the 2007 and 2008 annual reviews, EPA will collect more information on the pollutants of concern in CBM-produced waters across the different CBM basins and formations.

### **6.6.2 Adverse Impacts from CBM-Produced Water Discharges**

CBM-produced water discharges can adversely impact the receiving surface water and soil. Saline discharges affect streams' aquatic and benthic life and can damage streams used to irrigate farmland or water livestock (Johnston, 2006). The large volume of water discharged can also cause stream bank erosion and salt deposition, creating hardpan soil. Long-term impacts include sodium buildup, reduction of plant diversity, mobilization of salts and other elements, and alteration of surface and subsurface hydrology (Ruckelshaus, 2005). In addition, removing large quantities of CBM-produced water can lower aquifers used for drinking water (Horsley & Witten, 2001).

**Table 6-5. Concentration of Pollutants in CBM-Produced Water by Basin**

| Pollutant | Pollutant Concentration by Basin (mg/L) |       |                     |        |                    |       |             |     |             |        |
|-----------|---|-------|---------------------|--------|--------------------|-------|-------------|-----|-------------|--------|
|           | San Juan Basin                          |       | Black Warrior Basin |        | Powder River Basin |       | Raton Basin |     | Uinta Basin |        |
|           | Min                                     | Max   | Min                 | Max    | Min                | Max   | Min         | Max | Min         | Max    |
| Barium    | 0.7                                     | 63    | ND                  | ND     | 0.06               | 2     | ND          | ND  | ND          | ND     |
| Calcium   | 0                                       | 228   | ND                  | ND     | 5                  | 200   | 4           | 24  | ND          | ND     |
| Chloride  | 0                                       | 2,350 | 40                  | 36,000 | 3                  | 119   | 15          | 719 | 2,300       | 14,000 |
| Iron      | 0                                       | 228   | 0.1                 | 400    | 0.03               | 11    | 0.1         | 23  | ND          | ND     |
| Magnesium | 0                                       | 90    | ND                  | ND     | 1                  | 52    | 1           | 8   | ND          | ND     |
| Potassium | 0.6                                     | 770   | ND                  | ND     | 2                  | 20    | 1           | 17  | ND          | ND     |
| Sodium    | 19                                      | 7,130 | 60                  | 21,500 | 89                 | 800   | 210         | 991 | ND          | ND     |
| Sulfate   | 0                                       | 2,300 | 1                   | 1,350  | 0.01               | 1,170 | 1           | 204 | ND          | ND     |

Source: Analysis of Discharge Data for Six Industry Categories (Bartram, 2003).

Min – Minimum.

Max – Maximum.

ND – No data available.

Aquatic communities can be adversely impacted (e.g., decrease in species diversity and density) by the constituents in CBM-produced waters (e.g., TDS, bicarbonate, chloride, metals, organics) (Mount, 1997; Tietge, 1997; Mount, 1993a). CBM discharges may adversely impact water quality and aquatic organisms. For example, soil colloids suspended in runoff may sorb and mobilize metals, soil nutrients, pesticides and other organic contaminants (Sumner, 1998). Also, the ions that comprise TDS (e.g., chloride) can be toxic to freshwater organisms if present in sufficiently high concentrations (Mount, 1992; Mount, 1993b, Klarich, 1980; Boelter, Unknown; Horpestad, 2001). Some macroinvertebrates in freshwater systems appear to be quite sensitive to increasing TDS concentrations. Sensitivity will vary with the species of aquatic organism and the ionic composition of the TDS. As in-stream TDS concentrations increase, sensitive aquatic species are eliminated while more TDS-tolerant species increase in abundance. Thus, while the overall abundance of macroinvertebrates may not change, the diversity, or taxa richness, of the aquatic community may change.

In the 2007 and 2008 annual reviews, EPA will collect more information on the potential adverse environmental impacts from the discharge of CBM-produced waters across the different CBM basins.

## **6.7 CBM-Produced Water Treatment and Disposal**

This subsection describes existing CBM-produced water management: surface water discharge, evaporation or storage ponds using impoundments, and subsurface injection. It also describes treatment technologies associated with produced water management and lists technologies that could allow beneficial use of CBM-produced water. Table 6-6 indicates the predominant disposal methods currently used in most of the major CBM basins.

**Table 6-6. Produced Water Disposal Methods in Major CBM Basins**

| Basin           | Predominant Disposal Method           | Other Methods Noted                    |
|-----------------|---------------------------------------|--|
| Black Warrior   | Surface water discharge               | Injection                              |
| Appalachian     | Injection                             |  |
| Powder River    | Surface water discharge, impoundments | Injection, irrigation, aquifer storage |
| Uinta-Piceance  | Injection                             | Evaporation impoundments               |
| Raton           | Injection                             | Impoundments, surface discharge        |
| San Juan        | Injection                             |  |
| Arkoma-Cherokee | Injection                             | Hauling to commercial disposal         |

Source: *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives* (ALL, 2003); *Guidance for Developing Technology-Based Limits for Coalbed Methane Operations: Economic Analysis of the Powder River Basin* (U.S. EPA, 2003); *Water Produced with Coal-Bed Methane* (USGS, 2000); *Regulatory Issues Affecting Management of Produced Water from Coal Bed Methane Wells* (Veil, 2002).

In the 2007 and 2008 annual reviews, EPA will collect more information on the produced water treatment and disposal methods across the different CBM basins and formations.

### 6.7.1 Surface Discharge of CBM-Produced Water

Of all U.S. CBM basins, surface water discharge is most prevalent in the Black Warrior, Powder River, and Raton Basins. Surface discharge occurs rarely, if at all, in the other major commercial basins.

In one case study presented in the *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives*, an operation in the Black Warrior Basin discharges to a treatment pond, where the pH is adjusted to precipitate metals (ALL, 2003). The water is then discharged at a controlled rate to the Black Warrior River. The facility's NPDES permit limits the rate of discharge and also limits the in-stream TDS concentration to less than 230 mg/L. The permit does not specify whether the treatment pond must be lined.

Operators typically transport CBM-produced water to the discharge location via buried pipelines. Prior to discharge, facilities often use aeration methods to precipitate iron from the water to reduce or eliminate staining in the stream beds and preserve the aesthetic quality of the receiving stream. Water typically flows over rip-rap before entering the stream bed to reduce erosion and further precipitate iron from the water. Operators may also use spray nozzles, agitators, and bubble diffusers to aerate the water before discharge.

### 6.7.2 Storage/Evaporation Ponds for CBM-Produced Water

Many CBM operators in the Powder River Basin use unlined earthen storage ponds for evaporation and infiltration in conjunction with or instead of surface discharge to minimize or eliminate the amount of water reaching outfalls to surface water. Ponds also can be used for livestock watering. They are typically an excavated rectangular pit with sloped sides and perimeter berms. Water is eliminated via infiltration, evaporation, or transport to irrigated

cropland and pastureland without return flows to drainages (Oil & Gas Consulting, 2002). Evaporation rates depend on the size of the pond and its location. In semiarid regions such as Wyoming, hot dry air moving from land over a water body will cause faster evaporation for smaller water bodies (Pochop, 1985).

Two types of storage ponds are used: in-channel and off-channel. In-channel ponds are located within an existing drainage basin, including all perennial, intermittent, and ephemeral defined drainages, lakes, reservoirs, and wetlands. Off-channel ponds are located on upland areas, outside of natural drainages and alluvial deposits associated with these natural drainages (Pochop, 1985; U.S. EPA, 2003). Most of the storage ponds in the Powder River Basin are off-channel and are designed to contain all CBM-produced water without discharge (Oil & Gas Consulting, 2002; U.S. EPA, 2003).

### **6.7.3 Injection of CBM-Produced Water**

CBM operators can eliminate all surface water discharge of produced water through underground injection. Prior to the major development of the Powder River Basin, injection of produced water into Underground Injection Control (UIC) Class II wells was the predominant (greater than 90 percent by volume) form of CBM-produced water management in the continental United States (Lawrence, 1993). UIC Class II wells are regulated under the federal Safe Drinking Water Act by EPA or EPA-approved state UIC programs and are used to inject fluids associated with the production of oil and natural gas. Operators can inject water with high TDS into UIC Class II wells without treatment, which cuts down on water management costs.

Operators install wells by either drilling a new hole or by converting an existing well such as marginal oil-producing wells, plugged and abandoned wells, and wells that were never completed (dry holes). Some operational difficulties of injecting CBM-produced water include formation plugging and scaling, formation swelling, corrosion, and incompatibility of injected produced waters with receiving formation fluids. In general, these issues can be avoided or remedied by using engineering and operational applications such as treatment chemicals (U.S. EPA, 1996).

An advantage of using UIC Class II injection wells to dispose of CBM-produced water is that the injected water is usually better quality, having lower TDS concentrations, than the water in the injection zone. If the well is properly designed, maintained, and operated, there is little risk of ground-water contamination from produced water. A potential disadvantage of using Class II injection wells is the possible need for pretreatment to prevent plugging of the injection well. It is also necessary to periodically clean crusted material from the injection well perforations. Well cleanings require temporary suspension of injection operations, and nearby temporary storage or alternative disposal techniques until injection resumes (Zimpher, 1988).

Pretreatment may include removing iron and manganese by precipitation. Iron and manganese form oxides upon exposure to air, which may clog the well. Settling tanks with splash plates are used to aerate the produced water, which will oxidize iron and manganese to insoluble forms that can precipitate in the tank. The water can then be injected. Biocides may also be added to the produced water prior to injection to control biological fouling.

#### 6.7.4 Hauling with Commercial Disposal of CBM-Produced Water

For CBM operations where produced water generation is low, produced water may be stored in tanks, which are later hauled to a commercial disposal well. This option is noted in one case study (ALL, 2003) of an operation in the Arkoma basin where the wells are producing just a few gallons to not more than 400 gallons per day of water.

#### 6.7.5 Technology Options for Beneficial Use and Disposal of CBM-Produced Water

Various treatment technologies reduce or eliminate pollutants of concern and allow for the beneficial use of CBM-produced water or for surface water disposal. Table 6-7 lists technologies that could be used to treat CBM-produced water for beneficial use.

**Table 6-7. Potential Treatment Technologies for Beneficial Use and Disposal for CBM-Produced Water**

| Treatment Technology and Description   | Potential CBM Application   |
|--|---|
| Aeration/oxidation: use of spray nozzles, educators, bubble diffusers, or aerators to oxygenate water                          | Precipitates iron.  |
| Reverse osmosis: pressure-driven membrane separation process   | Removes sodium, chlorides, minerals, and other pollutants. Fouls if influent water contains particulates. |
| Ion exchange: cation or anion resin removal process  | Removes ionic pollutants: sodium, chlorides, sulfate, metals.   |
| Electrodialysis: electrical current with membrane separation process   | Removes ionic pollutants: sodium, chlorides, sulfate, metals.   |
| Chemical precipitation: addition of chemical to form metal hydroxides and subsequent precipitation of the insoluble hydroxides | Removes metals.   |
| Downhole gas/water separation: separation of CBM from water without pumping water above ground.                                | Pollution prevention: decreases or eliminates CBM-produced water volume.                                  |
| Freeze-thaw/evaporation: crystallization process   | Reduces salinity.   |
| Harmon SO <sub>2</sub> generator   | Removes sulfur, increases acidity, reduces salt formation in soils receiving CBM-produced water.          |
| Constructed wetlands   | Removes metals.   |
| Evaporation pond liners: barrier technology  | Prevents infiltration of water and encourages evaporation.  |

Source: *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives* (ALL, 2003).

The CBM-produced waters can also be applied in agronomic rates to agricultural lands (U.S. EPA, 2006). This leads to no direct discharges of CBM-produced waters (i.e., zero discharge). Soil samples are periodically analyzed to ensure that the application of CBM-produced waters will not cause plugging or dispersal (and subsequent erosion) of the soil structure. Analytes include sodium adsorption ratio (SAR), electrical conductivity (EC), pH, and soil moisture, which help confirm the movement of water through the soil profile. Complete soil chemistry and hydraulic properties are also analyzed and review on a periodic basis. An

overview of an agricultural use of CBM-produced waters is provided in Chapter 6 (Case Studies) of the *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives* (ALL, 2003).

### **6.8 Cost and Affordability of Treatment Technologies for CBM-Produced Water**

EPA developed capital and operating costs associated with the CBM-produced water disposal and treatment methods. EPA estimated fixed costs and annual operating and maintenance costs based on equipment and land needs, for a range of produced water flows. Unit component costs were based on standard cost references, vendors, and industry contacts and are expressed in 2004 dollars. Table 6-8 shows the annualized costs estimated for treating CBM-produced water, considering capital and operating costs over lifetime water production.

**Table 6-8. 2006 Estimates of Annualized Costs for Managing CBM-Produced Water in the Powder River Basin**

| <b>Water Management Option</b>                          | <b>Estimated Annualized \$/bbl</b> |
|---|------------------------------------|
| Surface discharge after reverse osmosis or ion exchange | \$0.15 to \$0.51                   |
| Zero discharge using injection or reinjection           | \$0.15 to \$1.89                   |
| Zero discharge using impoundments                       | \$0.06 to \$0.07                   |
| Surface discharge (without treatment)                   | \$0.03 to \$0.05                   |

Source: Computation of Lifetime per Barrel Costs of Disposal for Coal Bed Methane-Produced Water in the Powder River Basin (Jones, 2006).

After estimating treatment technology costs in 2003, EPA evaluated their affordability in an economic impact model of CBM production in the Powder River Basin. The economic analysis uses a financial model based on a discounted cash-flow approach that EPA has used for the economic analyses of several oil and gas industry-related effluent guidelines. The general approach uses a number of model projects that are specified on the basis of gas and water production volumes. Data and assumptions about costs of gas production, royalty and severance tax rates, price of gas, costs of project construction, number of wells per project, and other information are used to estimate costs. EPA used costs of CBM-produced water treatment and disposal in the model to prepare a number of scenarios, including a baseline (current practice) scenario against which all other scenarios are compared.

EPA's 2003 study focused on the Powder River Basin, which has some of the highest water production rates of any basin in the United States. At the time of the study, wellhead gas prices were greater than \$2.50 per mcf, and EPA's analysis showed that many of the technology options were affordable, including injection (which is one of the more expensive options). DOE projects that future wellhead gas prices in the Powder River Basin will be significantly greater than \$2.50-\$3.00 per mcf, which indicates that the treatment technology options would continue to be affordable. Also, some of the beneficial use options might also be affordable in basins where water is currently injected, but where beneficial use opportunities are welcome.

Table 6-9 lists the types of treatment and disposal technologies evaluated in the Powder River Basin study and EPA’s findings on their affordability. In the 2007 and 2008 annual reviews, EPA will collect more information on the treatment costs for the CBM-produced waters across the different CBM basins and formations.


**6.9 CBM Industry Trends**

This subsection discusses the trends seen in the U.S. energy market and the U.S. CBM business market.

In the 2007 and 2008 annual reviews, EPA will collect more information on the energy market trends with respect to the CBM industrial sector for the different CBM basins and formations.

**6.9.1 Energy Market Trends**

DOE projects that unconventional gas production, which includes CBM production, will become the largest source of domestic natural gas production over the next 25 years, as shown in Figure 6-3. The EIA projects CBM production to increase from 1.7 tcf per year (current) to 8.1 tcf per year (2015) and 9.1 tcf per year (2025) (EIA, 2006c). Currently, proved reserves of CBM are estimated to total 18.4 tcf, but technically recoverable reserves are higher. Recent estimates by DOE set this number at 75 tcf (McAllister, 2006). Most of these reserves are expected in the Rocky Mountain region, and much of this is associated with Powder River Basin.

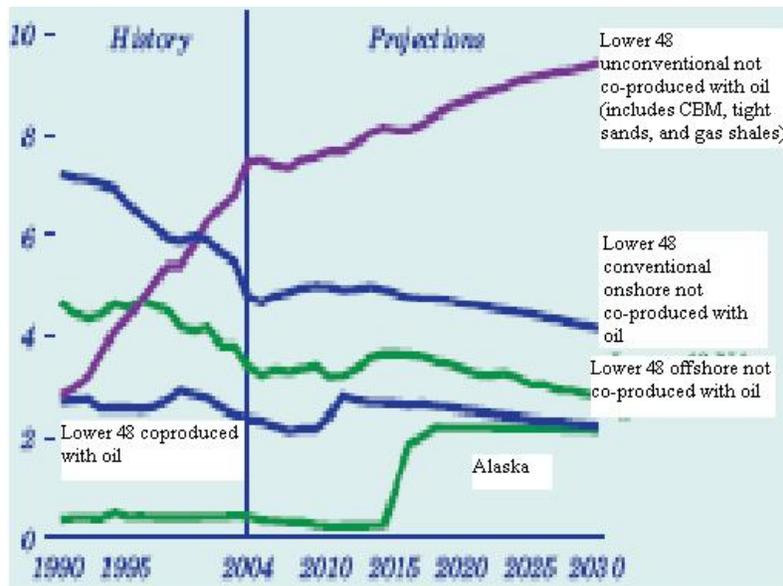

**Figure 6-3. EIA Predicted Natural Gas Production by Source, 1990-2030 (tcf) (EIA, 2006c)**

**Table 6-9. 2003 Estimates of Cost and Affordability of Treatment and Disposal Technologies for CBM-Produced Water in the Powder River Basin**

| Technology Evaluated                 | Summary of Engineering Considerations   | Estimated Cost                   |                         | Conclusion Regarding Affordability   |
|--------------------------------------|---|----------------------------------|-------------------------|--|
|                                      |   | Capital Cost/Well Served (\$000) | Operating Cost (\$/bbl) |  |
| Surface Discharge                    | Piping, rip-rap, outfall structure  | ~\$10                            | ≤\$0.01                 | Surface discharge costs (as the lowest cost technology) were considered the baseline against which other options are compared. |
| Zero Discharge via Storage Ponds     | Piping, excavation and construction, surface runoff control, rip-rap, land  | ~\$19                            | ≤\$0.01                 | Affordable over most gas prices modeled (i.e., production changes little from baseline).                                       |
| Reverse Osmosis                      | Evaluation of cost to treat a portion of CBM-produced water with reverse osmosis unit                                   | ~\$46 (one example case)         | \$0.03-\$0.05           | Likely to be affordable at current and projected wellhead gas prices.  |
| Injection: Shallow Well <sup>a</sup> | Injection well construction, piping, tanks and chlorinator, storage tanks, injection pump, equipment building, and land | \$21-\$72                        | \$0.08-\$0.14           | Likely to be affordable at current and projected wellhead gas prices.  |

Source: *Guidance for Developing Technology-Based Limits for Coalbed Methane Operations: Economic Analysis of the Powder River Basin* (U.S. EPA, 2003).

<sup>a</sup>Medium depth and deep injection wells were also investigated, but shallow injection wells are considered the likeliest type of injection well needed in the Powder River Basin.

Drilling activity in the Powder River Basin has been expanding rapidly and is expected to continue to expand substantially over the next decades. According to ALL Consulting, as many as 87,000 wells might be drilled in Wyoming and Montana over the next 10 to 20 years (ALL, 2003). This averages to possibly 4,000 to 6,000 wells per year. In the last year, the Wyoming Oil and Gas Conservation Commission issued nearly 7,000 permits to drill for CBM (WOGCC, 2006).

The increased drilling activity results from increased gas prices, technology advancement, and piping infrastructure. DOE predicts that long-run wellhead gas prices (the price received by the operator of the well) will most likely range from \$4 to \$6/MMBtu,<sup>11</sup> which is more than twice the recent historic levels of about \$2/MMBtu. DOE predicts even higher short-run prices, forecasting an annual average wellhead price of \$7.15/Mcf for 2006, rising to \$8.05/Mcf in 2007 (EIA, 2006b). Also, given that gas prices are twice the recent historic levels, CBM development will expand in basins just beginning the commercial development process.

The wellhead gas prices in the Powder River Basin tend to be slightly less than the average wellhead price due to the distance from the Midwest and Northeast gas demand areas and the relative lack of transmission infrastructure. However, a rapid expansion of infrastructure is expected in the Powder River Basin, which would increase wellhead gas prices for this area. For example, a 2 billion cubic foot per day pipeline is being built to carry gas from Wyoming to Ohio, and several similar projects are also underway (ENR, 2006).

Additionally, new technologies may reduce costs of production as well as increase the amount of reserves that are considered technically recoverable. For example, DOE predicts the possibility that multi-seam completions will allow one well to simultaneously extract methane from several narrow coal seams, lowering the cost of producing from marginally economic or uneconomic coal seams (U.S. DOE, 2005).

The increased drilling and production in the Powder River Basin and possibly other nearby basins increases produced water discharges and environmental impacts. On average, a Powder River Basin CBM well produces 97 bbl water, or over 4,000 gallons per day (WOGCC, 2006). For the Wyoming portion alone, this results in 67 MGD for all wells (WOGCC, 2006). If the expected 4,000 to 6,000 wells come on line annually, there will be an additional 16 to 24 MGD of produced water to be managed in the Powder River Basin. In Wyoming, a majority of the produced water is surface discharged, and the state may need to permit more than 2,000 well discharges each year.

### **6.9.2 Economic Structure of CBM Operations**

CBM operators lease properties for exploration and development. The operator pays for the lease regardless of whether the lease is active. Once the lease produces, the operator also pays the mineral rights owner (who may or may not be the landowner) a royalty, which is typically a percentage of production. The mineral rights owner can be a private party, a state, the Federal Government, or a tribe and varies depending on whether state or federal laws apply (Phelps, Unknown). Western regions have more complex rights ownership on private lands,

---

<sup>11</sup> 1 MMBtu ~ 1 Mcf.

where the landowner, the water rights owner, and the mineral rights owner(s) (the owner of the coal can be different from the owner of the CBM) can all differ.

Facilities that are currently subject to the Oil and Gas Extraction ELGs – many of which also operate CBM extraction facilities – are conventionally divided into independents and “majors,” which are the large, vertically integrated firms with familiar names (e.g., ExxonMobil). Independents are involved only in the “downstream” activities of drilling and producing oil and gas and are not associated with gas distribution, refining, or retail sales. Independents can be either large or small businesses (as defined by the Small Business Administration). Utilities, gas transmission firms, and mining firms might also operate CBM wells (U.S. EPA, 2003).

In the 2007 and 2008 annual reviews, EPA will collect more information on the energy market trends with respect to the CBM industrial sector for the different CBM basins and formations.

### **6.10 CBM Subcategory Conclusions for the 2006 Plan**

In conducting this review, EPA found that it will need to gather more specific information as part of a detailed study of the CBM industry in order to determine whether it would be appropriate to conduct a rulemaking to potentially revise the Oil and Gas Extraction ELGs to include limits for CBM. In particular, EPA needs more detailed information on the characteristics of produced water, as well as the technology options available to address such discharges. To aid in a better industrial profile of the CBM sector, EPA intends to submit an ICR to OMB for their review and approval under the Paperwork Reduction Act, 33 U.S.C. 3501, et seq., in the 2007 and 2008 annual reviews. EPA will use this ICR to collect technical and economic information from a wide range of CBM operations (e.g., geographical differences in the characteristics of CBM-produced waters, current regulatory controls, availability and affordability of treatment technology options). In designing this industry survey EPA expects to work closely with CBM industry representatives and other affected stakeholders. EPA solicits comment on the potential scope of this ICR. EPA may also supplement the survey data collection with CBM site visits and produced water sampling.

Survey questionnaires solicit detailed information specific to individual facilities that is used to assess the statutory rulemaking factors, particularly technological and economic achievability of available controls, production processes, and wastewater treatment residuals disposal practices. To develop a useful survey questionnaire, EPA typically selects the methodology it would use for estimating the costs of installing or upgrading pollution control equipment and for financial and economic analyses, and defines the data it would need to conduct these studies. The necessary data for the CBM ICR will include, among other things:

- NPDES permit information and other regulatory controls;
- Information about CBM formations, CBM production levels and produced water characteristics, types of CBM drilling, CBM-produced water treatment and disposal options and practices (including beneficial use);

- The design, capacity, and operation of current CBM-produced water treatment technologies and practices;
- The types, amounts, composition, and destination of CBM-produced waters and wastes generated by the facility and associated costs of treatment, management, and disposal; and
- Detailed facility and well specific economic and financial data, such as statements of production, revenues and net income, assets and liabilities, operating costs and expenses (e.g., depreciation, royalty payments, severance tax payments), and internal rates of return.<sup>12</sup>

### 6.11 CBM Industry References

ALL. 2003. ALL Consulting, LLC. *Handbook on Coal Bed Methane Produced Water: Management and Beneficial Use Alternatives*. (July). Available online at: <http://www.all-llc.com/CBM/pdf/CBMBU/CBM%20BU%20Screen.pdf>. DCN 03451.

Apache Corporation. 2006. *Areas with the Largest Increase in Drilling*. (March). Available online at: [http://www.apachecorp.com/Explore/Explore\\_Features/20060327/Topic\\_Report\\_Areas\\_with\\_the\\_Largest\\_Increase\\_in\\_Drilling/](http://www.apachecorp.com/Explore/Explore_Features/20060327/Topic_Report_Areas_with_the_Largest_Increase_in_Drilling/). DCN 03452.

Bartram, D., et al., 2003. Eastern Research Group, Inc. Memorandum to Carey Johnston, U.S. EPA. “Analysis of Discharge Data for Six Industry Categories.” (September 5). DCN 00258.

Boetler, Ann M. et al. Unknown. Wyoming Water Research Center. Environmental Effects of Saline Oil-field Discharges on Surface Waters. RB93-104. DCN 03424.

De Bruin, R.H. R.M. Lyman, R.W. Jones, and L.W. Cook. 2001. *Coalbed Methane in Wyoming Information Pamphlet 7 (revised)*. Wyoming State Geological Survey. DCN 03070.

EIA. 2004. Energy Information Administration. *CBM in the U.S. – Past, Present, and Future*. (February). Available online at: [http://www.eia.doe.gov/oil\\_gas/rpd/cbmusa2.pdf](http://www.eia.doe.gov/oil_gas/rpd/cbmusa2.pdf). Date accessed: July 13, 2006. DCN 03876.

EIA. 2006a. Energy Information Administration. Natural Gas Gross Withdrawals and Production. Available online at:  
[http://tonto.eia.doe.gov/dnav/ng/ng\\_enr\\_cbm\\_a\\_EPG0\\_r51\\_Bcf\\_a.htm](http://tonto.eia.doe.gov/dnav/ng/ng_enr_cbm_a_EPG0_r51_Bcf_a.htm);  
[http://tonto.eia.doe.gov/dnav/ng/ng\\_enr\\_cbm\\_a\\_EPG0\\_r52\\_Bcf\\_a.htm](http://tonto.eia.doe.gov/dnav/ng/ng_enr_cbm_a_EPG0_r52_Bcf_a.htm);  
[http://tonto.eia.doe.gov/dnav/ng/ng\\_enr\\_sum\\_dcu\\_NUS\\_a.htm](http://tonto.eia.doe.gov/dnav/ng/ng_enr_sum_dcu_NUS_a.htm);  
[http://tonto.eia.doe.gov/dnav/ng/ng\\_prod\\_sum\\_dcu\\_NUS\\_a.htm](http://tonto.eia.doe.gov/dnav/ng/ng_prod_sum_dcu_NUS_a.htm). Date accessed: August 16, 2006. DCN 03468.

---

<sup>12</sup> EPA’s ICR for the 1996 Oil and Gas Extraction Coastal Subcategory ELG rulemaking provides some examples of the economic information EPA will likely collect with the CBM ICR in the 2007 and 2008 annual reviews (U.S. EPA, 2003b).

---

EIA. 2006b. Energy Information Administration. *EIA's Short-Term Energy Outlook* (June). Available online at: <http://www.eia.doe.gov/emeu/steo/pub/jun06.pdf>. DCN 03877.

EIA. 2006c. Energy Information Administration. *Annual Energy Outlook 2006 With Projections to 2030*. (February). DOE/EIA-0383(2006). Available online at: [http://www.eia.doe.gov/oiaf/aeo/pdf/0383\(2006\).pdf](http://www.eia.doe.gov/oiaf/aeo/pdf/0383(2006).pdf). DCN 03414.

ENR. 2006. Engineering News Record. "\$3 Billion Project Planned to Move Rockies Gas East." (February 16). DCN 03582.

ERG. 2006a. Eastern Research Group, Inc. *Final Site Visit Report: Coalbed Methane Landowners and Environmental Impacts, Gillette, WY*. (September 29). DCN 03204.

ERG. 2006b. Eastern Research Group, Inc. *Final Site Visit Report: Coalbed Methane Operators, Gillette, WY*. (September 29). DCN 03205.

GTI. 2000. Gas Technology Institute. *U.S. Lower-48 Coal and Coalbed Resources*. Available online at: <http://www.eandpnet.com/mapscharts/cbm/ustable.html>. Date accessed: July 13, 2006. DCN 03482.

Horpstad, Abe. 2001. Montana Department of Environmental Quality. *Water Quality Analysis of the Effects of CBM Produced Water on Soils, Crop Yields and Aquatic Life*. DCN 03555.

Horsley & Witten, Inc. 2001. "Draft Evaluation of Impacts to Underground Sources of Drinking Water by Hydraulic Fracturing of Coalbed Methane Reservoirs." Prepared for the U.S. EPA. 2001. DCN 03489.

Hulcher, Richard. 2006. Alabama Department of Environmental Management. Email to Carey Johnston, U.S. EPA. "Coal Bed Methane NPDES Permit Questions." (September 11). DCN 03680.

Johnston, Carey A. 2006a. U.S. EPA. Memorandum to Public Record for Effluent Guidelines Program Plan 2005/2006. "Review of Coal Bed Methane for the 2006 Effluent Guidelines Program Plan." (October 25). DCN 02492.

Johnston, Carey A. 2006b. U.S. EPA. Memorandum to Public Record for Effluent Guidelines Program Plan 2005/2006. "Incorporation by Reference: *Sodic Soils*" (November 30). DCN 04113.

Jones, Anne. 2006. Eastern Research Group, Inc. Memorandum to Public Record for Effluent Guidelines Program Plan 2005/2006. "Computation of Lifetime per Barrel Costs of Disposal for Coal Bed Methane-Produced Water in the Powder River Basin." (October 13, 2006). DCN 03881.

Klarich, Duane A. and Stephen M. Regele. 1980. Montana Department of Health and Environmental Sciences. *Structure, General Characteristics, and Salinity Relationships of*

Benthic Macroinvertebrate Associations in Streams Draining the Southern Fort Union Coalfield Region of Southeastern Montana. (November). DCN 03208.

Lawrence, A.W. 1993. Gas Research Institute. “Coalbed Methane Produced-Water Treatment and Disposal Options.” *Quarterly Review of Methane from Coal Seams Technology* 11:2. (December). DCN 01146.

McAllister, Ted. 2006. Energy Information Administration. In: Proceedings from the 2006 EIA Energy Outlook and Modeling Conference. “Unconventional Natural Gas: Industry Savior or Bridge, Unconventional Gas Production Projections in the Annual Energy Outlook 2006: An Overview.” (March 27). Available online at: <http://www.eia.doe.gov/oiaf/aeo/conf/pdf/mccallister.pdf>. DCN 03473.

MBMG. 2003. Montana Bureau of Mines and Geology. *Coal Bed Methane – Frequently Asked Questions*. Available online at: <http://waterquality.montana.edu/docs/methane/cbmfaq.shtml>. Date accessed: July 12, 2006. DCN 03455.

MDEQ. 2001. Montana Department of Environmental Quality. Authorization to Discharge Under the Montana Pollution Discharge Elimination System NPDES – MT0030457 – Fidelity Exploration and Production Company, Decker, MT. Helena, MT. (July 5). DCN 03878.

Mount, David R. et al. 1992. “Use of Laboratory Toxicity Data for Evaluating the Environmental Acceptability of Produced Water Discharge to Surface Waters.” *Produced Water*. DCN 03135.

Mount, David R. et al. 1993a. “Discharge of Coalbed Produced Water to Surface Waters – Assessing, Predicting, and Preventing Ecological Effects.” *Methane from Coal Seams Monthly*. 18-25. (December). DCN 03702.

Mount, David R. et al. 1993b. “Salinity/Toxicity Relationships to Predict the Acute Toxicity of Produced Waters to Freshwater Organisms.” *Society of Petroleum Engineers, Inc.* SPE 26007. DCN 03136.

Mount, David R. et al. 1997. “Statistical Models to Predict the Toxicity of Major Ions to *Ceriodaphnia Dubia*, *Daphina Magna* and *Pimephales Promelas* (Fathead Minnows).” *Environ. Toxicology and Chemistry*. 16:2009-2019. DCN 03063.

NMOCD. 2004. New Mexico Oil Conservation Division. In: Proceedings from the Produced Water Forum in Farmington, NM. (April 1). Available online at: <http://octane.nmt.edu/sw-pttc/proceedings/ProducedWater04Proc/ProceedingsPW.asp>. DCN 03879.

NaturalGas.org. 2004. Well Completion. Available online at: [http://www.naturalgas.org/naturalgas/well\\_completion.asp](http://www.naturalgas.org/naturalgas/well_completion.asp). Date accessed: August 18, 2006. DCN 03476.

Northern Alaska Environmental Center. 2006. *Coal Bed Methane in Alaska*. Available online at: <http://www.northern.org/artman/publish/coalBed.shtml>. DCN 03880.

---

OGB. 2006. Oil and Gas Board. Number of Wells in Black Warrior Basin. Available online at: <http://www.ogb.state.al.us/>. DCN 03981.

O'Farrell, Thomas P., EPA's Industrial Technology Division. Letter to Constance B. Harriman, Steptoe & Johnson. June 1, 1989. OW-2003-0074, DCN 01191.

Oil & Gas Consulting, Inc. 2002. *CBM Producers User Information Survey Results*. (January). DCN 01143. Englewood, CO.

Phelps, Shannon D., James. W. Bauder, Krista E. Pearson. Unknown. Department of Land Resources and Environmental Sciences, Montana State University-Bozeman. *Coal Bed Methane Ownership and Responsibility: A Summary of Surface, Mineral, and Split-Estate Rights*. Available online at: <http://waterquality.montana.edu/docs/methane/splitestate.shtml>. DCN 03004.

Pochop, L., K. Warnaka, J. Borrelli, and V. Hasfurther. 1985. Design Information for Evaporation Ponds in Wyoming. WWRC-85-21. Available online at: [www.wrds.uwyo.edu/library/wrp/85-21/85-21.html](http://www.wrds.uwyo.edu/library/wrp/85-21/85-21.html). DCN 01140.

Ruckelshaus, William. 2005. *Water Production from Coalbed Methane Development in Wyoming: A Summary of Quantity, Quality, and Management Options*. The Ruckelshaus Institute of Environment and Natural Resources. (December). Available online at: <http://www.uwyo.edu/enr/ienr/CBMWaterFinalReportDec2005.pdf>. DCN 03486.

Tietge, Joseph E. et al. "Major Ion Toxicity of Six Produced Waters to Three Freshwater Species: Application of Ion Toxicity Models and Tie Procedures." *Environ. Toxicology and Chemistry*. 16:2002-2008. DCN 03071.

U.S. DOE. 2005. *Crude Oil and Natural Gas Development Wells, 1949-2005*. Available online at: <http://www.eia.doe.gov/emeu/aer/txt/ptb0407.html>. DCN 03459.

U.S. DOE. 2006. *Future Supply and Emerging Resources – Coalbed Natural Gas*. Available online at: [http://www.netl.doe.gov/technologies/oil-gas/FutureSupply/CoalBedNG/CoalBed\\_NG.html](http://www.netl.doe.gov/technologies/oil-gas/FutureSupply/CoalBedNG/CoalBed_NG.html). Date accessed: July 12, 2006. DCN 03480.

U.S. EPA. 1976. *Development Document for Interim Final Effluent Limitations Guidelines and Proposed New Source Performance Standards for the Oil and Gas Extraction Point Source Category*. EPA-440/1-76-055-a. Washington, DC. (September).

U.S. EPA. 1996. *Development Document for Final Effluent Limitations Guidelines and Standards for the Coastal Subcategory of the Oil and Gas Extraction Point Source Category*. EPA-821-R-96-023. Washington, DC. (December).

U.S. EPA. 2003. *Guidance for Developing Technology-Based Limits for Coalbed Methane Operations: Economic Analysis of the Powder River Basin*. Washington, DC. February.

U.S. EPA. 1993. *Coastal Oil and Gas Questionnaire, Parts IV and V, OMB No. 2040-0160*. (July). DCN 04079.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2006. *Coalbed Methane Site Visit Report: July 2006, Powder River Basin, WY*. (November 30). DCN 04110.

USGS. 2000. U.S. Geological Survey. *Water Produced with Coal-Bed Methane*. U.S.G.S. Fact Sheet FS-156-00. (November). DCN 03487.

Veil, John. 2002. Argonne National Laboratory. *Regulatory Issues Affecting Management of Produced Water from Coal Bed Methane Wells*. Available online at: <http://www.ead.anl.gov/pub/doc/cbm-prod-water-rev902.pdf>. DCN 03450.

Wheaton, John, et al. 2006. Montana Bureau of Mines and Geology. *2005 Annual Coalbed Methane Regional Ground-water Monitoring Report: Northern Portion of the Powder River Basin*. Open-File Report 538. (Unknown). DCN 03474.

WDEQ. 2002. Wyoming Department of Environmental Quality. *Off-channel, Unlined CBM-produced Water Pit Siting Guidelines for the Powder River Basin*. (August 6). DCN 03883.

WDEQ. 2006. Wyoming Department of Environmental Quality. “Coal Bed Methane Permits.” Available online at: <http://deq.state.wy.us/wqd/npdes/QLstPermits.asp>. DCN 03905.

WOGCC. 2005. Wyoming Oil and Gas Conservation Commission. *Coalbed Methane Wells in the Powder River Basin*. Available online at: <http://wogcc.state.wy.us/coalbedchart.cfm>. DCN 03882.

WOGCC. 2006. Wyoming Oil and Gas Conservation Commission web site. Available online at: <http://wogcc.state.wy.us/>. Date accessed: August 18, 2006. DCN 03904.

WYSGS. 2006. Wyoming State Geological Survey. *Coalbed Methane Information*. Available online at: [http://www.wsgs.uwyo.edu/Coal/CBM\\_Info.aspx](http://www.wsgs.uwyo.edu/Coal/CBM_Info.aspx). DCN 03884.

Zimpfer, G.L., E.J. Harmon, and B.C. Boyce. 1988. *Disposal of Production Waters from Oil and Gas Wells in the Northern San Juan Basin, Colorado*. In: Fassett, J.E. Fassett, ed. *Geology and Coal-Bed Methane Resources of the Northern San Juan Basin, New Mexico and Colorado, 1988 CBM Symposium*. Denver, CO: Rocky Mountain Association of Geologists. pp. 183-198. DCN 01190.

## **7.0 COAL MINING (40 CFR PART 434)**

EPA selected the Coal Mining Category for additional data collection and analysis because of comments received on the 2006 Preliminary Effluent Guidelines Plan. The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 2004). This section describes EPA's 2006 annual review of the discharges associated with the Coal Mining Category.

### **7.1 Coal Mining Category Background**

This subsection provides background on the Coal Mining Category including a brief profile of the coal mining industry, background on 40 CFR Part 434, and a description of the Surface Mining Control and Reclamation Act of 1977 (SMCRA).

#### **7.1.1 Coal Mining Industry Profile**

The Coal Mining Category includes facilities reporting under SIC industry groups 122: Bituminous Coal and Lignite Mining and 123: Anthracite Mining. Specifically, it includes the following SIC codes, described below (U.S. Census, 2002):

- 1221: Bituminous Coal and Lignite Surface Mining. Establishments primarily engaged in producing bituminous coal or lignite at surface mines or in developing bituminous coal or lignite surface mines. This industry includes auger mining, strip mining, culm bank mining, and other surface mining, by owners or lessees or by establishments which have complete responsibility for operating bituminous coal and lignite surface mines for others on a contract or fee basis. Bituminous coal and lignite preparation plants performing such activities as cleaning, crushing, screening or sizing are included if operated in conjunction with a mine site, or if operated independently of any type of mine.
- 1222: Bituminous Coal Underground Mining. Establishments primarily engaged in producing bituminous coal in underground mines or in developing bituminous coal underground mines. This industry includes underground mining by owners or lessees or by establishments which have complete responsibility for operating bituminous coal underground mines for others on a contract or fee basis. Bituminous coal preparation plants performing such activities as cleaning, crushing, screening or sizing are included if operated in conjunction with a mine. Independent bituminous coal preparation plants are classified in SIC code 1221.
- 1231: Anthracite Mining. Establishments primarily engaged in producing anthracite or in developing anthracite mines. All establishments in the United States that are classified in this industry are located in Pennsylvania. This industry includes mining by owners or lessees or by establishments which have complete responsibility for operating anthracite mines for others on a contract or fee basis. Also included are anthracite preparation plants, whether or not operated in conjunction with a mine.

Table 7-1 lists the three SIC codes with operations in the Coal Mining Category. The number of coal mining facilities in the PCS and TRI databases accounts for less than 10 percent of the mines recorded in the 2002 U.S. Economic Census. All coal mines discharge their wastewater directly to surface water, and none discharge to POTWs.

**Table 7-1. Number of Facilities in Coal Mining SIC Codes**

| SIC Code  | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 1221: Bituminous Coal and Lignite, Surface Mining     | 642                       | 90                    | 55                    | 64                    |
| 1222: Bituminous Coal and Lignite, Underground Mining | 478                       | 18                    | 27                    | 23                    |
| 1231: Anthracite Mining                               | 0                         | 0                     | 0                     | 0                     |
| <b>Total</b>  | <b>1120</b>               | <b>108</b>            | <b>82</b>             | <b>87</b>             |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v4*; *TRIRelases2003\_v2*; *TRIRelases2002\_v4*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

EPA also obtained information, shown in Table 7-2, on the number of coal mines and their production from the Office of Surface Mining and Regulatory Enforcement (OSMRE), a division of the Office of the Interior (OSMRE, 2004). OSMRE provides counts of mine permits obtained under the SMCRA. In some cases, one mining location may have multiple SMCRA permits, which is why the mine counts from the 2002 U.S. Economic Census (Table 7-1) are less than the number of permits tracked by OSMRE (Table 7-2).

**Table 7-2. Number of Permitted U.S. Coal Mining Operations and Production in 2004**

| Mine Type    | Number of Mine Permits | Production (Millions of Short Tons) |
|--------------|------------------------|-------------------------------------|
| Surface      | 2048                   | 726                                 |
| Underground  | 1105                   | 350                                 |
| <b>Total</b> | <b>3,253</b>           | <b>1,076</b>                        |

Source: U.S. Coal Production Under the Surface Mining Law for 2004 (OSMRE, 2004).

EPA obtained information on production and production trends from the Energy Information Administration (EIA), which reports this information by mining region (EIA, 2005). Table 7-3 presents actual production for 2003 and predicted production for 2004, 2005, 2006, and 2030. Overall, the EIA predicts a steady increase in coal production by 2030 for the United States as a whole, with more growth in U.S. coal mining in the west than the east.

**Table 7-3. U.S. Coal Production in 2003 and Predictions to 2030  
(In Millions of Short Tons)**

| Region                  | Actual Production | Predicted Production |             |             |             |
|-------------------------|-------------------|----------------------|-------------|-------------|-------------|
|                         | 2003              | 2004                 | 2005        | 2006        | 2030        |
| Appalachia              | 388               | 403                  | 397         | 402         | 412         |
| Interior                | 146               | 146                  | 155         | 153         | 281         |
| West                    | 549               | 575                  | 593         | 611         | 1010        |
| East of the Mississippi | 481               | 497                  | 499         | 503         | 633         |
| West of the Mississippi | 603               | 627                  | 646         | 662         | 1070        |
| <b>Total</b>            | <b>1083</b>       | <b>1125</b>          | <b>1145</b> | <b>1166</b> | <b>1703</b> |

Source: Coal Production and Number of Mines by State and Mine Type (EIA, 2005).

### 7.1.2 40 CFR Part 434

EPA first promulgated ELGs for the Coal Mining Category (40 CFR Part 434) on October 9, 1985 (50 FR 41305). Table 7-4 presents the eight subcategories for the Coal Mining ELGs.

**Table 7-4. Coal Mining ELGs**

| Subpart   | Subcategory Name  | Type of Limitation Guideline   |
|-----------|---|--|
| Subpart A | General Provisions  | Definitions and applicability  |
| Subpart B | Coal Preparation Plants and Coal Preparation Plant Associated Areas | BPT, BAT, NSPS   |
| Subpart C | Acid or Ferruginous Mine Drainage                                   | BPT, BAT, NSPS   |
| Subpart D | Alkaline Mine Drainage  | BPT, BAT, NSPS   |
| Subpart E | Post-Mining Areas   | BPT, BAT, NSPS   |
| Subpart F | Miscellaneous Provisions  | Provisions for commingling of waste streams, alternate effluent limitation for pH, effluent limitations for precipitation events, procedure and method detection limit for measurement of settleable solids, and modification of NPDES permits for new sources |
| Subpart G | Coal Remining   | BPT, BAT, BCT, NSPS  |
| Subpart H | Western Alkaline Coal Mining  | BPT, BAT, NSPS   |

Source: *Coal Mining Point Source Category BPT, BAT, BCT Limitations and New Source Performance Standards – 40 CFR Part 434.*

The Coal Mining ELGs sets numerical limitations for Subparts A through F, listed in Table 7-5. The technology basis for these limitations and standards is neutralization, chemical precipitation, and settling. BAT limitations are the same as BPT limitations.

**Table 7-5. BPT and BAT Effluent Guidelines for Coal Mining Part 434 Subparts A – F**

| Parameter                      | BPT/BAT<br>30-day Average (mg/L) | BPT/BAT<br>Daily Maximum (mg/L) |
|--------------------------------|----------------------------------|---------------------------------|
| TSS                            | 35                               | 70                              |
| Settleable Solids <sup>a</sup> | 0.5 mL/L                         |                                 |
| pH                             | within range of 6 to 9           | within range of 6 to 9          |
| Iron, Total                    | 3.5                              | 7.0                             |
| Manganese, Total <sup>b</sup>  | 2.0                              | 4.0                             |

Source: *Development Document for Effluent Limitations Guidelines and Standards for the Coal Mining Point Source Category* (U.S. EPA, 1982).

<sup>a</sup>Limits for settleable solids only apply to Subpart E - Post Mining Areas.

<sup>b</sup>Manganese limits do not apply for Subpart D - Alkaline Drainage Mines.

In addition to the ELGs presented in Table 7-5, Subpart F – Miscellaneous Provisions contains alternative limitations that apply during catastrophic precipitation events. These limitations, listed in Table 7-6, apply to discharges that result from a rainfall or snowmelt event less than the 10-year, 24-hour storm. For events greater than the 10-year, 24-hour precipitation event, the only limitation is that pH remain between 6 and 9.

**Table 7-6. Catastrophic Precipitation Event Exemption of 40 CFR Part 434**

| Parameter                      | BPT - Daily Maximum    |
|--------------------------------|------------------------|
| Settleable Solids <sup>a</sup> | 0.5 mL/L               |
| pH                             | within range of 6 to 9 |

Source: *Development Document for Effluent Limitations Guidelines and Standards for the Coal Mining Point Source Category* (U.S. EPA, 1982).

<sup>a</sup>No limits on settleable solids when precipitation exceeds the 10-year, 24-hour storm.

For Subpart G – Coal Remining, BPT sets numerical limitations for TSS (35 mg/L), and discharges from remining operations may not exceed pre-existing loading conditions (baseline loadings) for all other parameters. BAT for Subpart G requires implementation of a pollution abatement plan. Similarly, for Subpart H, operators must submit and implement a Sediment Control Plan to maintain sediment discharges at or below premining levels.

### 7.1.3 Surface Mining Control and Reclamation Act of 1977 (SMCRA)

The ELGs in 40 CFR Part 434 work in concert with SMCRA. The Coal Mining ELGs apply to discharges from mining areas and do not require reclamation activities such as regrading and revegetation. Those activities are covered by SMCRA, which is implemented by OSMRE. Under SMCRA, a permitting process requires mine operators to conduct research to determine reclamation requirements and obtain bonds to cover reclamation costs before coal mining can begin.

Mine operators must collect at least one year of baseline surface- and ground-water monitoring data before applying for a coal mining and reclamation permit under SMCRA. Permit applicants use these baseline data to generate erosion and sedimentation plans to

minimize environmental impacts. Regulatory authorities use these data to perform Probable Hydrologic Consequences (PHC) evaluations, projecting the hydrologic impacts of the coal mining and reclamation. Regulators also require protection, mitigation, and rehabilitation plans as part of the permit application.

Before mining can begin, regulatory authorities must approve the PHC evaluation and accompanying plans. Under SMCRA, if authorities predict that acid mine drainage will result from the proposed mine, then a permit is not granted. Authorities also require coal mine operators to submit bonds that cover the estimated costs of reclaiming and restoring disturbed areas. Bonds are required in case the operator forfeits the mine before it has been reclaimed. Authorities review permits, require renewals, and inspect mine activities throughout the life of the mine, to ensure the use of proper erosion and sedimentation control, treatment of mine drainage, mitigation, and rehabilitation.

**7.2 Coal Mining Category 2005 Annual Review**

This subsection discusses EPA’s 2005 annual review of the Coal Mining Category including the screening-level review and category-specific review.

**7.2.1 Coal Mining Category 2005 Screening-Level Review**

Table 7-7 presents the Coal Mining Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*. The PCS and TRI databases contain data from approximately only 10 percent of the mines; therefore, the 2005 screening-level analysis of these data does not reflect national discharges.

**Table 7-7. Coal Mining Category 2005 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|-----------------------|----------------------------|----------------------------|------------|
| Coal Mining           | 3,116                      | 1,908                      | 8,024      |

Source: *2005 Annual Screening-Level Analysis* (U.S. EPA, 2005); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

**7.2.2 Coal Mining Category 2005 Pollutants of Concern**

EPA did not identify any pollutants of concern, in terms of TWPE, in the 2005 annual review of the Coal Mining Category. Commenters have raised concerns over manganese, not because of its toxic-weighted load, but because of the associated expense for its treatment and removal, especially in discharges from mines that closed long ago.

**7.3 Coal Mining Category Potential New Subcategories**

EPA did not identify any potential new subcategories for the Coal Mining Category.

#### **7.4 Coal Mining Category 2006 Annual Review**

EPA received public comments from states, industry, and a public interest group on the 2006 Preliminary Plan. These comments urged EPA to consider revisiting the manganese limitations in 40 CFR Part 434. The state and industry commenters requested that EPA study whether additional flexibility is warranted with these manganese limitations (EPA-HQ-OW-2004-0032-1049, 1055, 1062, 1075, 1091, 1101). The public interest group commented that EPA should start a rulemaking and promulgate more stringent limitations for manganese, other metals, and other dissolved inorganic pollutants (e.g., chlorides, sulfates, TDS) (EPA-HQ-OW-2004-0032-1075).

The state and industry commenters cited the following factors in support of their comments: (1) new, more stringent coal mining reclamation bonding requirements on post-closure discharges; (2) relatively low toxicity of manganese to aquatic communities as compared to other toxic metals in the coal mining discharges; and (3) complications associated with chemical precipitation to treat manganese, especially after a mine is closed. The public interest group referenced a study by EPA Region 5 on potential adverse impacts of the discharge of sulfates on aquatic life (OW-2004-0032-DCN 03852, 03853, 03854, and 03855). Table 2-1 in Section 2.0 of this report summarizes all comments received on the 2006 Preliminary Plan, including those related to the Coal Mining Category.

#### **7.5 Coal Mining Category Conclusions**

At this time, EPA does not have sufficient information to evaluate the merits of the factors cited by commenters. However, because of the potential for revised ELGs to encourage proper wastewater treatment, EPA will conduct a detailed study of the Coal Mining ELGs in the 2007/2008 planning cycle. EPA will focus on issues related to manganese limits and pollutants not currently regulated by the existing regulations. EPA will reevaluate these effluent guidelines taking into account, among other things, treatment technologies, toxicity of discharges, cost impacts to the industry, and bonding requirements.

#### **7.6 Coal Mining Category References**

EIA. 2005. Energy Information Administration. Coal Production and Number of Mines by State and Mine Type. Available online at: [www.eia.doe.gov/cneaf/coal/page/acr/table1.html](http://www.eia.doe.gov/cneaf/coal/page/acr/table1.html). Date accessed: April 2006. DCN 03863.

OSMRE. 2004. U.S. Department of Interior, Office of Surface Mining and Regulatory Enforcement. U.S. Coal Production Under the Surface Mining Law for 2004. Available online at: <http://www.osmre.gov/coal/2004coal.htm>. Date accessed: April 2006. DCN 03982.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1982. *Development Document for Effluent Limitations Guidelines and Standards for the Coal Mining Point Source Category*. EPA-440/1-82/009. Washington, DC. (June).

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

## **8.0 FERTILIZER MANUFACTURING (40 CFR PART 418)**

EPA selected the Fertilizer Manufacturing Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FC 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 2004). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the Fertilizer Manufacturing Category. EPA's 2006 annual review builds on the 2005 annual review. EPA focused on discharges of fluoride from three facilities in the Phosphate Subcategory, because of their high TWPE relative to the rest of the Fertilizer Manufacturing Category.

### **8.1 Fertilizer Manufacturing Category Background**

This subsection provides background on the Fertilizer Manufacturing Category including a brief profile of the fertilizer manufacturing industry and background on 40 CFR Part 418. Additional background on the Fertilizer Manufacturing Category can be found in the 2004 Technical Support Document (U.S. EPA, 2004).

#### **8.1.1 Fertilizer Manufacturing Industry Profile**

The fertilizer manufacturing industry includes facilities that produce phosphorus- and nitrogen-based fertilizers (U.S. EPA, 2005b). Facilities subject to this category typically report under SIC codes 2873: Nitrogenous Fertilizers, 2874: Phosphatic Fertilizers, and 2875: Fertilizers, Mixing Only (U.S. EPA, 2005b). Because there may be an overlap for facilities reporting SIC code 2874: Phosphatic Fertilizers between the Fertilizer Manufacturing Category and the Phosphate Manufacturing Category, during the 2004 screening-level review, EPA reviewed operations at the top dischargers reporting SIC code 2874 and determined which category was most appropriate for their operations (U.S. EPA, 2004). Table 8-1 presents the findings for facilities reporting SIC code 2874 that EPA identified as subject to the Fertilizer Manufacturing ELGs.

Table 8-2 lists the three SIC codes with operations in the Fertilizer Manufacturing Category. Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census data by equivalent SIC code. The facilities in SIC code 2874 that are possibly subject to the Fertilizer Manufacturing ELGs do not correlate directly to a NAICS code, and therefore EPA could not determine the number of facilities in the 2002 U.S. Economic Census for SIC code 2874.

**Table 8-1. Top Facilities Reporting Under SIC Code 2874**

| Facility<br>(Location)                                      | Final Category<br>Designation in<br>2004 Screening<br>Level Review | Description  |
|---|--|--|
| IMC Phosphates<br>Uncle Sam<br>(Uncle Sam, LA) <sup>a</sup> | Phosphate<br>Category  | Manufactures phosphoric acid and hydrofluoric acid (covered by 40 CFR Part 422 Subpart C – Phosphate Subcategory) and sulfuric acid by burning elemental sulfur (covered by 40 CFR Part 418 Subpart A – Phosphate Subcategory). Estimated that 99% of facility's discharges are from operations subject to Part 422. |
| IMC Phosphates<br>Faustina<br>(Faustina, LA)                | Fertilizer<br>Category   | Manufactures ammonia, diammonium phosphate, and monoammonium phosphate from wet-process phosphoric acid produced at IMC Phosphates Uncle Sam (covered by 40 CFR Part 418 Subpart A). Previously manufactured wet-process phosphoric acid.  |
| Mississippi<br>Phosphates<br>(Pascagoula, MS)               | Fertilizer<br>Category   | Manufactures sulfuric acid, wet-process phosphoric acid, and diammonium phosphate (covered by 40 CFR Part 418 Subpart A).  |
| Royster-Clark Inc.<br>(Hartsville, SC)                      | Fertilizer<br>Category   | Purchases liquids, such as sulfuric acid and wet-process phosphoric acid, and other by-products and combines them in a rotary drum (covered by 40 CFR Part 418 Subpart G).   |

Source: Water Discharge Permit for NPDES LA0029769 – IMC Phosphates Company, Faustina Plant, St. James, LA (LDEQ, 2004a); *Technical Support Document for the 2004 Effluent Guidelines Program Plan* (U.S. EPA, 2004).

<sup>a</sup>During the 2006 annual review, EPA reviewed IMC Phosphates Uncle Sam facility's permit and determined the facility discharges are regulated by 40 CFR Part 418 Fertilizer Manufacturing, as discussed in Section 8.5.4.

**Table 8-2. Number of Facilities in Fertilizer Manufacturing SIC Codes**

| SIC Code                                  | 2002 U.S. Economic<br>Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|------------------------------|-----------------------|-----------------------|-----------------------|
| 2873: Nitrogen Fertilizers                | 143                          | 40                    | 61                    | 52                    |
| 2874: Phosphatic Fertilizers <sup>c</sup> | NA <sup>d</sup>              | 1                     | 2                     | 3                     |
| 2875: Fertilizers, Mixing Only            | 542                          | 5                     | 57                    | 57                    |
| <b>Total</b>                              | <b>&gt;685</b>               | <b>46</b>             | <b>120</b>            | <b>112</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>Includes only facilities with known discharges subject to the Fertilizer Manufacturing ELGs. During the 2004 and 2005 annual reviews, EPA classified IMC Phosphates Uncle Sam as subject to the Phosphate Manufacturing Category, so this facility is not included in the 2002 TRI and PCS counts. However, after permit review, EPA determined the discharges should be included in the Fertilizer Manufacturing Category for the 2006 annual review, discussed in Section 8.5.4.

<sup>d</sup>Poor bridging between NAICS and SIC codes. Number of facilities could not be determined.  
NA – Not applicable.

Fertilizer manufacturing facilities discharge directly to surface water as well as to POTWs. Table 8-3 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds. Of the fertilizer manufacturing facilities with wastewater discharges, most discharge directly to surface water.

**Table 8-3. Fertilizer Manufacturing Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code                                  | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 2873: Nitrogen Fertilizers                | 33                              | 3                                 | 2  | 23                           |
| 2874: Phosphatic Fertilizers <sup>a</sup> | 2                               | 0                                 | 1  | 0                            |
| 2875: Fertilizers, Mixing Only            | 7                               | 1                                 | 0  | 49                           |

Source: *TRIRelases2002\_v4*.

<sup>a</sup>Includes only facilities with known discharges subject to the Fertilizer Manufacturing ELGs. During the 2004 and 2005 annual reviews, EPA classified IMC Phosphates Uncle Sam as subject to the Phosphate Manufacturing Category, so this facility is not included in the 2002 TRI and PCS counts. However, after permit review, EPA determined the discharges should be included in the Fertilizer Manufacturing Category for the 2006 annual review, discussed in Section 8.5.4.

### 8.1.2 40 CFR Part 418

EPA first promulgated ELGs for the Fertilizer Manufacturing Category (40 CFR Part 418) on April 8, 1974 (39 FR 12836) for the Basic Fertilizer Chemicals Segment and on January 14, 1975 (40 FR 2652) for the Formulated Fertilizer Chemicals Segment. The Fertilizer Manufacturing ELGs are applicable to process wastewater and contaminated nonprocess wastewater discharged from the specific subcategories lists in Table 8-4. The seven subcategories are based on the type of fertilizer produced (U.S. EPA, 2005b). Discussion of the pollutants regulated for each subcategory can be found in Table 5-25 of the 2004 TSD (U.S. EPA, 2004).

**Table 8-4. Subcategories in the Fertilizer Category**

| Subpart | Title   | Related SIC Code(s)            | Description  |
|---------|---|--------------------------------|--|
| A       | Phosphate Subcategory                         | 2874: Phosphatic Fertilizers   | Manufacture of sulfuric acid by sulfur burning, wet-process phosphoric acid, normal superphosphate, triple superphosphate, and ammonium phosphate. |
| B       | Ammonia Subcategory                           | 2873: Nitrogenous Fertilizers  | Manufacture of ammonia.  |
| C       | Urea Subcategory                              | 2873: Nitrogenous Fertilizers  | Manufacture of urea.   |
| D       | Ammonium Nitrate Subcategory                  | 2873: Nitrogenous Fertilizers  | Manufacture of ammonium nitrate.   |
| E       | Nitric Acid Subcategory                       | 2873: Nitrogenous Fertilizers  | Production of nitric acid in concentrations up to 68 percent.  |
| F       | Ammonium Sulfate Production Subcategory       | 2873: Nitrogenous Fertilizers  | Production of ammonium sulfate by the synthetic process and by coke oven by-product recovery.  |
| G       | Mixed Blend Fertilizer Production Subcategory | 2875: Fertilizers, Mixing Only | Production of mixed <sup>a</sup> and blend <sup>b</sup> fertilizer.  |

Source: *Fertilizer Manufacturing Point Source Category - 40 CFR Part 418; Preliminary Review of Prioritized Categories of Industrial Dischargers* (U.S. EPA, 2005b).

<sup>a</sup>Mixed fertilizer means “a mixture of wet and/or dry straight fertilizer material, mixed fertilizer materials, fillers and additives prepared through chemical reaction to a given formulation.”

<sup>b</sup>Blend fertilizer means “a mixture of dry, straight and mixed fertilizer materials.”

## 8.2 Fertilizer Manufacturing Category 2005 Annual Review

This subsection discusses EPA’s 2005 annual review of the Fertilizer Manufacturing Category including the screening-level review and category-specific review.

### 8.2.1 Fertilizer Manufacturing 2005 Screening-Level Review

Table 8-5 presents the NFMM Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 8-5. Fertilizer Manufacturing Category 2005 Screening-Level Review Results<sup>a</sup>**

| Rank | Point Source Category    | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | Total TWPE |
|------|--------------------------|----------------------------|----------------------------|------------|
| 11   | Fertilizer Manufacturing | 143,795                    | 6,403                      | 150,198    |

Source: *2005 Annual Screening-Level Analysis* (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Excludes discharges from IMC Phosphates Uncle Sam. These discharges were excluded from the category because EPA determined the discharges were subject to the Phosphate Manufacturing Category (U.S. EPA, 2004).

However, after permit review, EPA determined the discharges should be included in the Fertilizer Manufacturing Category for the 2006 annual review, discussed in Section 8.5.4.

<sup>b</sup>Discharges include only major dischargers.

<sup>c</sup>Discharges include transfers to POTWs and account for POTW removals.

### 8.2.2 Fertilizer Manufacturing Category 2005 Pollutants of Concern

Table 8-6 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. The top five pollutants account for approximately 99 percent of the TRI and PCS 2002 combined TWPE. Fluoride contributed 74 percent of the combined 2002 TRI and PCS TWPE.

**Table 8-6. 2005 Annual Review: Fertilizer Manufacturing Category Pollutants of Concern**

| Pollutant                        | 2002 PCS <sup>a,b</sup>  |                       |                | 2002 TRI <sup>a,c</sup>  |                       |              |
|----------------------------------|--|-----------------------|----------------|--|-----------------------|--------------|
|                                  | Number of Facilities Reporting Pollutants                        | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutants                        | Total Pounds Released | TWPE         |
| Fluoride                         | 3  | 3,157,912             | 110,527        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |              |
| Aluminum                         | 1  | 168,191               | 10,880         |  |                       |              |
| Nitrate                          | 13   | 1,631,915             | 9,139          |  |                       |              |
| Ammonia                          | 21   | 4,189,153             | 6,306          |  |                       |              |
| Cadmium                          | 1  | 267                   | 6,172          |  |                       |              |
| Dioxin and Dioxin-Like Compounds | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 2  | 0.008                 | 2,288        |
| Chlorine                         |  |                       |                | 9  | 2,880                 | 1,467        |
| Copper and Copper Compounds      |  |                       |                | 11   | 1,383                 | 878          |
| Ammonia                          |  |                       |                | 42   | 396,220               | 596          |
| Atrazine                         |  |                       |                | 1  | 186                   | 429          |
| <b>Fertilizer Category Total</b> | <b>24</b>  | <b>540,486,797</b>    | <b>143,795</b> | <b>48</b>  | <b>4,980,379</b>      | <b>6,403</b> |

Source: *TRIRelases2002\_v2*; *PCSLoads2002\_v2*.

<sup>a</sup>Excludes discharges from IMC Phosphates Uncle Sam. These discharges were excluded from the category because EPA determined the discharges were subject to the Phosphate Manufacturing Category (U.S. EPA, 2004).

However, after permit review, EPA determined the discharges should be included in the Fertilizer Manufacturing Category for the 2006 annual review, discussed in Section 8.5.4.

<sup>b</sup>Discharges include only major dischargers.

<sup>c</sup>Discharges include transfers to POTWs and account for POTW removals.

### 8.3 Potential New Subcategories for the Fertilizer Manufacturing Category

EPA did not identify any potential new subcategories for the Fertilizer Manufacturing Category.

#### **8.4 Fertilizer Manufacturing Category 2006 Annual Review**

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Fertilizer Manufacturing Category. EPA obtained additional data and identified:

- Facility classified in the wrong category; and
- Changes in estimates of TWPE for nitrite compounds, nitrate, and chlorine.

##### **8.4.1 Fertilizer Manufacturing Category Facility Classification Revisions**

During the 2004 annual review, EPA contacted the IMC Phosphates Uncle Sam facility to determine the applicable point source category. IMC Phosphates Uncle Sam produces sulfuric acid by burning sulfur, and then uses the sulfuric acid to produce phosphoric acid, defluorinated phosphoric acid, and hydrofluoric acid. The facility confirmed their operations were included in SIC code 2874 (Oliver, 2003). Based on this information, EPA determined that the IMC Phosphates Uncle Sam facility discharges were not subject to the Fertilizer Manufacturing ELGs, but rather were subject to the Phosphate Manufacturing ELGs because the manufacture of defluorinated phosphoric acid is covered by the Phosphate Manufacturing ELGs. For the 2005 annual review, EPA continued classifying the IMC Phosphates Uncle Sam facility as subject to the Phosphate Manufacturing Category. As part of the 2006 annual review, however, EPA obtained the permit for IMC Phosphates Uncle Sam facility. The permit identifies IMC Phosphates Uncle Sam facility as a phosphatic fertilizer manufacturing facility subject to the Fertilizer Manufacturing Category (LDEQ, 2003). As a result, EPA revised its category designation for this facility and has now included its discharges in the Fertilizer Manufacturing Category.

##### **8.4.2 Fertilizer Manufacturing Category TWF and POTW Percent Removal Revisions**

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF used for nitrate and nitrate compounds in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD now applies for nitrate and nitrate compounds are 0.0032 and 0.000062, respectively (formerly 0.0056 and 0.000747, respectively). EAD also revised the POTW percent removal value for chlorine to 100 percent (formerly 1.87 percent). Table 8-7 presents the loads before and after corrections to the TWF for nitrate compounds and nitrate as N and the POTW percent removal for chlorine for the Fertilizer Manufacturing Category.

**Table 8-7. Impact of Changes to TWF and POTW Percent Removal for the Fertilizer Manufacturing Category**

| Database | Pollutant         | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|-------------------|---|-----------------------|-----------------------|
| TRI 2002 | Nitrate Compounds | 32  | 276                   | 3,323                 |
| PCS 2002 | Nitrate as N      | 13  | 9,139                 | 5,222                 |
| TRI 2002 | Chlorine          | 9   | 1,467                 | 1,373                 |

Sources: *TRIRelases2002\_v2*; *TRIRelases2002\_v4*; *PCSLoads2002\_v2*; *PCSLoads2002\_v4*.

### 8.4.3 Fertilizer Manufacturing Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings described in Section 4.2, based on methodology changes described in Section 4.2 and changes made based on permit review. For the Fertilizer Manufacturing Category, the most significant changes are also described in Section 8.4.1 and 8.4.2. Table 8-8 shows the 2006 screening-level TWPE estimated for the Fertilizer Manufacturing Category from the 2002 and 2003 TRI and 2002 PCS databases. The TRI TWPE from the 2005 and 2006 screening-level reviews are similar, but the PCS TWPE from the 2006 screening-level review greatly exceeds that estimated at the time of the 2005 screening-level review. This is largely due to the change in category designation for the IMC Phosphates Uncle Sam facility.

**Table 8-8. Fertilizer Manufacturing Category 2006 Screening-Level Review Results<sup>a</sup>**

| Point Source Category    | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | 2003 TRI TWPE <sup>c</sup> |
|--------------------------|----------------------------|----------------------------|----------------------------|
| Fertilizer Manufacturing | 1,369,762                  | 9,062                      | 10,268                     |

Source: *TRIRelases2003\_v4*; *TRIRelases2002\_v4*; *PCSLoads2002\_v4*.

<sup>a</sup>Includes discharges from IMC Phosphates Uncle Sam. These discharges were excluded from the 2005 annual category review because EPA determined the discharges were applicable to the Phosphate Manufacturing Category (U.S. EPA, 2004). However, after permit review in 2006, EPA determined the discharges should be included in the Fertilizer Manufacturing Category for the 2006 annual review, discussed in Section 8.5.4.

<sup>b</sup>Discharges include only major dischargers.

<sup>c</sup>Discharges include transfers to POTWs and account for POTW removals.

### 8.4.4 Fertilizer Manufacturing Category 2006 Pollutants of Concern

Table 8-9 presents the pollutants of concern for the Fertilizer Manufacturing Category based on the 2006 annual review. Because fluoride discharges contribute approximately 98 percent of the combined TWPE from PCS and TRI, EPA focused its remaining study of this industry on fluoride discharges.

Table 8-9. 2006 Annual Review: Fertilizer Manufacturing Category Pollutants of Concern

| Pollutant                                      | 2002 PCS <sup>a</sup>  |                       |                  | 2002 TRI <sup>b</sup>  |                       |              | 2003 TRI <sup>b</sup>  |                       |               |
|--|--|-----------------------|------------------|--|-----------------------|--------------|--|-----------------------|---------------|
|  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE             | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE         | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Fluoride                                       | 4  | 38,348,483            | 1,342,197        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |              | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |               |
| Aluminum                                       | 1  | 168,191               | 10,880           |  |                       |              |  |                       |               |
| Cadmium  | 1  | 267                   | 6,172            |  |                       |              |  |                       |               |
| Nitrate Total (as N)                           | 13   | 1,631,915             | 5,222            |  |                       |              |  |                       |               |
| Ammonia  | 21   | 4,189,153             | 4,650            |  |                       |              |  |                       |               |
| Nitrate Compounds                              | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                  | 32   | 4,450,361             | 3,323        | 33   | 4,402,180             | 3,287         |
| Dioxin and Dioxin-like Compounds               |  |                       |                  | 2  | 0.0080                | 2,288        | 2  | 0.0093                | 2,658         |
| Chlorine                                       |  |                       |                  | 9  | 2,697                 | 1,373        | 10   | 2,846                 | 1,449         |
| Copper and Copper Compounds                    |  |                       |                  | 11   | 1,382                 | 878          | 10   | 1,138                 | 722           |
| Ammonia  |  |                       |                  | 42   | 396,219               | 440          | 40   | 727,893               | 808           |
| <b>Fertilizer Manufacturing Category Total</b> | <b>24</b>  | <b>624,125,300</b>    | <b>1,369,762</b> | <b>49</b>  | <b>4,980,784</b>      | <b>9,062</b> | <b>49</b>  | <b>5,276,210</b>      | <b>10,268</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

## 8.5 Fertilizer Manufacturing Category 2006 Top Discharging Facilities

The PCS discharges account for approximately 99 percent of the combined TRI and PCS TWPE for 2002. The additional review of the Fertilizer Manufacturing Category focuses on discharges reported to PCS in 2002. Table 8-10 lists the facilities that contribute over 99 percent of the overall Fertilizer Manufacturing Category TWPE. The vast majority of the TWPE contributed by these facilities is a result of fluoride discharges. Fluoride is generated in the manufacture of wet-process phosphoric acid that is used in phosphatic fertilizer manufacturing (U.S. EPA, 1974). This subsection provides a process description for wet-process phosphoric acid manufacturing, discusses the wastewater sources of fluoride, wastewater treatment of fluoride, and presents additional information about the top discharging facilities.

**Table 8-10. 2006 Annual Review: Fertilizer Manufacturing Category Top Discharging Facilities in PCS**

| Facility Name                            | Facility Location     | Products   | Top Pollutant Discharged | Total Pounds Discharged | Total TWPE | Percentage of Fertilizer Manufacturing Category PCS 2002 TWPE |
|--|-----------------------|--|--------------------------|-------------------------|------------|---|
| IMC Phosphates<br>Uncle Sam              | Uncle Sam, LA         | Wet-process<br>Phosphoric Acid                                     | Fluoride                 | 83,638,502              | 1,231,795  | 89.9%   |
| IMC Phosphates<br>Faustina               | Donaldsonville,<br>LA | Ammonia, DAP<br>and MAP using<br>Phosphoric Acid<br>from Uncle Sam | Fluoride                 | 6,791,067               | 81,571     | 6.0%  |
| Mississippi<br>Phosphates<br>Corporation | Pascagoula, LA        | Sulfuric Acid,<br>Phosphoric Acid,<br>DAP                          | Fluoride                 | 14,720,096              | 47,286     | 3.5%  |


Source: *PCSLoads2002\_v4*.

MAP – Monoammonium phosphate ( $\text{NH}_4\text{H}_2\text{PO}_4$ ).

DAP – Diammonium phosphate ( $(\text{NH}_4)_2\text{HPO}_4$ ).

### 8.5.1 Wet-Process Phosphoric Acid Process Description

In the wet process, phosphate rock is reacted with sulfuric acid and water to produce phosphoric acid and gypsum. The reaction is as follows:



The product phosphoric acid and gypsum solution are mechanically filtered to remove particulate gypsum. Each pound of phosphoric acid produced generates five pounds of gypsum by-product (U.S. EPA, 1974).

The phosphoric acid contains between 26 and 30 percent phosphorous oxide ( $\text{P}_2\text{O}_5$ ) and must be concentrated for sale as phosphoric acid or processed for a final fertilizer product. The phosphoric acid is concentrated using water evaporation units, which also volatilize impurities, such as fluoride, and small fractions of the phosphoric acid. The volatilized

water, impurities, and phosphoric acid are condensed and sent to wastewater treatment (U.S. EPA, 1974).

The concentrated phosphoric acid is clarified to remove any solid impurities before sale or further processing for fertilizer. The fertilizer products manufactured using phosphoric acid are:


- Manufacture of triple superphosphates ( $\text{Ca}(\text{H}_2\text{PO}_4)_2 \cdot \text{H}_2\text{O}$ ) by reacting the phosphoric acid with additional phosphate rock and water;
- Manufacture of granular triple superphosphate ( $\text{Ca}(\text{H}_2\text{PO}_4)_2 \cdot \text{H}_2\text{O}$ ) by reacting lower concentration phosphoric acid with phosphate rock and evaporating the water to form granules; and
- Manufacture of ammonium phosphates ( $\text{NH}_4\text{H}_2\text{PO}_4$  or  $(\text{NH}_4)_2\text{HPO}_4$ ) by reacting phosphoric acid with ammonia and evaporating the water to form granules (U.S. EPA, 1974).

### 8.5.2 Wastewater Sources of Fluoride


The phosphate rock is not a pure compound, but a fluorapatite mineral containing impurities of fluoride, iron, aluminum, silica, and uranium. The fluoride impurities evolve into gaseous silicon tetrafluoride ( $\text{SiF}_4$ ) or gaseous hydrofluoric acid (HF) throughout the manufacture of phosphoric acid and the processing of phosphoric acid into triple superphosphates. The gaseous fluoride compounds are collected in a wet scrubber unit, generating fluoride-contaminated wastewater. Additional fluoride remains in the gypsum by-product as a variety of fluoride compounds. The gypsum is combined with contaminated wastewater and pumped to a storage and disposal area. Wastewater is also generated from stormwater drainage from the storage and disposal area (U.S. EPA, 1974).

### 8.5.3 Wastewater Treatment of Fluoride

The basis for the existing BAT ELGs is a two-stage chemical precipitation process using lime to address pH, fluoride, and phosphorous. This treatment emerged in the industry in the early 1960s and is commonly used at facilities that manufacture phosphorous-based fertilizers. It increases the pH of contaminated water to between 3.5 and 4.0 in the first stage. The following reaction occurs in the first stage of the liming process to remove the majority of the fluoride:



After adequate settling time, the wastewater contains 30-60 mg/L fluoride and up to 5,500 mg/L phosphorous. The second stage of the liming process raises the pH to between 6.0 and 9.0 to primarily remove the phosphorous compounds. The reaction that occurs in the second stage of the liming process is:



The second stage also removes some additional fluoride. Precipitation of calcium fluoride and dicalcium phosphate reduces the concentration of fluoride to 15 mg/L or less and phosphorous to 10 to 40 mg/L (U.S. EPA, 1974). Current technologies are achieving fluoride concentrations at least as effective, sometimes achieving 2 mg/L effluent fluoride. The chemical precipitation has improved by using calcium chloride (CaCl<sub>2</sub>) rather than lime, while solids separation has improved by using polymers and membrane filters (WC&E, 2006; Ionics, Unknown; GCIP, 2002).

#### 8.5.4 Top Facility Permit Compliance

All of the top facilities in the Fertilizer Manufacturing Category are phosphate fertilizer manufacturers and are potentially subject to 40 CFR Part 418 Subpart A – Phosphate Subcategory. Subpart A BAT includes limits on flow-based surge capacity and pollutant discharge concentrations. The flow-based requirements are:

- Zero discharge of wastewater except from the gypsum storage and disposal area;
- Maintenance of a surge capacity for a 10-year, 24-hour storm event (BPT) or a 25-year, 24-hour storm event (BAT) in the gypsum storage and disposal area;
- If stored wastewater reaches 50 percent of the required surge capacity, the facility is *allowed* to discharge treated wastewater;
- If stored wastewater exceeds 50 percent of the required surge capacity, the facility is *required* to discharge treated wastewater; and
- During discharge events, facilities are required to meet limitations for phosphorous, fluoride (25 mg/L monthly average and 75 mg/L daily maximum), total suspended solids, and pH (U.S. EPA, 1974).

Facilities minimize the volume of wastewater discharged by impounding and recirculating all direct contact process wastewater, including stormwater runoff from active gypsum storage and disposal areas. This recirculation leads to an accumulation of fluoride, phosphorous, and radium in the wastewater with concentrations in excess of 8,500 mg/L fluoride, 5,000 mg/L phosphorous, and 60 pCi/L radium 226. Additionally, the wastewater is typically very acidic, between a pH of one to two. Several facilities report that they have not treated or discharged wastewater for several years. For the 1974 rulemaking, EPA determined that most facilities would discharge continuously between two and four months of the year (U.S. EPA, 1974).

The applicability of Subpart A excludes certain wet-process phosphoric acid processes from BPT, BAT, and BCT limitations that were under construction either on or before April 8, 1974, at plants located in the state of Louisiana. As a result, the IMC Phosphates Uncle Sam and Faustina facilities are excluded from Subpart A. Permit writers limit discharges from these facilities using best professional judgment (BPJ) (see 52 FR 28428, July 29, 1987). For some portion of the discharges from the IMC Phosphates Uncle Sam and Faustina facilities, BPJ permits incorporate Subpart A requirements (see Table 8-12). All discharges from Mississippi Phosphates Corporation are permitted based on Subpart A (MDEQ, 2002a; MDEQ, 2002b).

Table 8-11 presents the fluoride discharges reported to PCS in 2002 by outfall and the corresponding fluoride permit limit for the top three fertilizer manufacturing facilities and the calculated fluoride discharge based on the permit limits. Table 8-12 presents the discharge flow restrictions included in each facility’s permit.

**Table 8-11. Fertilizer Manufacturing Category, Top Fluoride Outfalls**

| Name                                  | Outfall with Fluoride Discharges  | Pounds of Fluoride Discharged | TWPE of Fluoride Discharges | Permit Limits  | Calculated Maximum Pounds of Fluoride Using Permit Limits |
|---------------------------------------|---|-------------------------------|-----------------------------|--|---|
| IMC Phosphates Uncle Sam <sup>a</sup> | 001: Once-through cooling water, scrubber water, non-process wastewater, fertilizer area stormwater, inactive gypsum storage area, and active gypsum storage area | 35,190,572                    | 1,231,670                   | Limits for outfall 001 excluding inactive and active gypsum storage area discharges:<br>165.0 lb/day monthly average<br>222.8 lb/day daily maximum | 81,322 <sup>b</sup>                                       |
| IMC Phosphates Faustina               | 001: Active gypsum storage area, process wastewater, stormwater, nonprocess wastewater, and noncontact cooling water  | 105,272                       | 3,685                       | 25 mg/L monthly average<br>75 mg/L daily maximum   | 131,636 <sup>c</sup>                                      |
|                                       | 002: Inactive gypsum storage area   | 1,737,420                     | 60,810                      | Monitor and report fluoride discharges   | NA  |
| Mississippi Phosphates Corporation    | 001: Noncontact cooling water and stormwater  | 1,304,595                     | 45,661                      | 292 lb/day monthly average<br>876 lb/day daily maximum;<br>based on:<br>25 mg/L monthly average<br>75 mg/L daily maximum                           | 319,740 <sup>b</sup>                                      |

Source: Facility Permits (LDEQ, 2003; LDEQ, 2004a; LDEQ, 2004b; MDEQ, 2002a; MDEQ, 2002b); PCSLoads2002\_v4.

<sup>a</sup>Pounds of fluoride using permit limits cannot be calculated because fluoride is not limited for outfall 002.

<sup>b</sup>Pounds of fluoride calculated using the daily maximum fluoride lb/day permit limit and 365-day per year discharge.

<sup>c</sup>Pounds of fluoride calculated using the daily maximum fluoride mg/L permit limit, 365-day per year discharge, and the 30-day maximum flow 7.01 MGD flow (LDEQ, 2004b).

NA – Not applicable. The pounds of fluoride cannot be calculated using the permit limits since flow data are not available.

**Table 8-12. Fertilizer Manufacturing Category, Permit Flow Requirements**

| Name  | Permit Findings   |
|---|---|
| IMC Phosphates Uncle Sam <sup>a</sup>           | Acknowledges exemption of flow requirements; portion of gypsum storage and disposal are designated inactive; stormwater from inactive storage and disposal area discharged without treatment; FDF granted to exempt facility from recycling process wastewater by installing fluoride scrubber; gypsum storage area must meet BAT requirements; optional discharge of treated wastewater below 50% surge capacity; required discharge of treated wastewater above 50% storage capacity. |
| IMC Phosphates Faustina                         | No acknowledgement of exemption of flow requirements; no discharge of process wastewater; gypsum storage area must meet BAT requirements; optional discharge of treated wastewater below 50% surge capacity; required discharge of treated wastewater above 50% storage capacity.   |
| Mississippi Phosphates Corporation <sup>b</sup> | Gypsum storage area must meet BAT requirements; optional discharge of treated wastewater below 50% surge capacity; required discharge of treated wastewater when above 50% surge capacity.  |

Source: Facility Permits (LDEQ, 2003; LDEQ, 2004a; LDEQ, 2004b; MDEQ, 2002a; MDEQ, 2002b); PCSLoads2002\_v4.

<sup>a</sup>Facility permit includes mass-based fluoride limitations (165.0 lb/day monthly average, 222.8 lb/day daily maximum) for one outfall based on fluoride removal efficiency of the scrubber.

<sup>b</sup>Facility permit includes mass-based fluoride limitations that were calculated using the ELGs concentrations and the facility flow rates, as provided in the Permit Rationale (MDEQ, 2002a).

FDF – Fundamentally different factors variance.

IMC Phosphates Uncle Sam reported over 35 million pounds of fluoride to PCS in 2002; however, using their daily maximum fluoride permit limit and 365 days of discharge, the facility should only discharge 81,322 pounds of fluoride per year. Mississippi Phosphates Corporation reported over 1.3 million pounds of fluoride to PCS in 2002; however, using their daily maximum fluoride permit limit and 365 days of discharge, the facility should only discharge 319,740 pounds of fluoride per year. Both facilities appear to be exceeding their mass-based permit limits for fluoride.

IMC Phosphates Faustina reported over 105,000 pounds of fluoride to PCS in 2002; the estimated fluoride discharge using the daily maximum fluoride permit limit and maximum flow of 7.01 MGD for outfall 001 is 131,636 pounds of fluoride per year (LDEQ, 2004b). The fluoride concentrations that IMC Phosphates Faustina reported from 2002 through 2005 for outfall 001 are within the permitted limits. The estimated fluoride discharge for outfall 002 cannot be calculated since the discharge is not limited. The fact sheet for this facility listed an estimated discharge of 2.464 MGD intermittently from outfall 002, which is potentially contaminated stormwater runoff from the inactive calcium sulfate storage pile and is not treated prior to discharge. The fluoride concentrations from this outfall range from 233 mg/L to 1,116 mg/L, far greater than the treatable concentrations reported in the 1974 Development Document (U.S. EPA, 1974).

## 8.6 Fertilizer Manufacturing Conclusions

- Previously, EPA identified IMC Phosphates Uncle Sam as subject to the Phosphate Manufacturing ELGs. After reviewing the facility's permit, EPA determined that this facility is subject to the Fertilizer Manufacturing ELGs.
- For the 2006 screening-level review, the high TWPE ranking for the Fertilizer Manufacturing Category is from fluoride dischargers from three facilities manufacturing phosphate-based fertilizer from wet-process phosphoric acid. One facility, IMC Phosphates Uncle Sam, contributes over 92 percent of the Fertilizer Manufacturing Category fluoride TWPE reported to PCS in 2002.
- 40 CFR Part 418 regulates fluoride discharges from operations in the Phosphate-Based Fertilizer Subcategory, requiring zero discharge except during certain storm events, and treatment of fluoride discharges to 25 mg/L (monthly average) and 75 mg/L (daily maximum).
- High fluoride discharges are from three facilities: IMC Phosphates Uncle Sam, Mississippi Phosphates Corporation, and IMC Phosphates Faustina. All three are report continuous, 12-month discharges.
- IMC Phosphates Uncle Sam is exempt from Subpart A, so the permit is based on BPJ but includes fluoride limits. The facility appears to be exceeding their fluoride limits.
- Mississippi Phosphates Corporation's permit is based on Subpart A. The facility appears to be exceeding their fluoride limits.
- IMC Phosphates Faustina is exempt from Subpart A, so the permit is based on BPJ but includes fluoride limits, monitoring, and reporting requirements. Fluoride discharges from outfall 001 are within the permitted limits. Fluoride discharges from outfall 002 are not limited, but monitored and reported at concentrations greater than the treatable concentrations reported in the 1974 Development Document (U.S. EPA, 1974).

## 8.7 Fertilizer Manufacturing References

GCIP. 2002. General Chemical Industrial Products. Chapter 14 – Wastewater and Water Treatment. Available online at: <http://www.genchem.com/calcium/NCh14.html>. Date accessed: July 27, 2006. DCN 03761.

Ionics. Unknown. "The EnChem® Process for Fluoride Removal." *Wastewater Treatment for the Microelectronics Industry*. Available online at: <http://www.iconics.com/pdf/TS4752EUS.pdf>. Date accessed: July 27, 2006. DCN 03760.

LDEQ. 2003. Louisiana Department of Environmental Quality. Office of Environmental Services Water Discharge Permit and Fact Sheet NPDES LA0004847 – IMC Phosphates Company Uncle Sam Plant, Uncle Sam, LA. Baton Rouge, LA. (June 16). DCN 02764.

LDEQ. 2004a. Louisiana Department of Environmental Quality. Water Discharge Permit for NPDES LA0029769 – IMC Phosphates Company, Faustina Plant, St. James, LA. Baton Rouge, LA. DCN 02424.

LDEQ. 2004b. Louisiana Department of Environmental Quality. Water Discharge Permit Fact Sheet for NPDES LA0029769 – IMC Phosphates Company, Faustina Plant, St. James, LA. Baton Rouge, LA. DCN 02424.

MDEQ. 2002a. Mississippi Department of Environmental Quality. State of Mississippi Water Pollution Control Permit to Discharge Wastewater in Accordance with the National Pollution Discharge Elimination System Fact Sheet NPDES MS0003115 – Mississippi Phosphates Corporation, Pascagoula, Mississippi. Jackson, MS. (July 8). DCN 02414.

MDEQ. 2002b. Mississippi Department of Environmental Quality. State of Mississippi Water Pollution Control Permit to Discharge Wastewater in Accordance with the National Pollution Discharge Elimination System NPDES MS0003115 – Mississippi Phosphates Corporation, Pascagoula, MS. Jackson, MS. (August 26). DCN 02414.

Oliver, Russell G. 2003. Telephone conversation with Russell G. Oliver of IMC Phosphates, Uncle Sam, LA, and Bob Southworth of Eastern Research Group. “SIC Code for Uncle Sam and Faustina Facilities.” (November 18). DCN 00560.

Pirkle, Billy. 2004. Telephone conversation with Billy Pirkle of Royster-Clark, Hartsville, SC, and Arash Hooshangi of Eastern Research Group. “Clarification of Manufacturing Process and Pollutant Discharges.” (January 16). DCN 00735.

Smith, Jim. 2004. Telephone conversation with Jim Smith of Mississippi Phosphates Corporation, Pascagoula, MS, and Arash Hooshangi of Eastern Research Group, Inc. “Clarification of Manufacturing Processes and Pollutant Discharges.” (January 16). DCN 00734.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1974. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Basic Fertilizer Chemicals Segment of the Fertilizer Manufacturing Point Source Category*. EPA-440/1-75/042-a. Washington, DC. (March).

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

WC&E. 2006. Wastech Controls & Engineering, Inc. Fluoride Wastewater Treatment (FWT) (HF Neutralization or Fluoride Reduction). Available online at: <http://www.wastechengineering.com/papers/hf.htm>. Date accessed: July 27. DCN 03759.

## **9.0 INORGANIC CHEMICALS MANUFACTURING (40 CFR PART 415)**

EPA selected the Inorganic Chemicals Manufacturing (Inorganic Chemicals) Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 1982). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the Inorganic Chemicals Category. EPA's 2006 annual review builds on the 2005 annual review.

EPA focused this review on discharges of dioxin and dioxin-like compounds from the Titanium Dioxide Production Subcategory, because of their high TWPE relative to the rest of the Inorganic Chemicals Category. EPA is currently reviewing discharges from the Chlor-Alkali Subcategory as part of the Chlorine and Chlorinated Hydrocarbons (CCH) ELGs rulemaking and excluded the discharges from that subcategory from this review (see Table V-1, 70 FR 51050, August 29, 2005).

### **9.1 Inorganic Chemicals Category Background**

This subsection provides background on the Inorganic Chemicals Category including a brief profile of the inorganic chemicals manufacturing industry and background on 40 CFR Part 415.

#### **9.1.1 Inorganic Chemicals Industry Profile**

The inorganic chemicals manufacturing industry includes facilities that manufacture chemicals that do not include organic carbon and its derivatives as their principal elements. The industry includes facilities within the following four SIC codes:

- 2812: Alkalies and Chlorine;
- 2813: Industrial Gases;
- 2816: Inorganic Pigments; and
- 2819: Inorganic Chemicals, Not Elsewhere Classified (NEC).

Table 9-1 lists the four SIC codes with operations in the Inorganic Chemicals Category.

**Table 9-1. Number of Facilities in Inorganic Chemicals Manufacturing SIC Codes**

| SIC Code                                   | Final Regulation (1982 and 1984) | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|--|----------------------------------|---------------------------|-----------------------|-----------------------|-----------------------|
| 2812 Alkalies and Chlorine                 | 77                               | 40                        | 6                     | 7                     | 8                     |
| 2813 Industrial Gases                      | 223                              | 568                       | 42                    | 82                    | 73                    |
| 2816 Inorganic Pigments                    | 36                               | 105                       | 24                    | 50                    | 48                    |
| 2819 Inorganic Chemicals, NEC <sup>c</sup> | 434                              | 2,396                     | 123                   | 348                   | 336                   |
| <b>Total</b>                               | <b>770</b>                       | <b>3,109</b>              | <b>195</b>            | <b>487</b>            | <b>465</b>            |

Sources: *Development Document for Effluent Limitations Guidelines and Standards for the Inorganic Chemicals Manufacturing Point Source Category* (U.S. EPA, 1982); U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIReleases2002\_v2*; *TRIReleases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>EPA identified certain facilities reporting under SIC code 2819 as subject to the Nonferrous Metals Manufacturing ELGs (see Section 5.0).

NEC - Not elsewhere classified.

Inorganic chemicals manufacturing facilities discharge directly to surface water as well as to POTWs. Table 9-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds.

**Table 9-2. Inorganic Chemicals Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code                       | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|--------------------------------|---------------------------------|-----------------------------------|--|------------------------------|
| 2812: Alkalies and Chlorine    | 0                               | 0                                 | 0  | 7                            |
| 2813: Industrial Gases         | 5                               | 1                                 | 1  | 75                           |
| 2816: Inorganic Pigments       | 12                              | 9                                 | 7  | 22                           |
| 2819: Inorganic Chemicals, NEC | 52                              | 78                                | 30   | 185                          |

Source: *TRIReleases2002\_v4*.

NEC – Not elsewhere classified.

### 9.1.2 40 CFR Part 415

EPA first promulgated ELGs for the Inorganic Chemicals Category (40 CFR Part 415) in 1974 and revised then in 1975, 1976, 1982, and 1986. The Inorganic Chemicals ELGs include 67 subcategories defined by the type of inorganic chemical product manufactured. The ELGs provide limitations guidelines for BPT, BAT, BCT, and NSPS for all subcategories, and include pretreatment standards for at least one subcategory. Table 5-6 in the 2004 Plan contains details on the pollutants regulated by subpart.

## 9.2 Inorganic Chemicals 2005 Annual Review

This subsection discusses EPA's 2005 annual review of the Inorganic Chemicals Category including the screening-level review and category-specific review.

### 9.2.1 Inorganic Chemicals 2005 Screening-Level Review

Table 9-3 compares the Inorganic Chemicals Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*. The table excludes the amount of TWPE contributed specifically by the Chlor-Alkali Subcategory.

**Table 9-3. Inorganic Chemicals Category 2005 Screening-Level Review Results**

| Rank | Point Source Category  | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | Total TWPE |
|------|--|----------------------------|----------------------------|------------|
| 8    | Inorganic Chemicals, Excluding the Chlor-Alkali Subcategory <sup>c</sup> | 139,682                    | 280,977                    | 420,659    |

Source: *2005 Annual Screening-Level Analysis* (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>The Chlor-Alkali Subcategory of the Inorganic Chemicals Category includes facilities that conduct chlor-alkali manufacturing and reported a primary SIC code associated with inorganic chemicals.

EPA is currently considering revisions to ELGs for discharges from facilities that produce chlorine by the chlor-alkali process. Because a rulemaking for the chlor-alkali sector of the Inorganic Chemicals Category is underway, discharges from these facilities were excluded from further consideration for the Inorganic Chemicals Category review under the current planning cycle.

### 9.2.2 Inorganic Chemicals Category 2005 Pollutants of Concern

Table 9-4 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. Dioxin and dioxin-like compounds contributed 27 percent of the category TWPE in *TRIRelases2002\_v2*. Five of the seven facilities that reported dioxin discharges to TRI in 2002 manufacture titanium dioxide (U.S. EPA, 2001). As a result, most of this section focuses on discharges of dioxin and dioxin-like compounds.

**Table 9-4. 2005 Annual Review: Inorganic Chemicals Category Pollutants of Concern**

| Pollutant                                 | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |                |
|---|--|-----------------------|----------------|--|-----------------------|----------------|
|   | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           |
| Dioxin and Dioxin-Like Compounds          | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 7  | 0.07                  | 74,702         |
| Sodium Nitrite                            |  |                       |                | 7  | 186,320               | 69,560         |
| Chlorine                                  | 16   | 16,915                | 8,612          | 13   | 77,654                | 39,539         |
| Lead and Lead Compounds                   | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 54   | 13,148                | 29,451         |
| Mercury and Mercury Compounds             |  |                       |                | 14   | 206                   | 24,164         |
| Iron                                      | 11   | 11,540,889            | 64,629         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                |
| Nitrogen, Nitrite Total (as N)            | 3  | 87,896                | 32,815         |  |                       |                |
| Sulfide                                   | 2  | 2,640                 | 7,396          |  |                       |                |
| Fluoride                                  | 10   | 205,338               | 7,187          |  |                       |                |
| <b>Inorganic Chemicals Category Total</b> | <b>68<sup>c</sup></b>  | <b>1,258,006,644</b>  | <b>139,682</b> | <b>198<sup>c</sup></b>   | <b>9,315,202</b>      | <b>280,977</b> |

Source: PCSLoads2002\_v2; TRIReleases2002\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

### 9.3 Potential New Subcategories for the Inorganic Chemicals Category

EPA did not identify any potential new subcategories for the Inorganic Chemicals Category.

### 9.4 Inorganic Chemicals Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Inorganic Chemicals Category. EPA obtained additional data and identified:

- Facilities classified in the wrong category;
- Changes in estimates of TWPE for dioxin and dioxin-like compounds discharges for three facilities; and
- Changes in estimates of TWPE for sodium nitrite, chlorine, nitrogen compounds.

#### **9.4.1 Inorganic Chemicals Category Facility Classification Revisions**

EPA contacted facilities that reported discharges of dioxin and dioxin-like compounds to TRI in 2002 and determined that one facility, GB Biosciences in Houston, TX, manufactures agricultural chemicals and pesticides. The discharges from this facility are subject to 40 CFR Part 455: Pesticide Chemicals rather than 40 CFR Part 415: Inorganic Chemicals (Wood, 2006). EPA changed the category classification of this facility in the revised databases, *TRIReleases2002\_v4* and *PCSLoads2002\_v4*, as described in Section 4.5 of this TSD.

#### **9.4.2 Inorganic Chemicals Category Dioxin and Dioxin-Like Compounds Discharge Revisions**

As described in Section 4.1, dioxin and dioxin-like compounds include 2,3,7,8-tetrachlordibenzo-p-dioxin (TCDD) and 16 other dioxin-like congeners. TRI requires facilities to report the total mass of the 17 congeners and allows facilities to report a single congener distribution across all media, representing the relevant percentages of each of the 17 congeners. The reported congener distribution may not represent the distribution of the congeners in wastewater. EPA contacted the facilities that reported discharges of dioxin and dioxin-like compounds to TRI in 2002 to determine how they estimated the discharges. Table 9-5 lists the facilities that EPA contacted, EPA's findings, and the resulting changes to the TRI databases.

#### **9.4.3 Inorganic Chemicals Category TWF and POTW Percent Removal Revisions**

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF and POTW percent removal values used for sodium nitrite in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373) and the POTW percent removal is now 90 percent (formerly 1.85 percent). EAD also revised the TWF used for nitrite in the TRI and PCS databases. The TWF that EAD applies for nitrite is now 0.0032 (formerly 0.373). EAD also revised the POTW percent removal values used for chlorine in the TRI databases. The POTW percent removal that EAD applies for chlorine is now 100 percent (formerly 1.87 percent). Table 9-6 presents the loads before and after corrections to the TWF and POTW percent removal for sodium nitrite, the TWF for nitrite, and the POTW percent removal for chlorine for the Inorganic Chemicals Category.

**Table 9-5. Inorganic Chemicals Category Facilities with Discharge Revisions**

| TRI ID            | Facility                            | Dioxin and Dioxin-Like Compounds Findings  | Resulting Database Change in <i>TRIReleases2002_v4</i>  |
|-------------------|-------------------------------------|--|---|
| 21226-SCMCH-3901G | Millennium Inorganic Chemicals Inc. | Facility found dioxin and dioxin-like compounds at concentrations below sample detection limits in 2004. Facility estimated discharges based on ½ the detection limit (Schildt, 2006).   | EPA revised the discharges of dioxin and dioxin-like compounds to zero pounds.  |
| 31404-KMRNC-EAST  | Kerr McGee Pigments                 | Facility never measured dioxin and dioxin-like compounds and estimates discharges based on ½ the detection limit (Dolan, 2006).  | EPA revised the discharges of dioxin and dioxin-like compounds to zero pounds.  |
| 38127-DPNTM-2571F | Du Pont Memphis Plant               | Facility analyzed wastewater for dioxin and dioxin-like compounds once in 2001 and detected one congener, 1,2,3,4,7,8,9-heptachlorodibenzo-p-dioxin at 4.7 pg/L. This measurement is below the Method 1613B minimum level. Facility assumed that undetected congeners were present at the detection limit (Zweig, 2006). | EPA revised the discharges of dioxin and dioxin-like compounds to 0.0235 pounds to reflect only the detection of 1,2,3,4,7,8,9-heptachlorodibenzo-p-dioxin. |

Source: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*;

**Table 9-6. Impact of Changes to TWF and POTW Percent Removal for the Inorganic Chemicals Category**

| Database | Pollutant                      | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|--------------------------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite                 | 6 <sup>a</sup>                            | 69,560                | 63.5                  |
| PCS 2002 | Nitrogen, Nitrite Total (as N) | 3   | 32,815                | 281                   |
| TRI 2002 | Chlorine                       | 13  | 39,539                | 2,440                 |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*; *PCSLoads2002\_v4*.

<sup>a</sup>Number of facilities reporting discharges of sodium nitrite to TRI in 2002 for the revised database, *TRIReleases2002\_v4*, increased due to moving U.S. DOE Portsmouth Gaseous Diffusion Plant from the Inorganic Chemicals Category to the Nonferrous Metals Manufacturing Category.

#### 9.4.4 Inorganic Chemicals Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings based on methodology changes as described in Section 4.2. For the Inorganic Chemicals Category, the most significant changes are also described in Section 9.4.1 through 9.4.3. Table 9-7 shows the 2006 screening-level TWPE estimated for the Inorganic Chemicals Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 9-7. Inorganic Chemicals Category 2006 Screening-Level Review**

| Point Source Category  | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|--|----------------------------|----------------------------|----------------------------|
| Inorganic Chemicals, Excluding the Chlor-Alkali Subcategory <sup>c</sup> | 107,159                    | 186,185                    | 182,427                    |

Sources: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Values exclude TWPE from the Chlor-Alkali subcategory, because EPA is investigating chlor-alkali discharges as part of the CCH rulemaking.

#### 9.4.5 Inorganic Chemicals Category 2006 Pollutants of Concern

Table 9-8 presents the pollutants of concern for the Inorganic Chemicals Category based on the 2006 annual review.

##### Manganese and Manganese Compounds Discharges

Of the Inorganic Chemicals Category's 2002 manganese and manganese compounds discharges in TRI, 91 percent were from Kerr McGee Pigments in Savannah, GA. The facility's permit does not require monitoring for manganese, and the manganese results from titanium dioxide manufacture using the sulfate process. The facility shut down its sulfate process in 2004, and its manganese releases should be significantly reduced (Dolan, 2006). The category's 2002 manganese discharges in TRI without the Kerr McGee Pigments facility account for only 6,745 TWPE.

##### Iron Discharges

Of the Inorganic Chemicals Category's 2002 iron discharges in PCS, 99 percent were from Kerr McGee Pigments in Savannah, GA. The facility's permit requires wastewater monitoring for iron but does not have limits for iron. EPA contacted the facility and determined that the iron loads result from titanium dioxide manufacture using the sulfate process. The facility shut down its sulfate process in 2004, and its iron discharges are significantly reduced (U.S. Census, 2002). The Inorganic Chemicals Category's 2002 iron discharges in PCS without the Kerr McGee Pigments facility account for only 801 TWPE.

Table 9-8. 2006 Annual Review: Inorganic Chemicals Category Pollutants of Concern<sup>a</sup>

| Pollutant                                 | 2002 PCS <sup>b</sup>  |                       |                | 2002 TRI <sup>c</sup>  |                       |                | 2003 TRI <sup>c</sup>                    |                       |                |
|---|--|-----------------------|----------------|--|-----------------------|----------------|--|-----------------------|----------------|
|   | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant | Total Pounds Released | TWPE           |
| Manganese and Manganese Compounds         | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 30   | 1,105,758             | 77,882         | 31                                       | 1,186,329             | 83,557         |
| Lead and Lead Compounds                   |  |                       |                | 54   | 13,148                | 29,451         | 57                                       | 3,128                 | 7,007          |
| Mercury and Mercury Compounds             |  |                       |                | 14   | 206                   | 24,164         | 15                                       | 164                   | 19,174         |
| Dioxin and Dioxin-Like Compounds          |  |                       |                | 4  | 0.066                 | 21,197         | 5  | 0.039                 | 22,404         |
| PCBs                                      |  |                       |                | 1  | 0.300                 | 10,210         | 2  | 0.314                 | 10,687         |
| Iron                                      | 10   | 11,540,889            | 64,629         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                |  |                       |                |
| Chlorine                                  | 13   | 16,915                | 8,612          |  |                       |                |  |                       |                |
| Sulfide                                   | 2  | 2,640                 | 7,396          |  |                       |                |  |                       |                |
| Fluoride                                  | 10   | 205,338               | 7,187          |  |                       |                |  |                       |                |
| Cadmium                                   | 7  | 91                    | 2,109          |  |                       |                |  |                       |                |
| <b>Inorganic Chemicals Category Total</b> | <b>66<sup>d</sup></b>  | <b>1,242,687,564</b>  | <b>107,159</b> | <b>195<sup>d</sup></b>   | <b>9,072,771</b>      | <b>186,185</b> | <b>201<sup>d</sup></b>                   | <b>8,831,964</b>      | <b>182,427</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Values exclude TWPE from the Chlor-Alkali Subcategory, because EPA is investigating chlor-alkali discharges as part of the CCH rulemaking.

<sup>b</sup>Discharges include only major dischargers.

<sup>c</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>d</sup>Number of facilities reporting TWPE greater than zero.

### **Lead and Lead Compounds Discharges**

Of the Inorganic Chemicals Category's 2002 lead and lead compounds discharges in TRI, 83 percent were from PCS Nitrogen Fertilizers in Geismar, LA. In 2002, this facility reported 10,862 pounds (24,331 TWPE) and in 2003 reported 140 pounds (314 TWPE). The difference in TWPE for lead and lead compounds from 2002 to 2003 in the TRI databases, as shown in Table 9-7, is due to the decrease in reported discharges of lead and lead compounds from this facility.

### **Mercury and Mercury Compounds Discharges**

Of the Inorganic Chemicals Category's 2002 mercury and mercury compounds discharges in TRI, 84 percent of the discharges are from Kerr McGee Pigments in Hamilton, MS. This facility also accounted for 75 percent of the 2003 mercury and mercury compounds discharges in TRI. EPA contacted the facility and determined that the mercury and mercury compounds discharges were from the titanium dioxide process. The facility has never analyzed for mercury in the wastewater (Dolan, 2006), and based its mercury and mercury compounds discharge estimates on the approximate amount of mercury in the rutile ore and fate and transport estimates.

### **Dioxin and Dioxin-Like Compounds Discharges**

EPA identified facilities reporting discharges of dioxin and dioxin-like compounds to TRI in 2002 and 2003 for additional review because of the TWPE associated with the discharges. Of the four facilities reporting discharges of dioxin and dioxin-like compounds to TRI in 2002, three facilities manufacture titanium dioxide.

## **9.5 Inorganic Chemicals Category Dioxin and Dioxin-Like Compounds Discharges**

As described in Section 4.1, dioxin and dioxin-like compounds include 2,3,7,8-tetrachlordibenzo-p-dioxin (TCDD) and 16 other dioxin-like congeners. Section 9.4.2 describes the changes made to the TRI 2002 databases based on EPA contact with facilities reporting discharges of dioxin and dioxin-like compounds. EPA zeroed the dioxin and dioxin-like compounds discharges for two facilities, Millennium Inorganic Chemicals Inc. and Kerr McGee Pigments, and corrected the discharge of dioxin and dioxin-like compounds for one facility, Du Pont Memphis Plant. Table 9-9 lists the facilities reporting discharges of dioxin and dioxin-like compounds to TRI in 2002 and 2003 with the products the facilities manufacture.

Table 9-9. Inorganic Chemicals Category Facilities Reporting Discharges of Dioxin and Dioxin-like Compounds to TRI

| Facility<br>(Location)                                      | Applicable Subcategory | 2002 TRI <sup>a</sup>                                  |  | 2003 TRI <sup>a</sup>                                  |  |
|---|------------------------|--|--|--|--|
|   |                        | Pounds Dioxin and<br>Dioxin-Like Compounds<br>Released | Dioxin and Dioxin-<br>Like Compounds<br>TWPE | Pounds Dioxin and<br>Dioxin-Like<br>Compounds Released | Dioxin and Dioxin-<br>Like Compounds<br>TWPE |
| Du Pont Memphis Plant<br>(Memphis, TN)                      | Hydrogen Cyanide       | 0.000001   | 0.41   | 0.000001   | 0.38   |
| Du Pont De Lisle Plant<br>(Pass Christian, MS)              | Titanium Dioxide       | NR   | NR   | 0.00002  | 1.70   |
| Du Pont Edgemoor Plant<br>(Edgemoor, DE)                    | Titanium Dioxide       | 0.03   | 60.5   | 0.002  | 208  |
| Du Pont New<br>Johnsonville Plant<br>(New Johnsonville, TN) | Titanium Dioxide       | 0.04   | 6,849  | 0.03   | 4,953  |
| Kerr-McGee Chemical,<br>LLC (Tronox)<br>(Savannah, GA)      | Titanium Dioxide       | 0.00   | 0.00   | 0.00   | 0.00   |
| Louisiana Pigment<br>Company LLC<br>(Lake Charles, LA)      | Titanium Dioxide       | 0.0004   | 14,288                                       | 0.0007   | 17,241                                       |
| Millennium Inorganic<br>Chemicals Inc.<br>(Baltimore, MD)   | Titanium Dioxide       | 0.00   | 0.00   | 0.00   | 0.00   |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

NR – Not reported.

Only one facility that reported discharges of dioxin and dioxin-like compounds to TRI in 2002 and 2003 does not manufacture titanium dioxide. This facility, Du Pont Memphis Plant in Memphis, TN, was unable to determine the source of the dioxin and dioxin-like compounds discharges. Chlorine is required to produce dioxin and dioxin-like compounds and this facility only uses sodium hypochlorite for breakpoint chlorination of its wastewater treatment system to remove cyanide from the wastewater.

For comparison purposes, Table 9-10 compares the dioxin and dioxin-like compounds discharges for the Titanium Dioxide Subcategory of the Inorganic Chemicals Category, the Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) Category, and the facilities reviewed as part of the CCH rulemaking. Compared with the 2002 TWPE from discharges from OCPSF and CCH dischargers, the total 2002 TWPE for titanium dioxide dischargers is significantly less.

**Table 9-10. Comparison of TRI TWPE from Dioxin and Dioxin-Like Compounds for 2002 and 2003 for the Titanium Dioxide Subcategory, OCPSF Category, and CCH Rulemaking**

| Point Source Category/Subcategory                                       | Dioxin and Dioxin-Like Compounds TRI TWPE |           |
|---|---|-----------|
|   | 2002                                      | 2003      |
| Titanium Dioxide Subcategory of the Inorganic Chemicals Category        | 21,197                                    | 22,404    |
| Organic Chemicals, Plastics, and Synthetic Fibers Category <sup>a</sup> | 115,132                                   | 703,572   |
| Chlorine and Chlorinated Hydrocarbons Rulemaking                        | 8,667,223                                 | 6,733,923 |

Sources: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Excludes facilities included in the CCH rulemaking.

## 9.6 Titanium Dioxide Manufacturing Subcategory

The majority of the TWPE associated with dioxin and dioxin-like compounds discharges in the TRI databases for the Inorganic Chemicals Category results from titanium dioxide manufacturers. This subsection discusses titanium dioxide manufacturing and provides more detail on available dioxin and dioxin-like compounds data.

### 9.6.1 Titanium Dioxide Manufacturing Industry Profile

Nine plants in the United States currently manufacture titanium dioxide. Because discharges reported by six of these facilities accounted for most of the TWPE from dioxin and dioxin-like compounds in EPA's 2005 annual review for the Inorganic Chemicals Category, EPA identified this subcategory for additional review. All nine facilities discharge their wastewater directly, and none have permit limits for dioxin and dioxin-like compounds. Table 9-11 lists the nine titanium dioxide manufacturing facilities, type of manufacturing process, and capacities.

**Table 9-11. United States Titanium Dioxide Manufacturers**

| Facility Name                                      | Location         | Capacity (tonnes) | Process Type <sup>a</sup> |
|--|------------------|-------------------|---------------------------|
| Du Pont De Lisle Plant                             | De Lisle, MS     | 280               | C/I                       |
| Du Pont Edge Moor Plant                            | Edge Moor, DE    | 155               | C/I                       |
| Du Pont New Johnsonville Plant                     | Johnsonville, TN | 380               | C/I                       |
| Kerr-McGee Chemical, LLC                           | Hamilton, MS     | 200               | C                         |
| Kerr-McGee Chemical, LLC (Tronox) <sup>b</sup>     | Savannah, GA     | 85                | C                         |
| Louisiana Pigment Company LLC                      | Lake Charles, LA | 120               | C                         |
| Millennium Inorganic Chemicals                     | Baltimore, MD    | 104               | C                         |
| Lyondell/Millennium Inorganic Chemicals (Plant I)  | Ashtabula, OH    | 98                | C                         |
| Lyondell/Millennium Inorganic Chemicals (Plant II) | Ashtabula, OH    | 51                | C                         |

Source: *Final Titanium Dioxide Listing Background Document for the Inorganic Chemical Listing Determination* (U.S. EPA, 2001); *Final Technical Background Document Identification Description of Mineral Processing Sectors and Waste Streams* (U.S. EPA, 1998); Telephone and e-mail correspondence with Kenneth Wood of Du Pont and Eleanor Ku Coddling of Eastern Research Group, Inc. (Wood, 2006).

<sup>a</sup>C indicates chloride and C/I indicates chloride-ilmenite process.

<sup>b</sup>Kerr-McGee's Savannah plant operated both a chloride and sulfate process until 2004, when they shut down the sulfate process.

### 9.6.2 40 CFR Part 415 Subpart V

ELGs for the Titanium Dioxide Subcategory of the Inorganic Chemicals Category (40 CFR Part 415 Subpart V) includes facilities that manufacture titanium dioxide by the sulfate process, the chloride process, and the simultaneous beneficiation-chlorination (chloride-ilmenite) process. Currently, no titanium dioxide manufacturers discharge to POTWs. The technology basis for both BPT and NSPS was physical/chemical treatment. Table 9-12 summarizes the BPT and NSPS limitations for the Titanium Dioxide Subcategory.

**Table 9-12. Titanium Dioxide Subcategory BPT and NSPS Monthly Average Limitations**

| Regulated Pollutant | BPT<br>kg/kkg (or lb per 1,000 lb) |                  |                           | NSPS<br>kg/kkg (or lb per 1,000 lb) |                  |                           |
|---------------------|------------------------------------|------------------|---------------------------|-------------------------------------|------------------|---------------------------|
|                     | Sulfate Process                    | Chloride Process | Chloride-Ilmenite Process | Sulfate Process                     | Chloride Process | Chloride-Ilmenite Process |
| TSS                 | 38                                 | 6.4              | 9.6                       | 30                                  | 4                | 2.4                       |
| Chromium            | 0.21                               | 0.03             | 0.053                     | 0.14                                | 0.012            | 0.002                     |
| Nickel              | 0.14                               | NA               | 0.035                     | 0.095                               | NA               | 0.01                      |
| Iron                | NR                                 | NR               | NR                        | 1.2                                 | 0.16             | 0.096                     |

NR – Not regulated.

NA – Not applicable. Nickel is not regulated for discharges from the chloride process.

### 9.6.3 Titanium Dioxide Manufacturing Process Description

Titanium dioxide is used as a pigment in paints, varnishes, lacquer, paper and paperboard, plastics, and personal care products (U.S. EPA, 2001). It provides whiteness and opacity in products ranging from polyvinyl chloride piping to cosmetics and sunscreen. The United States accounts for most of the world production (USGS, 2006).

Table 9-13 lists the three types of titanium dioxide manufacturing processes that reflect data reported to TRI and the type of titanium ore used. Manufacturing with lower purity ore increases the volume of impurities formed during chlorination, such as iron chlorides.

**Table 9-13. Titanium Dioxide Manufacturing Processes**

| Process Type         | Type of Ore Used                | Typical Ore Purity |
|----------------------|---------------------------------|--------------------|
| Chloride             | Rutile or high-grade ilmenite   | 95%                |
| Chloride-ilmenite    | Ilmenite (low grade acceptable) | 50 - 65%           |
| Sulfate <sup>a</sup> | Rutile or high-grade ilmenite   | 95%                |

Source: (U.S. EPA, 2001).


<sup>a</sup>Only one facility in the United States reportedly uses this process. It reported discharges to TRI in 2002 and 2003, but shut down its operation in 2004. As a result, EPA is not aware of any facilities in the United States that currently use this process.

Currently, U.S. facilities manufacture titanium dioxide using the chloride or chloride-ilmenite process. The last U.S. facility using the sulfate process, Kerr-McGee Chemical, LLC (Tronox) in Savannah, GA, shut that process down in 2004. This subsection discusses all three processes, because the sulfate process discharges are reflected in the 2002 and 2003 TRI and 2002 PCS databases.

In 2001, EPA's Office of Solid Waste (OSW) completed a study of titanium dioxide manufacturers. The information gathered during the OSW study is summarized in the document entitled *Final Titanium Dioxide Listing Background Document for the Inorganic Chemical Listing Determination* (U.S. EPA, 2001). The process descriptions that follow are based on the descriptions in the OSW listing document, as well as information from additional OSW reports and the United States Geological Survey Minerals Division.

#### Titanium Dioxide Chloride Process

Figure 9-1 shows the basics of the chloride process, which are the same as the chloride-ilmenite process. In the chloride process, facilities convert rutile or high-grade ilmenite ore into titanium tetrachloride (TiCl<sub>4</sub>) in a chlorinator. Although a fixed-bed chlorinator may be used, all U.S. facilities use a fluidized bed (U.S. EPA, 1998). Feedstocks include titanium ore, chlorine, supplied as a gas at approximately 900° C, and petroleum coke (as a reductant) (U.S. EPA, 2001).

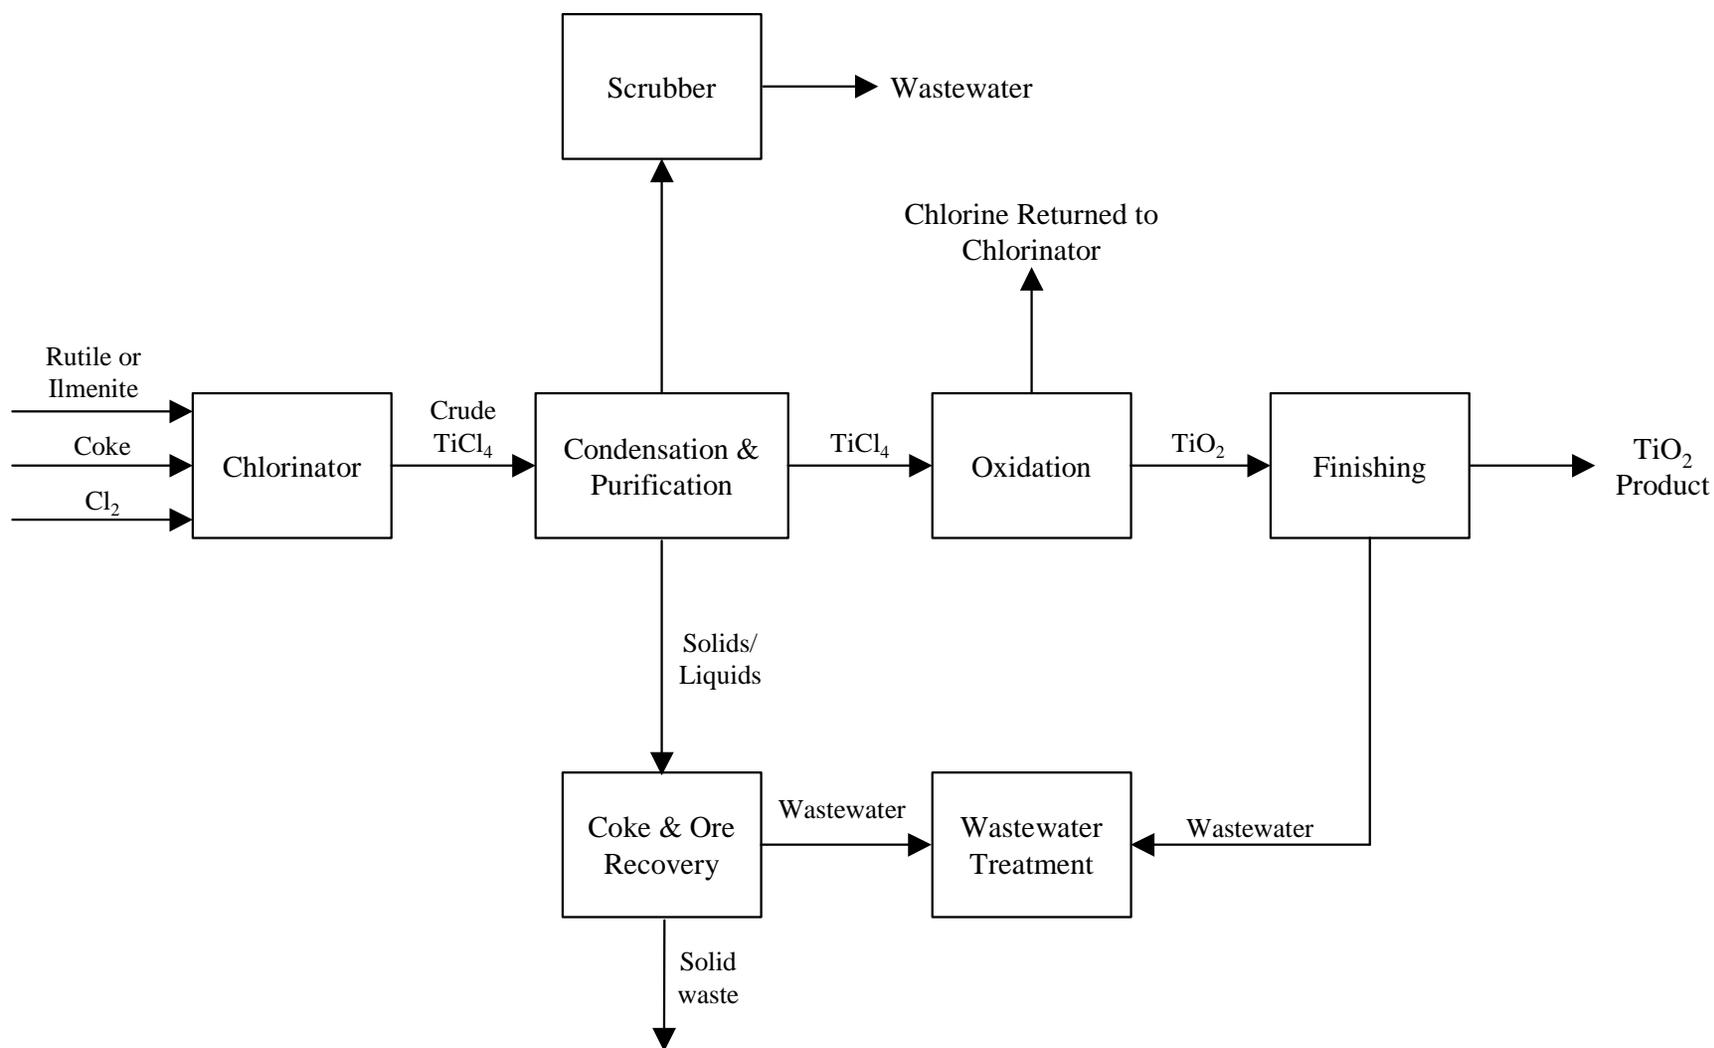

9-14

**Figure 9-1. Basic Diagram of the Chloride and Chloride-Ilmenite Processes for Titanium Dioxide Manufacture (U.S. EPA, 2001)**

The resulting  $\text{TiCl}_4$  is volatile and is piped to an oxidizer as a vapor. Impurities of metal chlorides, unreacted coke, and ore solids are removed with condensers and chemical treatment. The acidic metal chlorides, including ferric chloride ( $\text{FeCl}_3$ ), are removed as a liquid stream. Coke and ore are recovered from this stream, and the remaining solution is sent to wastewater treatment. Air emissions from the condenser are purified using water and caustic scrubbers, generating acidic wastewater. Facilities may recover hydrochloric acid from the acidic scrubber blowdown, either for use on site or for sale (U.S. EPA, 1998).

In the oxidizer, purified  $\text{TiCl}_4$  vapor is converted to  $\text{TiO}_2$ , or titanium dioxide. Facilities recycle the liberated chlorine gas from the oxidizer back to the chlorinator. The  $\text{TiO}_2$  product is conveyed in slurry form to the finisher. At the finisher, facilities grind the  $\text{TiO}_2$  and add surface treatments. Some plants generate wastewater at the finisher, most likely from air pollution control of particulate matter. Facilities sell the finished  $\text{TiO}_2$  as both a dry solid and water-based slurry (U.S. EPA, 2001).

### **Titanium Dioxide Chloride-Ilmenite Process**

Figure 9-1 shows the basics of the chloride-ilmenite process, which are the same as the chloride process. Du Pont holds a patent on the chloride-ilmenite process. This process allows the use of lower-quality ore and easier oxidation (U.S. EPA, 2001). As in the chloride process, the titanium ore is chlorinated in a fluidized-bed chlorinator, with coke used as a reducing agent. The gaseous product stream is condensed to separate the  $\text{TiCl}_4$  from other metal chloride impurities, including ferric chloride ( $\text{FeCl}_3$ ).  $\text{FeCl}_3$  is present in higher concentrations than in the chloride process because of the high iron content in the ore (U.S. EPA, 2001). Impurities are separated via condensation and chemical treatment. The process for converting  $\text{TiCl}_4$  to  $\text{TiO}_2$  is similar to that used in the chloride process as are the sources of wastewater: condenser air pollution control, metal chloride liquid waste, and, potentially, the finisher.

The principal difference between the chloride-ilmenite and chloride processes is that the Du Pont process can use lower-grade ore. Ilmenite typically contains approximately 65 percent titanium and has more iron than rutile (U.S. EPA, 2001). Du Pont's chloride-ilmenite process beneficiates the ore (U.S. EPA, 1998). There are four steps in ore beneficiation and the subsequent processing of  $\text{TiCl}_4$  (U.S. EPA, 1998):

- Step 1: In the chlorinator, ilmenite ore is mixed with chlorine gas and coke. Initially, the chlorine reacts with the iron oxide in the ilmenite ore, producing gaseous iron chlorides and enriched ilmenite ore containing more than 95 percent titanium. The beneficiated ilmenite changes color from the iron removal, but is otherwise unaltered.
- Step 2: After the chlorine and iron react, the resulting beneficiated ore converts to gaseous  $\text{TiCl}_4$  in the chlorinator.
- Step 3: A spray condenser collects iron chloride waste acids, which are sold as a by product or disposed as nonhazardous waste. As with the chloride process, the liquid metal chloride stream contains hydrochloric acid, which may be recovered (U.S. EPA, 1998).

- Step 4:  $\text{TiCl}_4$  is condensed, purified, and prepared for sale in a finisher, using the same techniques as the chloride process.

### **Titanium Dioxide Sulfate Process**

Figure 9-2 shows the basics of the sulfate process. In the sulfate process, a digester dissolves rutile slag in sulfuric acid and water, producing a titanyl sulfate liquor. In the next step, undissolved ore and solids settle out in a clarification tank. The undissolved ore and solids are disposed of as Bevill-exempt, nonhazardous waste. The clarified titanium liquor is concentrated and undergoes hydrolysis, forming titanium dioxide hydrate in solution with ferrous sulfate and sulfuric acid. The titanium dioxide hydrate is then precipitated and filtered from the ferrous sulfate and sulfuric acid ( $\text{H}_2\text{SO}_4$ ). The waste acid filtrate from this step is used in gypsum production. A calciner then heats the hydrated titanium dioxide, forming crystalline  $\text{TiO}_2$  and driving off residual water and  $\text{H}_2\text{SO}_4$ . The dried titanium dioxide is then finished, using the same techniques as the chloride process.


Wet air pollution control cleans emissions from both the digester and calciner, generating wastewater. The finishing process also generates wastewater. The digester scrubber generates sulfuric acid at a rate up to twice the product weight, and neutralization of this wastewater is costly. The last U.S. facility using the chloride process, Kerr McGee in Savannah, Georgia, shut its sulfate process down in 2004.

#### **9.6.4 Titanium Dioxide Wastewater Sources of Dioxin and Dioxin-Like Compounds**

Dioxin and dioxin-like compounds are a by-product of incomplete combustion and form when chlorine reacts with organic carbon in the presence of a metal at high temperatures (approximately  $400^\circ\text{C}$ ) (U.S. EPA, 1994). In titanium dioxide manufacturing, based on the information obtained to date, EPA concluded that dioxin and dioxin-like compounds may form in the chloride and chloride-ilmenite processes. In the chlorinator, titanium ore (containing iron impurities), chlorine gas, and petroleum coke (source of carbon) react at temperatures around  $900^\circ\text{F}$  (U.S. EPA, 2001).

Facility-reported discharges of dioxin and dioxin-like compounds from titanium dioxide manufacturers are available in TRI. EPA contacted all nine facilities to verify their TRI-reported values. Table 9-14 presents the TRI data and EPA's findings from the facility contacts.

9-17

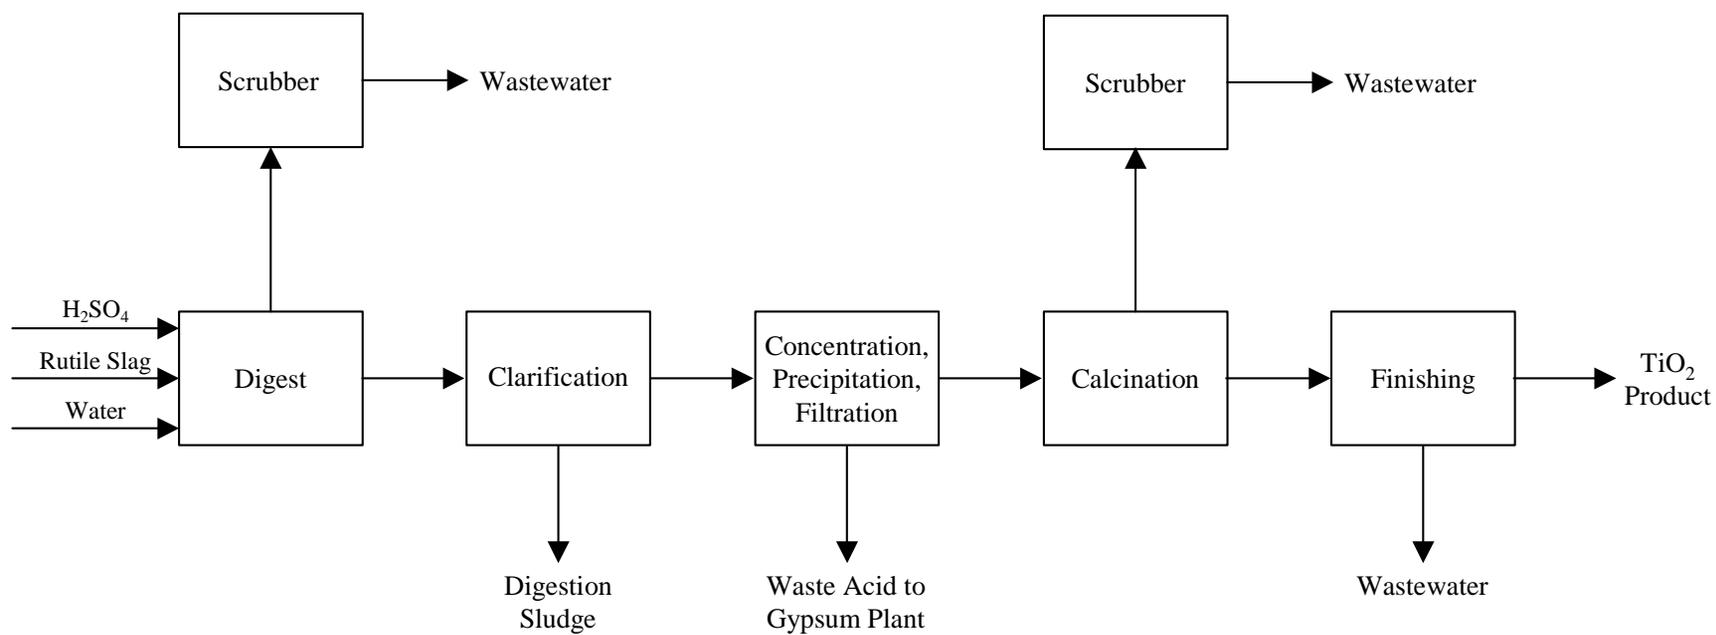

**Figure 9-2. Basic Diagram of the Sulfate Process for Titanium Dioxide Manufacture (U.S. EPA, 2001)**

Table 9-14. Titanium Dioxide Facility List and Inventory of Data Available for Dioxin and Dioxin-Like Compounds

| Facility Name                     | Location         | 2002 TRI <sup>a</sup>  |                | 2003 TRI <sup>a</sup>                   |                | Did Facility Detect Dioxin and Dioxin-Like Compounds at Any Level? | Additional Comments   |
|-----------------------------------|------------------|--|----------------|---|----------------|--|---|
|                                   |                  | g TM-17  | TWPE           | g TM-17                                 | TWPE           |  |   |
| Du Pont De Lisle Plant            | De Lisle, MS     | NR   | NR             | 0.0091                                  | 1.70           | N  | Facility analyzed wastewater twice in 2003. All congeners were below laboratory detection limits for both samples. Du Pont measured 7.3 pg/L of 1,2,3,4,6,7,8-HpCDF, but the blank for that sample had a similar result. Du Pont used 1/2 the detection limit to estimate discharges. The detected values are below the 1613B ML and are questionable because of the sample blank result. |
| Du Pont Edgemoor Plant            | Edgemoor, DE     | 13.6   | 60.5           | 0.708                                   | 208            | Y  | Facility analyzed wastewater once in 1999 and twice in 2003. Facility measured four congeners measured overall (OCDD, OCDF, HpCDF, HxCDF). Facility used 1/2 the detection limit for the other congeners.   |
| Du Pont New Johnsonville Plant    | Johnsonville, TN | 16.4   | 6,850          | 16.4                                    | 4,953          | Y  | Facility analyzed wastewater once in 2000 and once in 2003. Facility measured six congeners overall.  |
| Kerr-McGee Chemical, LLC          | Hamilton, MS     | Facility did not report any dioxin discharges to water in TRI. |                |   |                | N  | Facility analyzed wastewater for dioxin and dioxin-like compounds in their treated wastewater. All congeners were below laboratory detection limits.  |
| Kerr-McGee Chemical, LLC (Tronox) | Savannah, GA     | 0 (Facility reported 0.854) <sup>a</sup>                       | 0 <sup>a</sup> | 0 (Facility reported 2.00) <sup>a</sup> | 0 <sup>a</sup> | N  | Facility provided analytical data, which showed that all congeners of dioxin and dioxin-like compounds were below laboratory detection limits in the water. The facility filtered the water sample and analyzed those solids. Three congeners were detected in the separated solids; however, they are all at levels below the minimum level for EPA Method 1613B. <sup>a</sup>           |

Table 9-14 (Continued)

| Facility Name                                      | Location         | 2002 TRI <sup>a</sup>   |                | 2003 TRI <sup>a</sup>                     |                | Did Facility Detect Dioxin and Dioxin-Like Compounds at Any Level? | Additional Comments  |
|--|------------------|---|----------------|---|----------------|--|--|
|  |                  | g TM-17   | TWPE           | g TM-17                                   | TWPE           |  |  |
| Louisiana Pigment Company LLC                      | Lake Charles, LA | 0.166   | 14,288         | 0.330                                     | 17,241         | Y  | Facility measured dioxin and dioxin-like compounds congeners in treated process wastewater.  |
| Millennium Inorganic Chemicals                     | Baltimore, MD    | 0 (Facility reported 0.47 g) <sup>a</sup>   | 0 <sup>a</sup> | 0 (Facility reported 0.32 g) <sup>a</sup> | 0 <sup>a</sup> | N  | Facility analyzed wastewater for dioxin and dioxin-like compounds in 2004 and found all congeners were below laboratory detection limits.  |
| Lyondell/Millennium Inorganic Chemicals (Plant I)  | Ashtabula, OH    | These facilities did not report any water discharges of dioxin or dioxin-like compounds to TRI in 2002 or 2003. |                |   |                | N  | Facility reported 0.12 g TM-17 released to water in 2000 using engineering assumptions based on dioxin and dioxin-like compounds in their solid waste. Facility measured wastewater in 2001 and found all congeners below laboratory detection limits. |
| Lyondell/Millennium Inorganic Chemicals (Plant II) | Ashtabula, OH    |   |                |   |                | N  |  |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>These facilities analyzed wastewater for dioxin and dioxin-like compounds, and all measurements were below sample detection limits. The facilities estimated their water discharges of dioxin and dioxin-like compounds based on one-half the detection limit. For this analysis, EPA set those discharges to zero.

NR – Not reported. Facility did not detect dioxin or dioxin-like compounds in these years.

All nine facilities analyzed their wastewater for dioxin and dioxin-like compounds; three of these facilities found measurable concentrations:

- Louisiana Pigments in Lake Charles, LA;
- Du Pont in Edgemoor, DE; and
- Du Pont in New Johnsonville, TN.

Table 9-15 lists the analytical data obtained from the Louisiana Pigment facility, compares them to the EPA Method 1613B ML, and calculates the annual discharge for concentrations greater than the 1613B ML. Table 9-16 provides the same information for the two Du Pont facilities.

Table 9-15 shows that Louisiana Pigments measured concentrations of dioxin and dioxin-like compounds once above the 1613B minimum level in one sample from one of the outfalls tested: 109 pg/L of OCDD at Outfall 004. Based solely on this one measurement above the 1613B minimum level, EPA estimated that Louisiana Pigments discharged  $1.9 \times 10^{-10}$  g-TEQ/yr and  $8.3 \times 10^{-6}$  TWPE/yr.

Table 9-16 shows that Du Pont measured concentrations of dioxin above the 1613B minimum level once at the Edgemoor facility and twice at the New Johnsonville facility. For Edgemoor, Du Pont detected 101 pg/L OCDF. Based solely on this one measurement above the 1613B ML, EPA estimated that the Edgemoor facility discharged 0.000667 g-TEQ/yr and 29.7 TWPE/yr. For New Johnsonville, Du Pont detected approximately 100 pg/L of OCDF and 108 pg/L of OCDD. Based solely on these two measurements above the 1613B ML, EPA estimated that the New Johnsonville facility discharged 0.0182 g-TEQ/yr and 1,781 TWPE/yr.

Table 9-17 compares the TWPE estimated using all congeners detected versus only those detected above the 1613B ML, for the three facilities. This table shows that the majority of the TWPE in the TRI database from dioxin and dioxin-like compounds is estimated from measurements below the 1613B ML.

Table 9-15. Concentrations of Dioxin and Dioxin-Like Compounds in Effluent Samples (pg/L) for Louisiana Pigments

| Congener  | 1613B<br>ML | Outfall 001 <sup>a</sup> |          |          |          | Outfall 002 <sup>b</sup> |          |          |                       | Outfall 004 <sup>c</sup> |          |          |          | Outfall 004<br>Summary <sup>d</sup> |
|---|-------------|--------------------------|----------|----------|----------|--------------------------|----------|----------|-----------------------|--------------------------|----------|----------|----------|-------------------------------------|
|   |             | 11/18/01                 | 12/25/01 | 01/22/01 | 02/06/02 | 11/18/01                 | 12/25/01 | 02/06/02 | 10/26/04 <sup>e</sup> | 11/28/01                 | 01/06/02 | 02/01/02 | 10/18/04 |                                     |
| <b>Polychlorinated dibenzo-p-furans (CDFs)</b>  |             |                          |          |          |          |                          |          |          |                       |                          |          |          |          |                                     |
| 2,3,7,8-TCDF                                    | 10          | ND                       | ND       | 4.1      | ND       | 4.8                      | ND       | ND       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,7,8-PeCDF                                 | 50          | ND                       | ND       | 6.2      | ND       | 4.1                      | ND       | ND       | NA                    | ND                       | ND       | 6.8      | NA       |                                     |
| 2,3,4,7,8-PeCDF                                 | 50          | ND                       | ND       | 4.5      | ND       | 5.1                      | ND       | ND       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,7,8-HxCDF                               | 50          | 1.4                      | ND       | 4.7      | ND       | 5.6                      | ND       | 16.4     | NA                    | ND                       | ND       | 1.9      | NA       |                                     |
| 1,2,3,6,7,8-HxCDF                               | 50          | ND                       | ND       | 4        | ND       | ND                       | ND       | 15.3     | NA                    | ND                       | ND       | 2.8      | NA       |                                     |
| 2,3,4,6,7,8-HxCDF                               | 50          | ND                       | ND       | 1.9      | ND       | 4.3                      | ND       | 13.2     | NA                    | ND                       | ND       | 2.8      | NA       |                                     |
| 1,2,3,7,8,9-HxCDF                               | 50          | ND                       | ND       | 1.6      | ND       | 5.4                      | ND       | 24       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,6,7,8-HpCDF                             | 50          | ND                       | ND       | ND       | ND       | 5.4                      | ND       | 16.7     | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,7,8,9-HpCDF                             | 50          | ND                       | ND       | ND       | ND       | ND                       | ND       | 19.8     | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,6,7,8,9-OCDF                            | 100         | 7.7                      | ND       | 7.6      | ND       | 17.1                     | ND       | ND       | NA                    | ND                       | ND       | 5.9      | NA       |                                     |
| <b>Polychlorinated dibenzo-p-dioxins (CDDs)</b> |             |                          |          |          |          |                          |          |          |                       |                          |          |          |          |                                     |
| 2,3,7,8-TCDD                                    | 10          | ND                       | ND       | 3.9      | ND       | ND                       | ND       | ND       | ND                    | ND                       | ND       | ND       | ND       |                                     |
| 1,2,3,7,8-PeCDD                                 | 50          | ND                       | ND       | ND       | ND       | ND                       | ND       | ND       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,7,8-HxCDD                               | 50          | ND                       | ND       | 1.9      | ND       | 4.9                      | ND       | ND       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,6,7,8-HxCDD                               | 50          | ND                       | ND       | 3.7      | ND       | 5.9                      | ND       | ND       | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,7,8,9-HxCDD                               | 50          | ND                       | ND       | 3.4      | ND       | 6.0                      | ND       | 20.8     | NA                    | ND                       | ND       | ND       | NA       |                                     |
| 1,2,3,4,6,7,8-HpCDD                             | 50          | ND                       | ND       | 4.8      | ND       | 8.0                      | ND       | 15.6     | NA                    | ND                       | ND       | 3.4      | NA       |                                     |
| 1,2,3,4,6,7,8,9-OCDD                            | 100         | 13.9                     | 21.9     | 30.5     | ND       | 42.2                     | ND       | ND       | NA                    | 109 <sup>e</sup>         | 8.5      | 18.5     | NA       |                                     |
| <b>Grams/year</b>                               |             |                          |          |          |          |                          |          |          |                       |                          |          |          |          | <b>1.9E-06</b>                      |
| <b>Grams TEQ/year</b>                           |             |                          |          |          |          |                          |          |          |                       |                          |          |          |          | <b>1.9E-10</b>                      |
| <b>TWPE/year</b>                                |             |                          |          |          |          |                          |          |          |                       |                          |          |          |          | <b>8.3E-06</b>                      |

Analytical Data Sources: Data provided by Louisiana Pigments (Frees, 2006).

<sup>a</sup>Outfall 001 is combined process wastewater from the chlorinator and oxidizer, as well as stormwater, equipment washdown water, hydrostatic testing water, and other wastewater sources.

<sup>b</sup>Outfall 002 is process wastewater from the finishing plant.

<sup>c</sup>Outfall 004 is discharge of stormwater from the landfill area, where the facility disposes of process wastes.

<sup>d</sup>Flow value was estimated based on a monthly stormwater flow of 0.4 million gallons, or 4.8 million gallons per year.

<sup>e</sup>Concentrations greater than Method 1613B minimum level.

ND – Not detected.

ND – No data.

NA – Not applicable. Congener was not analyzed.

**Table 9-16. Concentrations of Dioxin and Dioxin-Like Compounds in Effluent Samples (pg/L) from Two Du Pont Facilities**

| Congener  | 1613B ML | Du Pont New Johnsonville | Du Pont Edgemoor    |
|---|----------|--------------------------|---------------------|
|   |          | 2003 <sup>a</sup>        | 2003 <sup>a</sup>   |
| Estimated Flow (MGY) <sup>b</sup>               |          | 235,000                  | 17,400              |
| <b>Polychlorinated dibenzo-p-furans (CDFs)</b>  |          |                          |                     |
| 2,3,7,8-TCDF                                    | 10       | ND                       | ND                  |
| 1,2,3,7,8-PeCDF                                 | 50       | ND                       | ND                  |
| 2,3,4,7,8-PeCDF                                 | 50       | ND                       | ND                  |
| 1,2,3,4,7,8-HxCDF                               | 50       | 3.32                     | 2.675               |
| 1,2,3,6,7,8-HxCDF                               | 50       | ND                       | ND                  |
| 2,3,4,6,7,8-HxCDF                               | 50       | ND                       | ND                  |
| 1,2,3,7,8,9-HxCDF                               | 50       | ND                       | ND                  |
| 1,2,3,4,6,7,8-HpCDF                             | 50       | 4.52                     | 18.27               |
| 1,2,3,4,7,8,9-HpCDF                             | 50       | 2.44                     | ND                  |
| 1,2,3,4,6,7,8,9-OCDF                            | 100      | 96.9 <sup>c</sup>        | 101.24 <sup>c</sup> |
| <b>Polychlorinated dibenzo-p-dioxins (CDDs)</b> |          |                          |                     |
| 2,3,7,8-TCDD                                    | 10       | ND                       | ND                  |
| 1,2,3,7,8-PeCDD                                 | 50       | ND                       | ND                  |
| 1,2,3,4,7,8-HxCDD                               | 50       | ND                       | ND                  |
| 1,2,3,6,7,8-HxCDD                               | 50       | ND                       | ND                  |
| 1,2,3,7,8,9-HxCDD                               | 50       | ND                       | ND                  |
| 1,2,3,4,6,7,8-HpCDD                             | 50       | 5.99                     | ND                  |
| 1,2,3,4,6,7,8,9-OCDD                            | 100      | 108.33                   | 7.335               |
| <b>Grams/year</b>                               |          | <b>182</b>               | <b>6.67</b>         |
| <b>Grams TEQ/year</b>                           |          | <b>0.0182</b>            | <b>0.000667</b>     |
| <b>TWPE/year</b>                                |          | <b>1781</b>              | <b>29.7</b>         |

Source: Telephone conversations with Tammy Burke of Louisiana Pigments and Eleanor Ku Coddling of Eastern Research Group, Inc. (Burke, 2006a; Burke, 2006b).

<sup>a</sup>Facilities provided the average of two data points for the year 2003. In the case of 1,2,3,4,6,7,8,9-OCDF for the New Johnsonville facility, EPA assumes at least one value was greater than 100 pg/L; therefore, this value is greater than the 1613B ML

<sup>b</sup>Flow values are estimated using 2003 flows reported to PCS.

<sup>c</sup>Concentrations greater than Method 1613B ML.

ML – Minimum level established for EPA Method 1613B (TIG, 2005).

ND – No data.

**Table 9-17. TWPE Comparison for Three Titanium Dioxide Manufacturers**

| Facility                            | TRI 2002 TWPE (All Congeners Detected) | TWPE For Congeners Detected Above 1613B ML Only |
|-------------------------------------|--|---|
| Louisiana Pigments Lake Charles, LA | 14,288                                 | 0.0000083                                       |
| Du Pont Edgemoor, DE                | 60.5                                   | 29.7  |
| Du Pont New Johnsonville, TN        | 6,850                                  | 1,781   |

Source: *TRIRelases2002\_v4*; Telephone and e-mail correspondence with Kenneth Wood of Du Pont and Eleanor Ku Coddling of Eastern Research Group, Inc. (Wood, 2006); Telephone conversations with Tammy Burke of Louisiana Pigments and Eleanor Ku Coddling of Eastern Research Group, Inc. (Burke, 2006a; Burke, 2006b). ML – Minimum level established for Method 1613B.

### 9.6.5 Dioxide and Dioxide-Like Compounds Wastewater Treatment and Pollution Prevention

When contacting titanium dioxide manufacturing facilities, EPA requested information on wastewater treatment and pollution prevention. Two facilities indicated they had implemented changes to reduce dioxin discharges. Although both indicated that the changes were too facility-specific to be used at other facilities, Du Pont's Edgemoor facility reported it had installed a "PBT Unit" for additional solids removal.

Table 9-18 lists the information available on wastewater treatment in place and pollution prevention used by the nine U.S. titanium dioxide manufacturers. No data were available for one facility.

### 9.7 Inorganic Chemicals Category Conclusions

- During the 2005 annual review, EPA identified sodium nitrite, chlorine, and nitrite as pollutants of concern. After changes to database methodology and facility-specific corrections, these pollutants are no longer the top pollutants in the TRI and PCS databases, based on TWPE.
- The existing ELGs for the Inorganic Chemicals Category were selected for additional review because of the high TWPE in the 2002 and 2003 TRI and 2002 PCS databases. While EPA evaluated the other pollutants of concern identified in the 2006 annual review, EPA focused its additional review on the discharge of dioxin and dioxin-like compounds from titanium dioxide manufacturing because they contributed more TWPE than any other pollutant in the 2005 annual review.

**Table 9-18. Titanium Dioxide Facilities Wastewater Treatment In Place and Pollution Prevention**

| Facility   | Location         | Wastewater Treatment in Place  |
|--|------------------|--|
| Du Pont De Lisle Plant                             | De Lisle, MS     | Neutralization, solids removal, clarification.   |
| Du Pont Edgemoor Plant                             | Edgemoor, DE     | Neutralization, solids removal, clarification. Facility added "PBT Unit" in 2001 to reduce discharge of chemicals including dioxin and dioxin-like compounds, polychlorinated biphenyls, pentachlorophenol, and hexachlorobenzene.           |
| Du Pont New Johnsonville Plant                     | Johnsonville, TN | Neutralization, solids removal, clarification.   |
| Kerr-McGee Chemical, LLC                           | Hamilton, MS     | Neutralization, solids removal, clarification.   |
| Kerr-McGee Chemical, LLC (Tronox)                  | Savannah, GA     | No data available.   |
| Louisiana Pigment Company LLC                      | Lake Charles, LA | Neutralization, solids removal, clarification.   |
| Millennium Inorganic Chemicals                     | Baltimore, MD    | Neutralization, solids removal, clarification. Facility incorporated process changes to reduce generation of dioxin and dioxin-like compounds in all media and adjustments to wastewater treatment system to improve solids removal in 2001. |
| Lyondell/Millennium Inorganic Chemicals (Plant I)  | Ashtabula, OH    | Neutralization, solids removal, clarification.   |
| Lyondell/Millennium Inorganic Chemicals (Plant II) | Ashtabula, OH    | Neutralization, solids removal, clarification.   |

Source: Facility Permits (LDEQ, 2002; MDE, 2003; MDEQ, 2005; MDEQ, 2003; OEPA, 2003a; OEPA, 2003b; TDEC, 2004); Telephone conversations with Tammy Burke of Louisiana Pigments and Eleanor Ku Coddling of Eastern Research Group, Inc. (Burke, 2006a; Burke 2006b); Telephone conversations with Thomas Dolan of Kerr McGee, Savannah, GA, and Eleanor Ku Coddling of Eastern Research Group, Inc. (Dolan, 2006); Telephone conversation with Terry Frees of Kerr McGee, Hamilton, MS, and Eleanor Ku Coddling of Eastern Research Group, Inc. (Frees, 2006); Telephone and e-mail correspondence with Kenneth Wood of Du Pont and Eleanor Ku Coddling of Eastern Research Group, Inc. (Wood, 2006).

- Dioxin and dioxin-like compounds may form during the chloride and chloride-ilmenite titanium dioxide manufacturing processes; however, most of the process wastes that contain dioxin and dioxin-like compounds are disposed of as solid waste. In some cases, dioxin and dioxin-like compounds remain in wastewater. Three titanium dioxide manufacturers reported measurable concentrations of dioxin and dioxin-like compounds in their treated effluent.
- Tables 9-15 and 9-16 compare EPA Method 1613B ML with the analytical data available for dioxin and dioxin-like compounds from the three facilities with measurable congeners of dioxin and dioxin-like compounds in their effluent. The tables show that only OCDD and OCDF were measured at levels above the 1613B ML at the three facilities. When values below the ML are set to zero, the resulting combined TWPE from dioxin and dioxin-like compounds is less than 1,900 TWPE.
- The Du Pont Edgemoor Plant in Edgemoor, DE installed additional solids removal in 2003, which has reduced discharges of dioxin and dioxin-like compounds since 2004. One other facility incorporated process changes that reduced the generation of dioxin and dioxin-like compounds and their releases across all media. When this facility measured dioxin and dioxin-like compounds in its wastewater, all congeners were below laboratory detection limits. However, titanium dioxide manufacturing facilities in the United States do not use identical processes, and according to both facilities, changes made at these two plants would not likely be appropriate for other facilities.
- Because the TWPE associated with dioxin compounds measured above the Method 1613B ML is small (1900 TWPE) EPA concludes additional study and analysis of dioxin discharges from titanium dioxide manufacturers is not warranted at this time.

## 9.8 Inorganic Chemicals Category References

Burke, Tammy. 2006a. Telephone conversations with Tammy Burke of Louisiana Pigments and Eleanor Ku Coddling of Eastern Research Group, Inc. "2002 and 2003 TRI Reporting from Louisiana Pigment's Titanium Dioxide Plant in Lake Charles, LA." (February 16). DCN 03984.

Burke, Tammy. 2006b. Telephone conversations with Tammy Burke of Louisiana Pigments and Eleanor Ku Coddling of Eastern Research Group, Inc. "2002 and 2003 TRI Reporting from Louisiana Pigment's Titanium Dioxide Plant in Lake Charles, LA." (February 23, March 20, and April 24). DCN 03983.

Dolan, Thomas. 2006. Telephone conversation with Thomas Dolan of Kerr McGee, Savannah, GA, and Eleanor Ku Coddling of Eastern Research Group, Inc. (February 10). DCN 03985.

Frees, Terry. 2006. Telephone conversation with Terry Frees of Kerr McGee, Hamilton, MS, and Eleanor Ku Coddling of Eastern Research Group, Inc. (April 19). DCN 03976.

LDEQ. 2002. Louisiana Department of Environmental Quality. Water Discharge Permit for NPDES LA0080829 – Louisiana Pigment Company, LP, Westlake, LA. Baton Rouge, LA. (June 10). DCN 02406.

MDE. 2003. Maryland Department of the Environment. Water Discharge Permit for NPDES MD0001261 – Millennium Inorganic Chemicals, Baltimore, MD. Baltimore, MD. (February 1). DCN 02404.

MDEQ. 2005. Mississippi Department of Environmental Quality. State of Mississippi Water Pollution Control Permit to Discharge Wastewater NPDES MS0002232 – Kerr-McGee Chemical Corporation, Hamilton, MS. Jackson, MS. (September 22). DCN 02401.

MDEQ. 2003. Mississippi Department of Environmental Quality. State of Mississippi Water Pollution Control Permit to Discharge Wastewater NPDES MS0027294 – Du Pont De Lisle Plant, De Lisle, MS. Jackson, MS. (July 9). DCN 02410.

OEPA. 2003a. Ohio Environmental Protection Agency. Authorization to Discharge Under the National Pollution Discharge Elimination System NPDES OH0000523 – Millennium Inorganic Chemicals Ashtabula Plant I, Ashtabula, OH. Columbus, OH. (March 20). DCN 02398.

OEPA. 2003b. Ohio Environmental Protection Agency. Authorization to Discharge Under the National Pollution Discharge Elimination System NPDES OH0000523 – Millennium Inorganic Chemicals Ashtabula Plant II, Ashtabula, OH. Columbus, OH. (March 20). DCN 02399.

Schildt, Bill. 2006. Millennium Inorganic Chemicals Inc. Letter to Ellie Coddling of Eastern Research Group, Inc. “Re: February 23, 2006 Letter from Jan Matuszko of EPA Regarding 2002 and 2003 TRI Dioxin Reported Discharges.” (March 1). DCN 03307.

TDEC. 2004. Tennessee Department of Environment and Conservation. State of Tennessee National Pollution Discharge Elimination System Permit NPDES TN0001465 – Du Pont New Johnsonville Plant, New Johnsonville, TN. Nashville, TN. (August 1). DCN 02402.

TIG. 2005. The Innovation Group. Chemical profile for titanium dioxide. Available online at: <http://www.the-innovation-group.com/chemprofile.htm>. Date accessed: September 2005. DCN 02541.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1982. *Development Document for Effluent Limitations Guidelines and Standards for the Inorganic Chemicals Manufacturing Point Source Category*. EPA-440/1-82/007. Washington, DC. (June).

U.S. EPA. 1994. Method 1613B Tetra- through Octa-Chlorinated Dioxins and Furans by Isotope Dilution HRGC/HRMS. Washington, DC. (October). DCN 03977.

U.S. EPA. 1998. *Final Technical Background Document Identification and Description of Mineral Processing Sectors and Waste Streams*. Washington, DC. (April). DCN 03330.

U.S. EPA. 2001. *Final Titanium Dioxide Listing Background Document for the Inorganic Chemical Listing Determination*. Washington, DC. (October). DCN 03331.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary 2005 Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

U.S. EPA. 2005c. *The Inventory of Sources and Environmental Releases of Dioxin-Like Compounds in the U.S.: the Year 2000 Update*. EPA/600/P-03/002A. Washington, DC. (March). Available online at: <http://www.epa.gov/ncea/pdfs/dioxin/2k-update>.

USGS. 2006. U.S. Geological Survey. *USGS Minerals Yearbook*. "Titanium and Titanium Dioxide." Available online at: <http://minerals.usgs.gov/minerals/pubs/commodity/titanium/tidiomcs06.pdf>. Date accessed: April 2006. DCN 03978.

Wood, Kenneth. 2006. E-mail correspondence with Kenneth Wood of Du Pont and Eleanor Ku Coddling of Eastern Research Group, Inc. (January and February). DCN 03326.

Zweig, Greg. 2000. Letter to Mr. Akil Al-Chokhachi, City of Memphis, from Greg Zweig, Site Environmental Coordinator, DuPont Memphis Plant. (March 13). DCN 02675.

## **10.0 NONFERROUS METALS MANUFACTURING (40 CFR PART 421)**

EPA selected the Nonferrous Metals Manufacturing (NFMM) Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review. (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 2005a). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the NFMM Category. EPA's 2006 annual review builds on the 2005 annual review. EPA identified facilities contributing the most TWPE and reviewed discharges of fluoride and cyanide from the primary aluminum industry as part of the 2006 review.

### **10.1 NFMM Category Background**

This section provides background on the NFMM Category including a brief profile of the NFMM industry and background on 40 CFR Part 421.

#### **10.1.1 NFMM Industry Profile**

The nonferrous metals manufacturing industry includes facilities that smelt and refine metals other than steel, such as aluminum, copper, and nickel (U.S. EPA, 2005b). Although facilities with many SIC codes could perform operations covered by Part 421, the main SIC codes that are covered by the NFMM ELGs are:

- 3331: Primary Smelting and Refining of Copper;
- 3334: Primary Production of Aluminum;
- 3339: Primary Smelting and Refining of Nonferrous Metals, Except Copper and Aluminum;
- 3341: Secondary Smelting and Refining of Nonferrous Metals; and
- A portion of 2819: Inorganic Chemicals, Not Elsewhere Classified (NEC).

SIC code 2819 also includes facilities subject to 40 CFR Part 415: Inorganic Chemicals Manufacturing Point Source Category. In 2004, EPA reviewed the facilities reporting under SIC code 2819 and identified six facilities that are known to perform NFMM operations, including the production of refined bauxite, alumina, slug uranium (radioactive), liquid metals, and several inorganic metals (U.S. EPA, 2004). Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census data by equivalent SIC code. The facilities in SIC code 2819 that are possibly subject to the NFMM ELGs do not correlate directly to a NAICS code, and therefore EPA could not determine the number of facilities in the 2002 U.S. Economic Census for SIC code 2819.

Table 10-1 lists the five SIC codes with operations in the NFMM Category. SIC code 3334: Primary Production of Aluminum has the largest number of facilities with data in PCS.

**Table 10-1. Number of Facilities in NFMM SIC Codes**

| SIC Code  | 2002 U.S. Economic Census  | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|----------------------------|-----------------------|-----------------------|-----------------------|
| 2819: Inorganic Chemicals, NEC <sup>c</sup>                             | NA <sup>d</sup>            | 3                     | 3                     | 4                     |
| 3331: Primary Smelting and Refining of Copper                           | 15                         | 3                     | 6                     | 5                     |
| 3334: Primary Production of Aluminum                                    | 41                         | 23                    | 21                    | 21                    |
| 3339: Primary Smelting of Nonferrous Metals, Except Copper and Aluminum | 170                        | 11                    | 30                    | 29                    |
| 3341: Secondary Smelting and Refining of Nonferrous Metals              | 417                        | 13                    | 182                   | 163                   |
| <b>Total</b>  | <b>&gt;643<sup>d</sup></b> | <b>53</b>             | <b>242</b>            | <b>221</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>EPA identified facilities known to perform NFMM operations.

<sup>d</sup>Poor bridging between NAICS and SIC codes. Number of facilities could not be determined.

NA – Not applicable.

NEC – Not elsewhere classified.

NFMM facilities discharge directly to surface water as well as to POTWs. Table 10-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds.

**Table 10-2. NFMM Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code  | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 2819: Inorganic Chemicals, NEC <sup>a</sup>                             | 3                               | 0                                 | 0  | 0                            |
| 3331: Primary Smelting and Refining of Copper                           | 1                               | 2                                 | 0  | 2                            |
| 3334: Primary Production of Aluminum                                    | 11                              | 0                                 | 2  | 8                            |
| 3339: Primary Smelting of Nonferrous Metals, Except Copper and Aluminum | 7                               | 5                                 | 3  | 14                           |
| 3341: Secondary Smelting and Refining of Nonferrous Metals              | 44                              | 23                                | 14   | 101                          |

Source: *TRIRelases2002\_v4*.

<sup>a</sup>EPA identified facilities known to perform NFMM operations.

NEC – Not elsewhere classified.

### 10.1.2 40 CFR Part 421

EPA first promulgated ELGs for the NFMM Category (40 CFR Part 421) on March 8, 1984 (49 FR 8790). Below is a brief summary of the category's ELGs. All 31 subcategories have NSPS and PSNS standards. Fourteen subcategories do not have PSES standards; the Bauxite Refining and Primary Copper Smelting Subcategories are limited to zero discharge of process wastewater under BPT, BAT, and NSPS; and EPA reserved BPT and BAT limitations for four subcategories (Secondary Indium, Secondary Mercury, Secondary Nickel, and Primary Rare Earth Metals). Most NFMM subcategories include limitations guidelines for lead, chromium, copper, arsenic, and zinc.

Section 5.3.2 of the 2004 TSD lists the regulated priority and nonconventional pollutants in the NFMM Category (U.S. EPA, 2005b).

### 10.2 NFMM Category 2005 Annual Review

This subsection discusses EPA's 2005 annual review of the NFMM Category including the screening-level review and category-specific review.

#### 10.2.1 NFMM Category 2005 Screening-Level Review

Table 10-3 presents the NFMM Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 10-3. NFMM Category 2005 Screening-Level Review Results**

| Rank | Point Source Category           | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | Total TWPE |
|------|---------------------------------|----------------------------|----------------------------|------------|
| 6    | Nonferrous Metals Manufacturing | 450,525                    | 63,694                     | 514,219    |

Source: 2005 Annual Screening-Level Analysis (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

#### 10.2.2 NFMM Category 2005 Pollutants of Concern

Table 10-4 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. The estimated TWPE from the PCS database is much greater than the TWPE from the TRI database. Cadmium contributed 28 percent of the category TRI TWPE for 2002 and approximately 22 percent of the PCS TWPE for 2002.

**Table 10-4. 2005 Annual Review: NFMM Category Pollutants of Concern**

| Pollutant                     | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |               |
|-------------------------------|--|-----------------------|----------------|--|-----------------------|---------------|
|                               | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Cadmium and Cadmium Compounds | 20   | 4,282                 | 98,997         | 7  | 789                   | 18,245        |
| Chlorine                      | 25   | 178,125               | 90,694         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |               |
| Silver                        | 9  | 3,028                 | 49,871         |  |                       |               |
| PCBs                          | 6  | 1.4                   | 48,550         |  |                       |               |
| Molybdenum                    | 5  | 237,108               | 47,763         |  |                       |               |
| Sodium Nitrite                | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 1  | 21,708                | 8,104         |
| Phosphorous                   |  |                       |                | 2  | 298                   | 6,266         |
| Arsenic and Arsenic Compounds |  |                       |                | 15   | 1,492                 | 6,031         |
| PACs                          |  |                       |                | 3  | 48                    | 4,831         |
| <b>NFMM Category Total</b>    | <b>53<sup>c</sup></b>  | <b>206,294,722</b>    | <b>450,525</b> | <b>114<sup>c</sup></b>   | <b>2,342,514</b>      | <b>63,694</b> |

Source: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

### 10.3 Potential New Subcategories for the NFMM Category

EPA did not identify any potential new subcategories for the NFMM Category.

### 10.4 NFMM Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the NFMM Category. EPA obtained additional data and identified:

- Facilities classified in the wrong category;
- Errors in how PCS loads were estimated for four facilities; and
- Changes in estimates of TWPE for sodium nitrite.

#### 10.4.1 NFMM Category Facility Classification Revisions

EPA reviewed permits for facilities in the SIC codes covered by the NFMM Category and determined that discharges from five facilities are not subject to the NFMM ELGs. EPA changed the category classifications of these facilities in the revised databases, *TRIRelases2002\_v4* and *PCSLoads2002\_v4*, as described in Section 4.5 of the TSD. Table 10-5 lists EPA's findings and corrections for these five facilities.

Table 10-5. NFMM Category Facilities Classified in Wrong Category

| TRI ID<br>(NPDES ID)                 | Facility              | Findings   | Resulting Database Change   |
|--------------------------------------|-----------------------|--|---|
| 72011-LCRKN-<br>USHIG<br>(AR0000582) | ALCOA Bauxite         | Discharges result from the reclaimed mine drainage and maintenance of the closed ALCOA and Reynolds Metals Bauxite Residue Disposal Areas. Discharges are regulated by 40 CFR Part 440: Ore Mining and Dressing (ADEQ, 2005a; ADEM, 2005b).  | Incorporated change into PCS and TRI databases. In <i>PCSLoads2002_v4</i> and <i>TRIReleases2002_v4</i> , facility loads are now included under 40 CFR Part 440.  |
| 47903-LCLFY-<br>EASTM<br>(IN0001210) | ALCOA Lafayette Works | Facility manufactures fabricated aluminum products. Discharges are regulated by 40 CFR Part 467: Aluminum Forming (IDEM, 2002; IDEM, 2001).  | Incorporated change into PCS database. In <i>PCSLoads2002_v4</i> , facility loads are now included in 40 CFR Part 467 review. No changes were made in <i>TRIReleases2002_v4</i> because the facility loads were already included under 40 CFR Part 467.               |
| 42351-CMMNW-<br>KYHWY<br>(KY0002666) | Commonwealth Aluminum | Discharges are regulated by 40 CFR Part 465: Coil Coating (KDEP, 2002).  | Incorporated change into PCS database. In <i>PCSLoads2002_v4</i> , facility loads are now included under 40 CFR Part 465. Facility reported no water discharges to TRI in 2002, so no changes were made to <i>TRIReleases2002_v4</i> .                                |
| 84006-KNNCT-<br>8362W<br>(UT0000051) | Kennecott Utah        | Facility is an integrated copper mine, smelter, and refiner producing copper anodes and cathodes, by-product sulfuric acid, and co-product gold, silver, selenium, platinum, lead carbonate, and palladium. Discharges are regulated by 40 CFR Part 440: Ore Mining and Dressing and by Part 421: Nonferrous Metals Manufacturing. The majority of the facility's TWPE are from outfalls regulated by 40 CFR Part 440 (UDEQ, Unknown). | Incorporated change into TRI database. In <i>TRIReleases2002_v4</i> , facility loads are now included under 40 CFR Part 440. No changes were made in <i>PCSLoads2002_v4</i> because the facility loads were already under 40 CFR Part 440.                            |
| 37040-SVGZN-<br>1800Z<br>(TN0029157) | Pasminco Zinc         | Facility manufactures zinc metal, co-product cadmium metal, sulfuric acid, and metallurgically valuable by-products. Permit limits are based on 40 CFR Part 421 Subpart H – Primary Zinc and Subpart I – Metallurgical Acid Plants (TDEC, 2005).   | Incorporated change into PCS database. In <i>TRIReleases2002_v4</i> , facility loads are now included under 40 CFR Part 421 instead of 40 CFR Part 440. No changes were made in <i>PCSLoads2002_v4</i> because the facility loads were already under 40 CFR Part 421. |

Source: *TRIReleases2002\_v4*; *PCSLoads2002\_v4*; Facility Permits and Fact Sheets (IDEM, 2002; IDEM, 2001; ADEQ, 2005a; ADEM, 2005b; KDEP, 2002; UDEQ, Unknown; TDEC, 2005).

### 10.4.2 NFMM Category Facility Discharge Revisions

EPA reviewed permits and discharge monitoring reports for four facilities with discharges contributing a majority of the 2002 PCS TWPE in the SIC codes covered by the NFMM Category. EPA determined that, because of assigned outfall names, *PCSLoads2002\_v2* was double counting loads from four facilities. EPA corrected the double counting in the revised database, *PCSLoads2002\_v4*, as described in Section 4.5 of this TSD. Table 10-6 lists EPA's findings and corrections for these four facilities.

**Table 10-6. NFMM Category Facilities with Discharge Revisions**

| TRI ID<br>(NPDES ID)                    | Facility                    | Double Counting Identified  | Resulting Database Change   |
|---|-----------------------------|---|---|
| 13662-LMNMC-PARKA<br>(NY0001732)        | ALCOA Massena West          | Outfalls 01B, 01D, 01E, 01F, 01H, 03A, and SUM were included in other outfalls (NYSDEC, 2003; NYSDEC, 2001).  | EPA excluded the discharges from these outfalls in <i>PCSLoads2002_v4</i> .   |
| NA <sup>a</sup><br>(TN0065081)          | ALCOA South Plant           | Outfall 006A was included in outfall 006 (TDEC, 2004b; TDEC, 2004a).  | In <i>PCSLoads2002_v4</i> , EPA revised the discharges from outfall 006, reducing the TWPE by approximately 25 percent. |
| 65440-BCKMN-HWYKK<br>(MO0000337)        | Doe Run Resources Recycling | Outfall 004 is an in-stream monitoring location (MDNR, 2004).   | In <i>PCSLoads2002_v4</i> , EPA set the discharges from outfall 004 to zero.  |
| 62024-LNCRP-LEWIS<br>(NA <sup>b</sup> ) | Olin Corporation            | Facility manufactures brass for the automotive, housing, electronics, coinage, and ammunition industries (Olin, 2000). Discharges of total phosphorous were incorrectly reported to TRI as discharges of phosphorous (yellow or white) (Reddington, 2005). Facility reports to TRI under two IDs. | In <i>TRIReleases2002_v4</i> , EPA set phosphorous (yellow or white) discharges to zero.                                |

Source: *PCSLoads2002\_v2*; *PCSLoads2002\_v4*; *TRIReleases2002\_v2*; *TRIReleases2002\_v4*; Facility Permits and Fact Sheets (MDNR, 2004; NYSDEC, 2003; NYSDEC, 2001; TDEC, 2004b; TDEC, 2004a).

<sup>a</sup>Facility does not report to TRI.

<sup>b</sup>Facility does not report to PCS.

NA – Not available.

### 10.4.3 NFMM Category TWF and POTW Percent Removal Revisions

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF and POTW percent removal values used for sodium nitrite in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373), and the POTW percent removal is now 90 percent (formerly 1.85 percent). Table 10-7 presents the loads before and after corrections to sodium nitrite TWF and POTW percent removal for the NFMM Category.

**Table 10-7. Impact of Changes to TWF and POTW Percent Removal for the NFMM Category**

| Database | Pollutant      | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|----------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite | 2 <sup>a</sup>                            | 8,104                 | 14                    |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*.

<sup>a</sup>Number of facilities reporting discharges of sodium nitrite to TRI in 2002 for the revised database, *TRIReleases2002\_v4*, increased due to moving U.S. DOE Portsmouth Gaseous Diffusion Plant from the Inorganic Chemicals Category to the NFMM Category.

### 10.4.4 NFMM Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings based on methodology changes as described in Section 4.2 and changes made based on permit review. For the NFMM Category, the most significant changes are also described in Sections 10.5.1 through 10.5.3. Table 10-8 shows the 2006 screening-level TWPE estimated for the NFMM Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 10-8. NFMM Category 2006 Screening-Level Review Results**

| Point Source Category           | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|---------------------------------|----------------------------|----------------------------|----------------------------|
| Nonferrous Metals Manufacturing | 394,881                    | 57,093                     | 78,400                     |

Source: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 10.4.5 NFMM Category 2006 Pollutants of Concern

Table 10-9 presents the pollutants of concern for the NFMM Category based on the 2006 annual review.

Table 10-9. 2006 Annual Review: NFMM Category Pollutants of Concern

| Pollutant                         | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |               | 2003 TRI <sup>b</sup>  |                       |               |
|-----------------------------------|--|-----------------------|----------------|--|-----------------------|---------------|--|-----------------------|---------------|
|                                   | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Cadmium and Cadmium Compounds     | 12   | 4,246                 | 98,153         | 7  | 987                   | 22,822        | 11   | 1,311                 | 30,296        |
| Chlorine                          | 17   | 165,958               | 84,500         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |               | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |               |
| Silver                            | 4  | 3,028                 | 49,871         |  |                       |               |  |                       |               |
| Molybdenum                        | 5  | 237,108               | 47,763         |  |                       |               |  |                       |               |
| Aluminum                          | 21   | 448,672               | 29,025         |  |                       |               |  |                       |               |
| Manganese and Manganese Compounds | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 20   | 83,684                | 5,894         | 19   | 90,809                | 6,396         |
| PACs                              |  |                       |                |  | 48                    | 4,832         | 5  | 168                   | 16,921        |
| Lead and Lead Compounds           |  |                       |                | 73   | 2,001                 | 4,483         | 70   | 3,055                 | 6,844         |
| Copper and Copper Compounds       |  |                       |                | 64   | 5,494                 | 3,488         | 58   | 6,471                 | 4,108         |
| <b>NFMM Category Total</b>        | <b>46<sup>c</sup></b>  | <b>118,048,210</b>    | <b>396,740</b> | <b>112<sup>c</sup></b>   | <b>2,397,391</b>      | <b>51,819</b> | <b>104<sup>c</sup></b>   | <b>2,755,833</b>      | <b>78,400</b> |

Source: PCSLoads2002\_v4; TRIRelases2002\_v4; TRIRelases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

#### **10.4.6 NFMM Category 2006 Top Discharging Facilities**

The PCS discharges account for approximately 88 percent of the combined TRI and PCS TWPE for 2002. The remainder of this section focuses on discharges reported to PCS in 2002. Table 10-10 lists the eight facilities in the NFMM Category with the largest discharges in PCS for 2002.

EPA obtained permits and detailed PCS data, researched facility operations, and analyzed the available pollutant discharge data for these top discharging facilities. Table 10-11 presents EPA's findings.

#### **10.5 Primary Aluminum Subcategory**

During the 2006 screening-level review, EPA determined that the Primary Aluminum Subcategory accounted for approximately 34 percent of the NFMM Category TWPE in *PCSLoads2002\_v4*. EPA noted that two facilities contributing the top pollutant loads in terms of TWPE for the NFMM Category were primary aluminum manufacturers, leading EPA to review discharges from all facilities with operations subject to the Primary Aluminum Subcategory. For this reason, Section 10.5 focuses on the Primary Aluminum Subcategory.

##### **10.5.1 Primary Aluminum Industry Profile**

Primary aluminum facilities produce aluminum by the electrolytic reduction of alumina via the Hall-Heroult Process. In addition to producing aluminum metal and various aluminum alloys, some primary aluminum facilities carry out an additional refining step to produce higher purity aluminum.

According to the U. S. Geological Survey's Minerals Industry Surveys of Primary Aluminum Plants Worldwide (USGS, 2006), conducted in 1998, 23 facilities in the United States have primary aluminum operations. Table 10-12 lists these facilities along with their current owners and operating status. All of the facilities are direct dischargers. Two are minor dischargers: Columbia Falls Aluminum (MT0030066) and ALCOA Mt. Holly (SC0036153). Primary aluminum manufacturing in the United States has decreased slightly over the past two years due to increases in energy and alumina costs (Plunkert, 2006).

**Table 10-10. 2006 Annual Review: NFMM Category Top Discharging Facilities in PCS**

| NPDES ID  | Facility Name               | Facility Location | Applicable 40 CFR Part 421 Subpart                              | Total Pounds Discharged | Total TWPE | Percentage of NFMM Category PCS 2002 TWPE |
|-----------|-----------------------------|-------------------|---|-------------------------|------------|---|
| TN0029157 | Pasminco Zinc               | Clarksville, TN   | Subpart H – Primary Zinc; Subpart I – Metallurgical Acid Plants | 1,403,459               | 73,745     | 18.6%                                     |
| IN0001155 | ALCOA Warrick               | Newburgh, TN      | Subpart B – Primary Aluminum                                    | 751,753                 | 71,361     | 18.0%                                     |
| MO0000337 | Doe Run Resources Recycling | Boss, MO          | Subpart M – Secondary Lead                                      | 5,704,134               | 51,375     | 12.9%                                     |
| LA0110931 | CS Metals of LA Inc.        | Convent, LA       | Subpart T – Secondary Molybdenum and Vanadium                   | 543,086                 | 47,309     | 11.9%                                     |
| TN0065081 | ALCOA South Plant           | Alcoa, TN         | Subpart B – Primary Aluminum                                    | 4,500,150               | 26,295     | 6.6%                                      |
| PA0002208 | Horsehead Corporation       | Monaca, PA        | Subpart G – Primary Lead  | 316,657                 | 23,274     | 5.9%                                      |
| MO0001121 | Doe Run Glover Smelter      | Annapolis, MO     | Subpart G – Primary Lead  | 2,253,820               | 21,885     | 5.5%                                      |
| PA0012751 | Zinc Corporation of America | Palmerton, PA     | Subpart H – Primary Zinc; Subpart F – Primary Copper            | 88,499                  | 13,399     | 3.4%                                      |

Source: PCSLoads2002\_v4.

Table 10-11. Top Discharging NFMM Category Facilities

| Facility                    | TWPE from Discharge of Top Pollutant (Top Pollutant) | Manufacturing and Product Information  | ELG Used for Permit  | Findings   |
|-----------------------------|--|--|--|--|
| Pasminco Zinc               | 62,362 (cadmium)                                     | Manufactures zinc metal, co-product cadmium metal, sulfuric acid, metallurgically valuable by-products   | 40 CFR Part 421 Subpart H – Primary Zinc; Subpart I – Metallurgical Acid Plants  | Process water outfall has a daily maximum cadmium limit of 3.59 lb/day and a monthly average of 1.44 lb/day. Facility is required to report discharge of cadmium from four stormwater outfalls. All of the measured cadmium concentrations for the stormwater outfalls are above Tennessee’s target storm water cadmium concentration of 0.0159 mg/L (TDEC, 2005). |
| ALCOA Warrick               | 70,011 (chlorine)                                    | Produces aluminum sheet using primary aluminum smelting (ALCOA, 2006d)   | 40 CFR Part 423: Steam Electric Power Generating Point Source Category and 40 CFR Part 421 Subpart B – Primary Aluminum (IDEM, 2004) | EPA determined the chlorine discharges, although permitted under Part 423, should be included in the NFMM Category since Part 423 does not apply to integrated power generating plants. However, because the chlorine discharges do not derive from NFMM operations, EPA will exclude the chlorine load from further review.                                       |
| Doe Run Resources Recycling | 49,556 (silver)                                      | Recycles and recovers lead from lead-acid batteries and other lead-bearing wastes with trace metal recovery, sulfuric acid manufacturing, and polyethylene plastic recycling (Doe Run Co, 2004b) | 40 CFR Part 421 Subpart M – Secondary Lead   | Silver discharges are limited to 0.013 mg/L daily maximum for all the outfalls (MDNR, 2003b; MDNR, 2003a). Discharges of silver decreased by 99 percent from 2002 to 2005.   |
| CS Metals of LA Inc.        | 42,576 (molybdenum)                                  | Recovers molybdenum oxide, vanadium oxide, and alumina from petrochemical catalysts  | 40 CFR Part 421 Subpart T – Secondary Molybdenum and Vanadium  | Permit does not include molybdenum limits, but the facility is required to report discharges (LDEQ, 2002). U. S. GS Mineral Industry Survey for Vanadium reported the facility closed in December 2004 (U. S. GS, 2005). Discharges of molybdenum have decreased tenfold from 2002 to 2005. EPA will exclude this facility’s discharges from future reviews.       |

Table 10-11 (Continued)

| Facility                    | TWPE from Discharge of Top Pollutant (Top Pollutant) | Manufacturing and Product Information  | ELG Used for Permit  | Findings   |
|-----------------------------|--|--|--|--|
| ALCOA South Plant           | 25,441 (aluminum)                                    | Produces aluminum sheet using primary aluminum smelting (ALCOA, 2006c)                                       | 40 CFR Part 421 Subpart B – Primary Aluminum Smelting (q) Direct Chill Casting Contact Cooling | Permit includes aluminum limits for all outfalls and facility is required to monitor aluminum in stormwater (TDEC, 2004a), (TDEC, 2004b). Approximately 98 percent of the aluminum discharges reported to PCS in 2002 are from stormwater outfalls and are above Tennessee’s target storm water aluminum concentration of 0.75 mg/L (U.S. EPA, 1989; Janjic, 2006).  |
| Horsehead Corporation       | 13,016 (chlorine)                                    | Manufactures zinc metal and zinc oxides (PDEP, 2001a)  | 40 CFR Part 423: Steam Electric Power Generating Point Source Category and 40 CFR Part 421     | EPA determined the chlorine discharges, although permitted under Part 423, should be included in the NFMM Category since Part 423 does not apply to integrated power generating plants. However, because the chlorine discharges do not derive from NFMM operations, EPA will exclude the chlorine load from further review.   |
| Doe Run Glover Smelter      | 20,229 (cadmium)                                     | Produces lead  | 40 CFR Part 421 Subpart G – Primary Lead   | Operations at the Doe Run Glover Smelter were suspended in December 2003 due to decreased U.S. lead demand. The facility is in “care and maintenance” status to ensure it can be quickly restarted if the demand for lead increases (Doe Run Co, 2004a). The facility has a current NPDES permit but EPA believes the facility is not currently discharging (MDNR, 2005). EPA will exclude discharges from this facility from future review because the facility is not operating. |
| Zinc Corporation of America | 11,285 (cadmium)                                     | Produces powder zinc and copper-based alloys and concentrated zinc material for smelting at other facilities | 40 CFR Part 421 Subpart H – Primary Zinc and Subpart F – Primary Copper                        | Cadmium permit limits are 0.20 mg/L daily maximum and 0.10 mg/L monthly average (PDEP, 2001b). The facility consistently discharges cadmium below the permitted levels for the outfalls with cadmium limits and the monitor-only outfalls.   |

Source: PCSLoads2002\_v2; Facility Permits and Fact Sheets (MDNR, 2003b; MDNR, 2003a; TDEC, 2004b; TDEC, 2004a; TDEC, 2005; IDEM, 2004; LDEQ, 2002; PDEP, 2001a; MDNR, 2005; PDEP, 2001b); “ALCOA Warrick Operations” (ALCOA, 2006d); “Boss, MO” (Doe Run Co, 2005b); “Vanadium in January 2005” (U.S. GS, 2005); “ALCOA Tennessee Operations” (ALCOA, 2006c); *Development Document for Effluent Limitations Guidelines and Standards for the Nonferrous Metals Manufacturing Point Source Category Vol. II* (U.S. EPA, 1989); “Glover, MO” (Doe Run Co, 2004a).

Table 10-12. U.S. Primary Aluminum Facilities Owners and Operating Status

| NPDES ID  | Facility Name                          | Location           | Company                        | Operating Status <sup>a</sup> |
|-----------|--|--------------------|--------------------------------|-------------------------------|
| IN0001155 | ALCOA Warrick                          | Evansville, IN     | ALCOA                          | Reduced capacity              |
| KY0001821 | Alcan Sebree                           | Sebree, KY         | Alcan                          | Operating                     |
| KY0004278 | National Southwire Aluminum Hawesville | Hawesville, KY     | Southwire                      | Operating                     |
| MD0002429 | Eastalco Aluminum                      | Frederick, MD      | ALCOA                          | Operating                     |
| MO0105732 | Noranda Aluminum                       | New Madrid, MO     | Noranda Incorporated           | Operating                     |
| MT0030066 | Columbia Falls Aluminum                | Columbia Falls, MO | Glencore Group                 | Reduced capacity              |
| NC0004308 | ALCOA Badin Works                      | Badin, NC          | ALCOA                          | Reduced capacity              |
| NY0000132 | ALCOA Massena East                     | Massena, NY        | ALCOA                          | Operating                     |
| NY0001732 | ALCOA Massena West                     | Massena, NY        | ALCOA                          | Operating                     |
| OH0011550 | Ormet Hannibal                         | Hannibal, OH       | Ormet Corp.                    | Operating                     |
| OR0000060 | ALCOA Troutdale                        | Troutdale, OR      | ALCOA                          | Closed                        |
| OR0001708 | Northwest Aluminum Specialties         | The Dalles, OR     | Northwest Aluminum Specialties | Operating                     |
| SC0036153 | ALCOA Mt. Holly                        | Mt. Holly, SC      | ALCOA and Century Aluminum     | Operating                     |
| TN0065081 | ALCOA South Plant                      | Alcoa, TN          | ALCOA                          | Operating                     |
| TX0004715 | ALCOA Point Comfort                    | Rockdale, TX       | ALCOA                          | Operating                     |
| WA0000299 | Evergreen Aluminum                     | Vancouver, WA      | Glencore Group                 | Closed                        |
| WA0000680 | ALCOA Wenatchee Works                  | Wenatchee, WA      | ALCOA                          | Operating                     |
| WA0000086 | Longview Aluminum                      | Longview, WA       | Longview Aluminum              | Closed                        |
| WA0000876 | CVB Northwest                          | Mead, WA           | Commercial Development Company | Reduced capacity              |
| WA0000931 | Port of Washington                     | Tacoma, WA         | Port of Washington             | Closed                        |
| WA0000540 | Goldendale Aluminum                    | Goldendale, WA     | Goldendale Aluminum Company    | Closed                        |
| WA0002950 | Intalco Works                          | Ferndale, WA       | ALCOA                          | Reduced capacity              |
| WV0000779 | Century Aluminum                       | Ravenswood, WA     | Century Aluminum Company       | Operating                     |

Source: “ALCOA Warrick Operations – Evansville” (ALCOA, 2006d); *ALCOA Takes Full Ownership of Intalco and Eastalco Smelters in Washington and Maryland; Signs Agreement for NW Power* (ALCOA, 2006b); “Aluminum, Alumina, and Bauxite” (Glencore, 2006); *ALCOA Badin Works* (ALCOA, 2006a); “ALCOA Begins Troutdale Site Restoration” (ALCOA, 2003); “Smelters Final Hopes Melt” (Forgey, 2004); “Port Prepares to Demolish Kaiser Smokestack” (Port of Tacoma, 2000).

<sup>a</sup>Closed means facilities that were idle and facilities that were dismantled. Reduced capacity means facilities that were not operating at full production capacity.

### 10.5.2 40 CFR Part 421 Subpart B

Subpart B of 40 CFR Part 421 regulates direct and indirect discharges from primary aluminum manufacturers. This subcategory is divided into 17 subparts defined by production process. Each subpart includes production-normalized BPT and BAT limitations guidelines. For example, the BAT effluent limitation for aluminum for Subpart (r) – Continuous Rod Casting Contact Cooling is 0.282 mg/kg of aluminum product from rod casting. Table 10-13 summarizes the BAT treatment effectiveness concentrations used to develop the limitations in Part 421 Subpart B. Subparts (a) through (m) also include NSPS and PSNS.

**Table 10-13. Primary Aluminum Subcategory BAT Treatment Effectiveness Concentrations**

| Pollutant      | One-Day Maximum (mg/L) | 30-Day Average (mg/L) |
|----------------|------------------------|-----------------------|
| Aluminum       | 7.8                    | 3.5                   |
| Antimony       | 12.0                   | 5.4                   |
| Benzo(a)pyrene | 0.0337                 | 0.0156                |
| Cyanide        | 4.5                    | 2.0                   |
| Fluoride       | 59.5                   | 26.4                  |
| Nickel         | 2.3                    | 1.0                   |
| TSS            | 61.5                   | 27.3                  |

Source: *Development Document for Effluent Limitations Guidelines and Standards for the Nonferrous Metals Manufacturing Point Source Category Vol II* (U.S. EPA, 1989).

The basis for the existing BAT ELGs for the Primary Aluminum Subcategory is:

- In-process recycling of air pollution wastewater and contact cooling water;
- Lime precipitation and sedimentation;
- Multimedia filtration; and
- Cyanide precipitation (U.S. EPA, 1989).

### 10.5.3 Primary Aluminum 2006 Pollutants of Concern

Table 10-14 presents the top five pollutants reported to PCS in 2002 by primary aluminum facilities and the number of facilities for which the 2002 discharge load is greater than zero. The top five pollutants account for approximately 96 percent of the Primary Aluminum Subcategory's discharges in PCS for 2002.

#### Chlorine Discharges

Of the Primary Aluminum Subcategory's 2002 chlorine discharges in PCS, approximately 98 percent were from the ALCOA Warrick facility. Because these chlorine discharges do not derive from NFMM operations, as described in Table 10-11, the chlorine load is excluded from further review.

**Table 10-14. 2006 Annual Review: Primary Aluminum Subcategory Pollutants of Concern**

| <b>Pollutant</b>                          | <b>Number of Facilities with Discharge Greater than Zero</b> | <b>Total Pounds Discharged</b> | <b>TWPE</b>    | <b>Percentage of Subcategory TWPE</b> | <b>Percentage of Category TWPE</b> |
|---|--|--------------------------------|----------------|---------------------------------------|------------------------------------|
| Chlorine                                  | 14   | 139,942                        | 71,253         | 53.4%                                 | 18.0%                              |
| Aluminum                                  | 18   | 446,539                        | 28,887         | 21.7%                                 | 7.3%                               |
| Fluoride                                  | 19   | 462,328                        | 16,182         | 12.1%                                 | 4.1%                               |
| Cyanide                                   | 13   | 7,614                          | 8,504          | 6.4%                                  | 2.1%                               |
| PCB-1248                                  | 1  | 0.4                            | 3,527          | 2.6%                                  | 0.9%                               |
| <b>Primary Aluminum Subcategory Total</b> |  | <b>1,603,333</b>               | <b>133,426</b> |                                       | <b>32.4%</b>                       |

Source: PCSLoads2002\_v4.

### **Aluminum Discharges**

Of the Primary Aluminum Subcategory's 2002 aluminum discharges in PCS, 88 percent were from the ALCOA South Plant. As described in Table 10-11, 98 percent of the aluminum discharges that the ALCOA South Plant reported to PCS in 2002 are from stormwater outfalls. EPA determined discharges applicable to the Primary Aluminum Subcategory would not include stormwater: "...stormwater is or can be segregated from the process wastewater" (U.S. EPA, 1989). EPA determined stormwater discharges from primary aluminum manufacturing facilities should be "addressed on a case-by-case basis by the permit writer" (U.S. EPA, 1989). The ALCOA South Plant facility is required to monitor aluminum in their stormwater. The reported concentrations of aluminum in the stormwater (1.08 mg/L to 47.3 mg/L for all the stormwater outfalls) are discharged above the Tennessee target stormwater aluminum concentration of 0.75 mg/L (TDEC, 2004a; TDEC, 2004b). For two of the facility's stormwater outfalls, the aluminum concentrations are above the Primary Aluminum Subcategory BAT treatment effectiveness concentration of 7.8 mg/L daily maximum (U.S. EPA, 1989).

### **Fluoride and Cyanide Discharges**

EPA identified the Primary Aluminum Subcategory for additional review, in part, because of the large number of facilities reporting discharges of fluoride and cyanide. Of the 23 primary aluminum facilities, 21 report discharges of fluoride and 19 report discharges of cyanide. Section 10.5.4 and 10.5.5 present the results of additional reviews of the fluoride and cyanide discharges. No one facility discharges a majority of the fluoride or cyanide.

### **PCB-1248 Discharges**

The ALCOA Massena West facility is the only facility in the Primary Aluminum Subcategory for which PCS includes data for 2002 discharges of PCB-1248. Because the facility has not reported discharges of PCB-1248 since January 2004, EPA did not collect any additional information about this pollutant.

#### 10.5.4 Primary Aluminum Wastewater Sources of Fluoride

This subsection describes the primary aluminum manufacturing process and the generation of fluoride-containing wastewater. Primary aluminum smelting takes place in electrolytic cells, in which alumina, the principle ore of aluminum, is dissolved in molten cryolite ( $\text{Na}_3\text{AlF}_6$ ). The cells are heated to approximately 950°F and an electrical current is passed through the molten cryolite to force the aluminum ions to migrate to the cathode, where they are reduced to aluminum metal. Because the reduced molten aluminum is heavier than the molten cryolite, the molten aluminum forms a layer at the bottom of the cell. The electrolytic cells emit gases containing fluoride compounds that are collected in hoods above the cells. The collected gases are treated using dry air scrubbing or wet scrubbing processes, which generate wastewater. The molten aluminum, collected in the bottoms of the cells, is sent for further refining and alloying. Refining consists of fluxing to remove impurities and degassing to remove trapped hydrogen gas from the molten aluminum. The refined aluminum is typically cast into ingots or billets (U.S. EPA, 1989).

In the electrolytic cells, called the pot liner, the anode is made of coal tar pitch and coke, while the cathode is the carbon lining of the cell. The anodes are consumed when the negative charge (electrons) is transferred to the aluminum ions to reduce the aluminum. Therefore, the anodes must be replaced and recycled periodically when they become too small to be effective. In the recycling process, the anodes are crushed and made into paste, which is formed into briquettes and baked to create new anodes. The recycled anodes contain impurities that collect on them in the cells. Fluoride, one of the impurities, is released as gas when the recycled anodes are baked. The emissions are treated using dry or wet scrubbing processes. The pot liners can also be reprocessed to reduce the amount of hazardous waste generated. The pot liners are ground and leached with caustic to solubilize the fluoride deposits. The solids are removed from the leaching solution using sedimentation. Sodium aluminate ( $\text{NaAlO}_2$ ) is added to the solution to precipitate cryolite ( $\text{Na}_3\text{AlF}_6$ ). The resulting cryolite precipitate is recovered for use in the electrolytic cells. Lime is added to the remaining solution to precipitate calcium fluoride ( $\text{CaF}_2$ ). The remaining solution is then used as the leachate at the beginning of the pot liner reprocessing (U.S. EPA, 1989).

The air pollutants emitted during primary aluminum smelting are particulates, sulfur dioxide ( $\text{SO}_2$ ), carbon monoxide (CO), carbon dioxide ( $\text{CO}_2$ ), tars, oils, and fluoride compounds. The dry air scrubbing process uses sandy alumina, prior to its use in the electrolytic cells. The scrubber process removes pollutants from exhaust gases and recovers them for reuse in the process. Dry air scrubbing cannot be used for the manufacture of high purity alloys because using the alumina in the scrubber concentrates the impurities, reducing the quality of the metal produced. The wet air scrubbing process generates large wastewater discharges containing fluoride and TSS. The wastewater generation can be reduced by adding lithium carbonate to electrolytic cells. The lithium carbonate reduces the fluoride compound emissions and power consumption, and it increases aluminum production by controlling the physical properties such as melting point, electrical conductivity, and density (U.S. EPA, 1989).

Table 10-15 lists the primary aluminum facilities that reported discharges of fluoride to PCS in 2002.

EPA obtained additional, detailed PCS concentration data for 14 of the 21 primary aluminum facilities that reported discharges of fluoride to PCS in 2002. The remaining facilities reported quantities (e.g., pounds per day) of fluoride to PCS in 2002. Table 10-16 presents the reported average concentrations of fluoride discharged by these facilities for outfalls that were included in *PCSLoads2002\_v4*.

The median fluoride concentrations reported by primary aluminum facilities, as shown in Table 10-16, are all less than the fluoride BAT treatment effectiveness concentrations of 26.5 mg/L monthly average (U.S. EPA, 1989). The current treatment technologies perform better than the “best” treatment (BAT) at the time the existing ELGs were developed.

### **10.5.5 Primary Aluminum Wastewater Sources of Cyanide**

The high temperatures and reducing environment found in aluminum electrolytic cells induce the formation of cyanide. Cyanide gas is emitted from the cells and treated with other off gases using dry air scrubbing or wet scrubbing processes. Pot liner reprocessing also generates cyanide-bearing wastewater (U.S. EPA, 1989).

Table 10-17 lists the primary aluminum facilities with cyanide discharges in PCS for 2002.

EPA obtained additional, detailed PCS concentration data for 8 of the 19 primary aluminum facilities with cyanide discharges in PCS for 2002. The remaining facilities reported discharges of cyanide as quantities (e.g., pounds per day) to PCS in 2002. Table 10-18 presents the reported average concentrations of cyanide discharged by these facilities.

The median cyanide concentrations reported by primary aluminum facilities, as shown in Table 10-18, are all well below the cyanide BAT treatment effectiveness concentrations, 2.0 mg/L monthly average and 4.5 mg/L daily maximum (U.S. EPA, 1989).

**Table 10-15. Primary Aluminum Facilities with Fluoride Discharges in PCS for 2002**

| NPDES ID                         | Facility                               | Location      | Pounds Discharged | TWPE          | Percentage of Total Fluoride TWPE |
|----------------------------------|--|---------------|-------------------|---------------|-----------------------------------|
| MD0002429                        | Eastalco Aluminum                      | Frederick     | 89,362            | 3,128         | 19.3%                             |
| TX0004715                        | ALCOA Point Comfort                    | Point Comfort | 73,776            | 2,582         | 16.0%                             |
| MO0105732                        | Noranda Aluminum                       | New Madrid    | 65,280            | 2,285         | 14.1%                             |
| WV0000779                        | Century Aluminum                       | Ravenswood    | 52,840            | 1,849         | 11.4%                             |
| WA0002950                        | Intalco Works                          | Ferndale      | 29,401            | 1,029         | 6.4%                              |
| NY0000132                        | ALCOA Massena East                     | Massena       | 25,869            | 905           | 5.6%                              |
| NY0001732                        | ALCOA Massena West                     | Massena       | 20,131            | 705           | 4.4%                              |
| IN0001155                        | ALCOA Warrick                          | Newburgh      | 16,727            | 585           | 3.6%                              |
| TN0065081                        | ALCOA South Plant                      | Alcoa         | 16,715            | 585           | 3.6%                              |
| WA0000540                        | Goldendale Aluminum                    | Goldendale    | 15,741            | 551           | 3.4%                              |
| NC0004308                        | ALCOA Badin Works                      | Badin         | 14,681            | 514           | 3.2%                              |
| OH0011550                        | Ormet Hannibal                         | Hannibal      | 12,716            | 445           | 2.8%                              |
| KY0004278                        | National Southwire Aluminum Hawesville | Robards       | 12,627            | 442           | 2.7%                              |
| OR0000060                        | ALCOA Troutdale                        | Troutdale     | 7,110             | 249           | 1.5%                              |
| WA0000931                        | Port of Washington                     | Tacoma        | 3,621             | 127           | 0.8%                              |
| WA0000299                        | Evergreen Aluminum                     | Vancouver     | 3,072             | 108           | 0.7%                              |
| OR0001708                        | Northwest Aluminum Specialties         | The Dalles    | 1,770             | 62            | 0.4%                              |
| WA0000680                        | ALCOA Wenatchee Works                  | Malaga        | 720               | 25            | 0.2%                              |
| WA0000876                        | CVB Northwest                          | Mead          | 170               | 6             | 0.04%                             |
| KY0001821                        | Alcan Sebree <sup>a</sup>              | Hawesville    | 0                 | 0             | 0.0%                              |
| WA0000086                        | Longview Aluminum <sup>b</sup>         | Longview      | 0                 | 0             | 0.0%                              |
| <b>Total Fluoride Discharges</b> |  |               | <b>462,328</b>    | <b>16,181</b> |                                   |

Source: PCSLoads2002\_v4.

<sup>a</sup>Permit limits fluoride discharges for one outfall that had no discharge in 2002.

<sup>b</sup>Facility reports concentration of fluoride but does not report outfall flow, so a fluoride load was not calculated in PCSLoads2002\_v4.

Table 10-16. Primary Aluminum Facilities, Fluoride Concentrations Reported to PCS in 2002

| NPDES ID  | Facility Name                    | Minimum Average Concentration <sup>a</sup><br>(mg/L) | Maximum Average Concentration <sup>a</sup><br>(mg/L) | Median Average Concentration <sup>a</sup><br>(mg/L) | Date Range      |
|-----------|----------------------------------|--|--|---|-----------------|
| MO0105732 | Noranda Aluminum                 | 8.90   | 21.05  | 15.00   | 1/2002 – 3/2006 |
| WA0002950 | Intalco Works                    | 5.00   | 26.00  | 14.00   | 1/2002 – 2/2003 |
| OH0011550 | Ormet Hannibal                   | 9.84   | 15.20  | 13.33   | 1/2002 – 3/2004 |
| WA0000876 | CVB Northwest                    | 10.45  | 14.50  | 12.48   | 1/2002 – 1/2003 |
| MD0002429 | Eastalco Aluminum                | 4.64   | 18.60  | 12.40   | 1/2002 – 2/2006 |
| WA0000299 | Evergreen Aluminum <sup>b</sup>  | 3.80   | 5.50   | 4.55  | 1/2002 – 2/2003 |
| WA0000086 | Longview Aluminum <sup>b,c</sup> | 0.40   | 4.00   | 1.40  | 1/2002 – 2/2003 |
| NC0004308 | ALCOA Badin Works                | 0.24   | 33.00  | 1.25  | 8/2004 – 2/2006 |
| NY0000132 | ALCOA Massena East               | 0.20   | 35.00  | 0.45  | 8/2004 – 3/2006 |
| IN0001155 | ALCOA Warrick                    | 2.02   | 3.97   | 2.90  | 1/2002 – 8/2004 |
| TN0065081 | ALCOA South Plant <sup>b,d</sup> | 0.25   | 20.40  | 1.90  | 2/2002 – 4/2006 |
| WA0000931 | Port of Washington               | 1.03   | 27.40  | 2.81  | 1/2002 – 2/2003 |
| WV0000779 | Century Aluminum                 | 0.05   | 12.60  | 0.91  | 2/2002 – 9/2002 |
| OR0000060 | ALCOA Troutdale                  | 0.20   | 2.20   | 0.90  | 1/2002 – 4/2003 |

Source: Envirofacts.

<sup>a</sup>Concentrations are total fluoride, unless otherwise specified. EPA determined discharges reported as “0” and with “<” signs in Envirofacts were nondetects and excluded them from the facility’s concentrations. EPA included fluoride concentrations from all reported outfalls in this analysis.

<sup>b</sup>Concentrations are reported maximums. Facilities did not report average concentrations.

<sup>c</sup>Facility reports concentration of fluoride but does not report outfall flow, so a fluoride load was not calculated in *PCSLoads2002\_v4*.

<sup>d</sup>Concentrations are dissolved fluoride.

Table 10-17. Primary Aluminum Facilities with Cyanide Discharges in PCS for 2002

| NPDES ID                        | Facility                                    | Location      | Pounds Discharged | TWPE         | Percentage of Total Cyanide TWPE |
|---------------------------------|---|---------------|-------------------|--------------|----------------------------------|
| NC0004308                       | ALCOA Badin Works                           | Badin         | 3,380             | 3,775        | 44.4%                            |
| WV0000779                       | Century Aluminum                            | Ravenswood    | 2,460             | 2,748        | 32.3%                            |
| OH0011550                       | Ormet Hannibal                              | Hannibal      | 1,181             | 1,319        | 15.5%                            |
| KY0001821                       | Alcan Sebree                                | Hawesville    | 222               | 248          | 2.9%                             |
| NY0000132                       | ALCOA Massena East                          | Massena       | 120               | 134          | 1.6%                             |
| TN0065081                       | ALCOA South Plant                           | Alcoa         | 85                | 95           | 1.1%                             |
| NY0001732                       | ALCOA Massena West                          | Massena       | 83                | 93           | 1.1%                             |
| OR0000060                       | ALCOA Troutdale                             | Troutdale     | 29                | 33           | 0.4%                             |
| IN0001155                       | ALCOA Warrick                               | Newburgh      | 28                | 31           | 0.4%                             |
| WA0002950                       | Intalco Works                               | Ferndale      | 20                | 22           | 0.3%                             |
| WA0000299                       | Evergreen Aluminum                          | Vancouver     | 4                 | 5            | 0.1%                             |
| MD0002429                       | Eastalco Aluminum                           | Frederick     | 2                 | 3            | 0.03%                            |
| TX0004715                       | ALCOA Point Comfort <sup>a</sup>            | Point Comfort | 0                 | 0            | 0.0%                             |
| MO0105732                       | Noranda Aluminum <sup>a</sup>               | New Madrid    | 0                 | 0            | 0.0%                             |
| OR0001708                       | Northwest Aluminum Specialties <sup>a</sup> | The Dalles    | 0                 | 0            | 0.0%                             |
| WA0000086                       | Longview Aluminum <sup>a</sup>              | Longview      | 0                 | 0            | 0.0%                             |
| WA0000680                       | ALCOA Wenatchee Works <sup>a</sup>          | Malaga        | 0                 | 0            | 0.0%                             |
| WA0000876                       | CVB Northwest <sup>a</sup>                  | Mead          | 0                 | 0            | 0.0%                             |
| WA0000931                       | Port of Washington <sup>a</sup>             | Tacoma        | 0                 | 0            | 0.0%                             |
| <b>Total Cyanide Discharges</b> |   |               | <b>7,614</b>      | <b>8,504</b> |                                  |

Source: PCSLoads2002\_v4; Envirofacts; Facility permits (TNRCC, 1996; MDNR, 2004; ODEQ, 2005; WDE, 2002; WDE, 1997; WDE, 2001b; WDE, 2000; WDE, 2001c; WDE, 2002; WDE, Unknown).

<sup>a</sup>Permits include cyanide limits or monitoring requirements. Discharges of cyanide were reported below the detection limit or were not provided on Envirofacts for 2002.

Table 10-18. Primary Aluminum Facilities, Cyanide Concentrations Reported to PCS in 2002

| NPDES ID  | Facility Name                  | Minimum Average Concentration <sup>a</sup> (mg/L) | Maximum Average Concentration <sup>a</sup> (mg/L) | Median Average Concentration <sup>a</sup> (mg/L) | Date Range      |
|-----------|--------------------------------|---|---|--|-----------------|
| NC0004308 | ALCOA Badin Works              | 0.003   | 258.4   | 0.152  | 8/2004 – 2/2006 |
| WV0000779 | Century Aluminum               | 0.010   | 1.06  | 0.150  | 1/2002 – 9/2002 |
| NY0000132 | ALCOA Massena East             | 0.012   | 6.19  | 0.025  | 1/2002 – 3/2006 |
| TN0065081 | ALCOA South Plant <sup>b</sup> | 0.005   | 0.033   | 0.011  | 3/2002 – 4/2005 |
| WA0000299 | Evergreen Aluminum             | 0.010   | 0.010   | 0.010  | 4/2003 – 1/2006 |
| MD0002429 | Eastalco Aluminum <sup>c</sup> | 0.001   | 0.020   | 0.003  | 1/2002 – 2/2006 |
| WA0002950 | Intalco Works <sup>c</sup>     | 0.001   | 0.002   | 0.002  | 2/2002 – 4/2002 |
| OH0011550 | Ormet Hannibal <sup>d</sup>    | 0.001   | 0.027   | 0.001  | 1/2002 – 3/2006 |

Source: Envirofacts.

<sup>a</sup>Concentrations are total cyanide, unless otherwise specified. EPA determined discharges reported as “0” and with “<” signs in Envirofacts were nondetects and excluded them from the facility’s concentrations. EPA included cyanide concentrations from all reported outfalls in this analysis.

<sup>b</sup>Concentrations are maximum. Facilities did not report average concentrations.

<sup>c</sup>Concentrations are cyanide, free (amenable to chlorination).

<sup>d</sup>Concentrations are cyanide, weak acid dissociable.

## 10.6 NFMM Category Conclusions

- The NFMM Category ranks high in TWPE because of the number of facilities with discharges.
- Some facilities discharges were misrepresented in PCS.
- Facilities in the Primary Aluminum Subcategory consistently report discharges of regulated pollutants, including fluoride and cyanide. EPA obtained additional data that shows current facility discharge concentrations are below treatment effectiveness concentrations identified as BAT in 1984.
- Pasminco Zinc Inc. reported discharges accounting for almost 19 percent of the NFMM Category's 2002 PCS TWPE. The majority of the facility's discharges are cadmium discharged from stormwater outfalls that exceed Tennessee's target stormwater cadmium concentration of 0.0159 mg/L (TDEC, 2005).
- Two of the top discharging facilities, ALCOA Warrick and Horsehead Corporation, reported discharges of chlorine accounting for approximately 21 percent of the NFMM Category's 2002 PCS TWPE. The chlorine discharges are associated with the on-site power generation at the facilities that are permitted with limits from 40 CFR Part 423: Steam Electric Power Generating Point Source Category. EPA determined the discharges of chlorine from the NFMM facilities are not applicable to 40 CFR Part 423 since 40 CFR Part 423 does not apply to integrated power generating plants. However, the chlorine loads are not from NFMM operations and were excluded from further review.
- EPA is not identifying the NFMM Category as a hazard priority based on data available at this time.

## 10.7 NFMM Category References

ADEQ. 2005a. Arkansas Department of Environmental Quality. Authorization to Discharge Under the National Pollutant Discharge Elimination System and the Arkansas Water and Air Pollution Control Act NPDES AR0000582 – ALCOA Bauxite Works, Bauxite, AR. Little Rock, AR. (May 31). DCN 03313.

ADEQ. 2005b. Arkansas Department of Environmental Quality. Authorization to Discharge Under the National Pollutant Discharge Elimination System and the Arkansas Water and Air Pollution Control Act Fact Sheet for NPDES AR0000582 – ALCOA Bauxite Works, Bauxite, AR. Little Rock, AR. (May 23). DCN 03313.

Alcan Inc. 2006. “Find Alcan Around the World – Seabee.” *About Alcan*. Available online at: <http://www.alcan.com/web/publishing.nsf/content/FF0C85E1F0D760B185256E860051BC1F?OpenDocument>. Date accessed: September 28, 2006. DCN 03728.

ALCOA. 2003. *ALCOA Begins Troutdale Site Restoration*. (July 16). Available online at: [http://www.alcoa.com/global/en/news/news\\_details.asp?pageID=231974841&newsYear=2003](http://www.alcoa.com/global/en/news/news_details.asp?pageID=231974841&newsYear=2003). Date accessed: July 5, 2006. DCN 03733.

ALCOA. 2006a. *ALCOA Badin Works*. Available online at: [http://www.alcoa.com/locations/alcoa\\_location/en/home.asp?code=406](http://www.alcoa.com/locations/alcoa_location/en/home.asp?code=406). Date accessed: September 28, 2006. DCN 03729.

ALCOA. 2006b. *ALCOA Takes Full Ownership of Intalco and Eastalco Smelters in Washington and Maryland; Signs Agreement for NW Power*. (June 29). Available online at: [http://www.alcoa.com/global/en/news/news\\_details.asp?pageID=20060629005669en&newsYear=2006](http://www.alcoa.com/global/en/news/news_details.asp?pageID=20060629005669en&newsYear=2006). Date accessed: July 5, 2006. DCN 03730.

ALCOA. 2006c. “ALCOA Tennessee Operations.” Available Online at: [http://www.alcoa.com/tn\\_operations/en/home.asp](http://www.alcoa.com/tn_operations/en/home.asp). Date accessed: July 5, 2006. DCN 03731.

ALCOA. 2006d. “ALCOA Warrick Operations – Evansville.” Available online at: [http://www.alcoa.com/locations/usa\\_warrick/en/home.asp](http://www.alcoa.com/locations/usa_warrick/en/home.asp). Date accessed: July 5, 2006. DCN 03732.

Doe Run Co. 2004a. The Doe Run Company. “Glover, MO.” *Smelting and Refining*. Available online at: <http://www.doerun.com/whatwedo/glover.asp>. Date accessed: April 12, 2006. DCN 03734.

Doe Run Co. 2004b. The Doe Run Company. “Boss, MO.” *Recycling*. Available online at: <http://www.doerun.com/whatwedo/boss.asp>. Date accessed: April 14, 2006. DCN 03735.

Forgey, Pat. 2004. “Smelter’s Final Hope Melts.” *The Daily News*. Longview, Washington. (January 20). Available online at: [http://www.tdn.com/articles/2004/01/20/area\\_news/news01.txt](http://www.tdn.com/articles/2004/01/20/area_news/news01.txt). Date accessed: July 5, 2006. DCN 03736.

Glencore. 2006. Glencore International AG. “Aluminum, Alumina, and Bauxite.” *Commodity Departments*. Available online at: <http://www.glencore.com/pages/aluminum.htm>. Date accessed: July 17, 2006. DCN 03737.

IDEM. 2001. Indiana Department of Environmental Management. Fact Sheet for NPDES Permit IN0001210 – ALCOA Lafayette Works, Lafayette, IN. Indianapolis, IN. (August). DCN 02400.

IDEM. 2002. Indiana Department of Environmental Management. NPDES Permit IN0001210 – ALCOA Lafayette Works, Lafayette, IN. Indianapolis, IN. (October 10). DCN 03314.

IDEM. 2004. State of Indiana Department of Environmental Management. Authorization to Discharge under the National Pollutant Discharge Elimination System Permit NPDES IN0001155 – ALCOA Warrick, Newburgh, IN. Indianapolis, IN. (August 3). DCN 03314.

Janjic, Vojin. Unknown. Tennessee Department of Environment and Conservation, Division of Water Pollution Control. *Permit Rationale for the Tennessee Storm Water Multi-Sector General Permit for Industrial Activities*. DCN 03752.

KDEP. 2002. Commonwealth of Kentucky Department for Environmental Protection. Kentucky Pollution Discharge Elimination System Permit and Fact Sheet for NPDES KY0002666 – Commonwealth Aluminum, Lewisport, KY. Frankfort, KY. (July 19). DCN 02405.

LDEQ. 2002. State of Louisiana Department of Environmental Quality. Offices of Environmental Services Water Discharge Permit NPDES LA0110931 – CS Metals of Louisiana Inc., Convent, LA. Baton Rouge, LA. (December 9). DCN 02407.

MDNR. 2003a. State of Missouri Department of Natural Resources. State Operating Permit Fact Sheet NPDES MO0000337 – Doe Run Resources Recycling, Boss, MO. Jefferson City, MO. DCN 03315.

MDNR. 2003b. State of Missouri Department of Natural Resources. State Operating Permit NPDES MO0000337 – Doe Run Resources Recycling, Boss, MO. Jefferson City, MO. (November 14). DCN 03315.

MDNR. 2005. State of Missouri Department of Natural Resources. State Operating Permit NPDES MO0001121 – Doe Run, Glover Smelter, Glover, MO. Jefferson City, MO. (August 26). DCN 03317.

MDNR. 2004. State of Missouri Department of Natural Resources. State Operating Permit NPDES MO0105732 – Noranda Aluminum Inc., New Madrid, MO. Jefferson City, MO. (January 9). DCN 02505.

NYSDEC. 2001. New York State Department of Environmental Conservation. State Pollutant Discharge Elimination System Fact Sheet NPDES NY0001732 – ALCOA Massena West, Massena, NY. Watertown, NY. (July 16). DCN 02494.

NYSDEC. 2003. New York State Department of Environmental Conservation. State Pollutant Discharge Elimination System Discharge Permit NPDES NY0001732 – ALCOA Massena West, Massena, NY. Watertown, NY. (June 9). DCN 02494.

ODEQ. 2005. Oregon Department of Environmental Quality. National Pollutant Discharge Elimination System Waste Discharge Permit NPDES OR0001708 – Noranda Aluminum Specialties, The Dalles, OR. Bend, OR. (February 8). DCN 02762.

Olin. 2000. Olin Corporation. “Olin Brass.” *Business Lines*. (April 28). Available online at: <http://www.olin.com/business/brass.asp>. Date accessed: July 5, 2006. DCN 03753.

PDEP. 2001a. Commonwealth of Pennsylvania Department of Environmental Protection Water Management Program. Authorization to Discharge under the National Pollutant Discharge Elimination System Permit NPDES PA0002208 – Horsehead Corporation, Monaca, PA. Harrisburg, PA. (August 2). DCN 02409.

PDEP. 2001b. Commonwealth of Pennsylvania Department of Environmental Protection Water Management Program. Authorization to Discharge under the National Pollutant Discharge Elimination System Permit NPDES PA0012751 – Zinc Corporation of America, Palmerton, PA. Harrisburg, PA. (December 18). DCN 02893.

Plunkert, Patricia A. 2006. U.S. Geological Survey. “Aluminum Mineral Commodity Summaries.” *U.S. Geological Survey*. (January). DCN 03755.

Port of Tacoma. 2000. *Port Prepares to Demolish Kaiser Smokestack: When Will the Kaiser Smokestack Demolition Blast Happen?* Available online at: <http://www.portoftacoma.com/topstory.cfm?sub=69&lsub=847>. DCN 03756.

Reddington, Mike. 2005. Olin Corporation. Telephone conversation with Mike Reddington of Olin Corporation and Jessica Wolford of Eastern Research Group, Inc. “Olin Corp. Main Plant Facility Phosphorous Releases in TRI 2003 (62024-LNCRP-SHAMR).” (December 20). DCN 02545.

TDEC. 2005. State of Tennessee Department of Environment and Conservation. State of Tennessee National Pollutant Discharge Elimination System Permit NPDES TN0029157 – Pasmenco Zinc Inc., Clarksville, TN. Nashville, TN. (May 31). DCN 02403.

TDEC. 2004a. State of Tennessee Department of Environment and Conservation. State of Tennessee National Pollutant Discharge Elimination System Addendum to Rationale NPDES TN0065081 – ALCOA South Plant, Alcoa, TN. Nashville, TN. (January 7). DCN 03319.

TDEC. 2004b. State of Tennessee Department of Environment and Conservation. State of Tennessee National Pollutant Discharge Elimination System Permit NPDES TN0065081 – ALCOA South Plant, Alcoa, TN. Nashville, TN. (March 31). DCN 03319.

TNRCC. 1996. Texas Natural Resource Conservation Commission. Permit to Dispose of Wastes for NPDES TX0004715 – ALCOA Point Comfort, Point Comfort, TX. Austin, TX. (August 30). DCN 02422.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

U.S. EPA. 1989. *Development Document for Effluent Limitations Guidelines and Standards for the Nonferrous Metals Manufacturing Point Source Category*. Vol II. U.S. EPA. EPA-440-1-89-019.2. Washington, DC. (May).

UDEQ. Unknown. Utah Department of Environmental Quality. Statement of Basis for UT0000051 – Kennecott Utah Copper Corporation. Salt Lake City, UT. DCN 03320.

USEC. 2005. United States Enrichment Corporation Inc. “Portsmouth Gaseous Diffusion Plant.” *USEC Facilities*. Available online at: [http://www.usec.com/v2001\\_02/HTML/Facilities\\_PortsOverview.asp](http://www.usec.com/v2001_02/HTML/Facilities_PortsOverview.asp). Date accessed: July 3, 2006. DCN 03758.

USGS. 2005. U.S. Geological Survey. “Vanadium in January 2005.” *Mineral Industry Surveys*. (April). Available online at: <http://minerals.usgs.gov/minerals>. DCN 03754.

WDE. 1997. State of Washington Department of Ecology. National Pollutant Discharge Elimination System Waste Discharge Permit NPDES WA0000680 – ALCOA Wenatchee Works, Malaga, WA. Olympia, WA. (September 2). DCN 02738.

WDE. 2000. State of Washington Department of Ecology. National Pollutant Discharge Elimination System Waste Discharge Permit NPDES WA0000876 – CVB Northwest, Mead, WA. Olympia, WA. (January 1). DCN 02739.

WDE. 2001a. State of Washington Department of Ecology. National Pollutant Discharge Elimination System Waste Discharge Permit NPDES WA0000931 – Port of Washington, Tacoma, WA. Olympia, WA. (October 10). DCN 02740.

WDE. 2001b. State of Washington Department of Ecology. Fact Sheet for NPDES Permit WA0000680 – ALCOA Wenatchee Works, Malaga, WA. Olympia, WA. (November 1). DCN 02738.

WDE. 2001c. State of Washington Department of Ecology. National Pollutant Discharge Elimination System Waste Discharge Permit Fact Sheet NPDES WA0000931 – Port of Washington, Tacoma, WA. Olympia, WA. (November 29). DCN 02740.

WDE. 2002. State of Washington Department of Ecology. National Pollutant Discharge Elimination System Waste Discharge Permit NPDES/WA0000086-Longview Aluminum, Longview, WA. Olympia, WA. (February 1). DCN 02863.

WDE. Unknown. State of Washington Department of Ecology. Fact Sheet for NPDES WA0000876-CVB Northwest, Mead, WA. Olympia, WA. DCN 02739.

## **11.0 ORGANIC CHEMICALS, PLASTICS, AND SYNTHETIC FIBERS (40 CFR PART 414)**

EPA selected the Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) Category for additional data collection and analysis because it ranked high in terms of toxic and nonconventional discharges during EPA's 2005 annual review (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 2004). This section summarizes the 2005 annual review and also describes the 2006 annual review. EPA's 2006 annual review builds on the 2005 annual review.

EPA is currently reviewing discharges from the Chlorinated Hydrocarbon Manufacturing Segment of the OCPSF Category as part of the Chlorine and Chlorinated Hydrocarbons (CCH) effluent guidelines rulemaking. Because a rulemaking for this segment of the OCPSF category is underway, EPA excluded discharges from these facilities from further consideration in this review (see Table V-1, 70 FR 51050, August 29, 2005).

### **11.1 OCPSF Category Background**

This section provides background on the OCPSF Category including a brief profile of the OCPSF industry, background on 40 CFR Part 414, and a summary of findings from the OCPSF Category detailed study as part of the 2004 Plan.

#### **11.1.1 OCPSF Industry Profile**

The OCPSF Category includes many chemical industries producing a wide variety of end products, such as polypropylene, vinyl chloride and polyvinyl chloride (PVC), chlorinated solvents, rubber precursors, styrofoam additives, and polyester. Some OCPSF facilities are extremely complex and produce hundreds of chemicals, while others are simpler, producing one or two end products. Facilities in the following five SIC codes could perform operations covered by the OCPSF ELGs:

- 2821: Plastic Materials, Synthetic Resins, and Nonvulcanizable Elastomers;
- 2823: Cellulosic and Other Man-Made Fibers;
- 2824: Synthetic Organic Fibers, Except Cellulose;
- 2865: Cyclic Crudes and Intermediates, and Organic Dyes and Pigments; and
- 2869: Industrial Organic Chemicals, Not Elsewhere Classified (NEC).

In addition, EPA is considering including operations from five other SIC codes as potential new subcategories of the OCPSF Category. See Section 11.3 for the discussion of the potential new subcategories.

Table 11-1 lists the five SIC codes with operations in the OCPSF Category and the five SIC codes included as potential new subcategories to the OCPSF Category.

OCPSF facilities discharge directly to surface water as well as to POTWs. Table 11-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds.

### **11.1.2 40 CFR Part 414**

EPA first promulgated ELGs for the OCPSF Category (40 CFR Part 414) on November 5, 1987 (52 FR 42568). This category consists of eight subcategories that apply to the manufacture of products and product groups, as shown in Table 11-3 with the corresponding SIC codes and applicability. Subparts B through H have limitations for BOD<sub>5</sub>, TSS, and pH. The regulation also includes limitations and/or pretreatment standards for certain toxic pollutants in three additional subparts:

- Subpart I - Direct Discharge Point Sources that use End-of-Pipe Biological Treatment;
- Subpart J - Direct Discharge Point Sources that do not use End-of-Pipe Biological Treatment; and
- Subpart K - Indirect Discharge Point Sources.

### **11.1.3 Previous Detailed Study Findings for the OCPSF Category**

Previously, EPA conducted a detailed study of the OCPSF Category in support of the 2004 Plan (see Section 6.0 of the 2004 Plan (U.S. EPA, 2004)). EPA selected the OCPSF Category for study based on high TWPE from both TRI- and PCS- reported discharges. This subsection summarizes the findings from the 2004 detailed study.

**Table 11-1. Number of Facilities in OCPSF SIC Codes**

| SIC Code  | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 2821: Plastic Materials, Synthetic Resins, and Nonvulcanizable Elastomers | 688                       | 137                   | 403                   | 385                   |
| 2823: Cellulosic and Other Man-Made Fibers                                | 8                         | 4                     | 5                     | 5                     |
| 2824: Synthetic Organic Fibers, Except Cellulosic                         | 94                        | 9                     | 40                    | 42                    |
| 2865: Cyclic Crudes and Intermediates, and Organic Dyes and Pigments      | 217                       | 33                    | 106                   | 95                    |
| 2869: Industrial Organic Chemicals, NEC                                   | 3,215                     | 189                   | 469                   | 460                   |
| <b>OCPSF Category Total<sup>c</sup></b>                                   | <b>4,222</b>              | <b>372</b>            | <b>1,023</b>          | <b>987</b>            |
| <b>Potential New Subcategories</b>  |                           |                       |                       |                       |
| 2842: Specialty Cleaning, Polishing, and Sanitation Preparations          | 604                       | 3                     | 138                   | 135                   |
| 2844: Perfumes, Cosmetics, and Other Toilet Preparations                  | 1,586                     | 10                    | 43                    | 39                    |
| 2891: Adhesives and Sealants  | 585                       | 14                    | 185                   | 185                   |
| 2899: Chemicals and Chemical Preparations, NEC                            | 3,582                     | 45                    | 339                   | 330                   |
| 5169: Chemicals and Allied Products                                       | 54,314                    | 20                    | 464                   | 433                   |
| <b>Potential New Subcategories Total</b>                                  | <b>60,671</b>             | <b>92</b>             | <b>1,169</b>          | <b>1,122</b>          |

Source: U.S. Economic Census 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>Excludes the potential new subcategories.

NEC – Not elsewhere classified.

**Table 11-2. OCPSF Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code  | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 2821: Plastic Materials, Synthetic Resins, and Nonvulcanizable Elastomers | 64                              | 101                               | 19   | 219                          |
| 2823: Cellulosic and Other Man-Made Fibers                                | 2                               | 0                                 | 1  | 2                            |
| 2824: Synthetic Organic Fibers, Except Cellulosic                         | 9                               | 11                                | 2  | 18                           |
| 2865: Cyclic Crudes and Intermediates, and Organic Dyes and Pigments      | 29                              | 38                                | 5  | 33                           |
| 2869: Industrial Organic Chemicals, NEC                                   | 107                             | 134                               | 27   | 198                          |
| <b>Potential New Subcategories</b>  |                                 |                                   |  |                              |
| 2842: Specialty Cleaning, Polishing, and Sanitation Preparations          | 1                               | 39                                | 0  | 98                           |
| 2844: Perfumes, Cosmetics, and Other Toilet Preparations                  | 0                               | 21                                | 0  | 22                           |
| 2891: Adhesives and Sealants  | 3                               | 26                                | 1  | 155                          |
| 2899: Chemicals and Chemical Preparations, NEC                            | 17                              | 79                                | 10   | 233                          |
| 5169: Chemicals and Allied Products                                       | 6                               | 40                                | 0  | 418                          |

Source: *TRIRelases2002\_v4*.

NEC – Not elsewhere classified.

**Table 11-3. Applicability of Subcategories in the OCPSF Category**

| Subpart | Subpart Name                | Applicable SIC Code(s)  | Subpart Applicability   |
|---------|-----------------------------|---|---|
| B       | Rayon Fibers                | 2823: Cellulosic Manmade Fibers   | Cellulosic manmade fiber (Rayon) manufactured by the Viscose process.   |
| C       | Other Fibers                | 2823: Cellulosic Manmade Fibers<br>2824: Synthetic Organic Fibers, Except Cellulosic                        | All other synthetic fibers (except Rayon) including, but not limited to, products listed in Section 414.30.   |
| D       | Thermoplastic Resins        | 28213: Thermoplastic Resins   | Any plastic product classified as a Thermoplastic Resin including, but not limited to, products listed in Section 414.40.   |
| E       | Thermosetting Resins        | 28214: Thermosetting Resins   | Any plastic product classified as a Thermosetting Resin including, but not limited to, products listed in Section 414.50.   |
| F       | Commodity Organic Chemicals | 2865: Cyclic Crudes and Intermediates, Dyes and Organic Pigments<br>2869: Industrial Organic Chemicals, NEC | Commodity organic chemicals and commodity organic chemical groups including, but not limited to, products listed in Section 414.60.   |
| G       | Bulk Organic Chemicals      | 2865: Cyclic Crudes and Intermediates, Dyes and Organic Pigments<br>2869: Industrial Organic Chemicals, NEC | Bulk organic chemicals and bulk organic chemical groups including, but not limited to, products listed in Section 414.70.   |
| H       | Specialty Organic Chemicals | 2865: Cyclic Crudes and Intermediates, Dyes and Organic Pigments<br>2869: Industrial Organic Chemicals, NEC | All other organic chemicals and organic chemical groups including, but not limited to, products listed in the OCPSF Development Document (Vol. II, Appendix II-A, Table VII). |

Source: *Product and Product Group Discharges Subject to Effluent Limitations and Standards for the Organic Chemicals, Plastics, and Synthetic Fibers Point Source Category - 40 CFR 414, Table 2-2 (U.S. EPA, 2005c).*  
NEC - Not elsewhere classified.

EPA identified dioxin and dioxin-like compounds as the primary pollutants responsible for the OCPSF industry's large toxic-weighted pollutant discharge. EPA concluded that the manufacture of ethylene dichloride, vinyl chloride monomer, and polyvinyl chloride, referred to collectively as the vinyl chloride manufacturing segment of the OCPSF industry, is the primary source of dioxin and dioxin-like compounds discharges. EPA found that the largest discharges of dioxin and dioxin-like compounds occur at large integrated facilities that also operated chlor-alkali plants. In addition, EPA found that discharges of dioxin and dioxin-like compounds from stand-alone chlor-alkali plants are significant. As a result, EPA identified vinyl chloride manufacturing, which is subject to the OCSPF ELGs (Part 414) and chlor-alkali manufacturing, which is subject to the Inorganic Chemicals Manufacturing ELGs (Part 415), for possible effluent guidelines revisions. In 2005, EPA's Vinyl Chloride and Chlor-Alkali rulemaking effort identified other manufacturing processes that operate under similar conditions to the chlor-alkali and vinyl chloride processes, and therefore have potential to discharge dioxin and dioxin-like compounds. EPA decided to expand the manufacturing operations considered for revised ELGs to include all chlorine manufacturing processes and manufacturing processes for chlorinated hydrocarbons manufactured by direct chlorination, oxychlorination, dehydrochlorination, or hydrochlorination. Chlorinated hydrocarbons that are regulated under the Pesticide Chemicals Category (40 CFR Part 455) or under the Pharmaceuticals Manufacturing Category (40 CFR 439) are not included in the CCH manufacturing segment.

EPA reviewed two additional sectors of the OCPSF Category for the 2004 detailed study: aniline and dye manufacturers and coal tar refiners. Aniline and dye manufacturers contributed the majority of aniline discharges reported to TRI for 2000. EPA learned that most of these facilities discharge their wastewater to POTWs. Aniline is highly treatable in biological systems and receiving POTWs indicated no interference issues with these discharges. The coal tar refiners contributed the majority of PACs discharges reported to TRI for 2000. EPA learned that the coal tar industry was declining, and that the PACs discharges were at concentrations near or at treatability levels. As a result, EPA determined that, based on the information available at that time, it was not appropriate to select the aniline and dye manufacturing and coal tar refining sectors of the OCPSF Category for possible effluent guidelines revision.

## **11.2 OCPSF Category 2005 Annual Review**

This subsection discusses EPA's 2005 annual review of the OCPSF Category including the screening-level review and category-specific review.

### **11.2.1 OCPSF Category 2005 Screening-Level Review**

Table 11-4 presents the OCPSF Category and the vinyl chloride manufacturing sector TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*. The discharges for the OCPSF Category in Table 11-4 include loads from facilities in SIC codes EPA determined are potential new subcategories.

**Table 11-4. OCPSF Category 2005 Screening-Level Review Results**

| Rank            | Point Source Category              | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | Total TWPE |
|-----------------|------------------------------------|----------------------------|----------------------------|------------|
| 3               | OCPSF                              | 1,711,005                  | 627,857                    | 2,338,862  |
| NA <sup>c</sup> | Vinyl Chlorine Sector <sup>d</sup> | 15,083                     | 2,796,270                  | 2,811,353  |

Source: 2005 Annual Screening-Level Analysis (U.S. EPA, 2005); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>The rankings presented in Tables 4-12, 4-13, and 4-14 represent the combined TWPE for the Vinyl Chloride and Chlor-Alkali sectors. The Vinyl Chloride sector was not ranked independently.

<sup>d</sup>The vinyl chloride sector of the OCPSF Category was reviewed for the 2005 screening-level review and includes facilities that manufacture ethylene dichloride, vinyl chloride monomer, and/or polyvinyl chloride and reported a primary SIC code associated with OCPSF (see Table 11-1). This sector includes some facilities that also perform chlor-alkali manufacturing operations. Note that EPA expanded the scope of the vinyl chloride manufacturing segment to include manufacture of chlorinated hydrocarbons for the 2006 review.

### 11.2.2 OCPSF Category 2005 Pollutants of Concern

Table 11-5 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. Discharges of hexachlorobenzene in PCS for 2002 accounted for 64 percent of the OCPSF Category 2002 PCS TWPE. Discharges of sodium nitrite and dioxin and dioxin-like compounds in TRI for 2002 accounted for 64 percent of the OCPSF Category 2002 TRI TWPE.

**Table 11-5. 2005 Annual Review Results: OCPSF Category Pollutants of Concern**

| Pollutant                        | 2002 PCS <sup>a</sup>  |                       |                  | 2002 TRI <sup>b</sup>  |                       |                |
|----------------------------------|--|-----------------------|------------------|--|-----------------------|----------------|
|                                  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE             | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           |
| Hexachlorobenzene (HCB)          | 16   | 560                   | 1,090,485        | 4  | 30                    | 59,272         |
| Dioxin and Dioxin-like Compounds | 1  | 0.00025               | 178,624          | 9  | 0.022                 | 152,200        |
| Chlorine                         | 60   | 171,029               | 87,082           | 25   | 58,937                | 30,009         |
| Lead                             | 40   | 29,313                | 65,661           | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                |
| Nitrogen, Nitrite Total (as N)   | 4  | 115,292               | 43,042           |  |                       |                |
| Sodium Nitrite                   | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                  | 43   | 670,855               | 250,452        |
| Dinitrotoluene                   |  |                       |                  | 2  | 39,985                | 25,661         |
| <b>OCPSF Category Total</b>      | <b>239<sup>c</sup></b>   | <b>1,053,253,290</b>  | <b>1,711,005</b> | <b>792<sup>c</sup></b>   | <b>54,528,174</b>     | <b>627,857</b> |

Source: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

### 11.3 Potential New Subcategories for the OCPSF Category

As part of the 2005 annual review, EPA reviewed industries with SIC codes not clearly subject to existing ELGs. EPA concluded the processes, operations, wastewaters, and pollutants of facilities in the SIC codes listed in Table 11-6 are similar to those of the OCPSF Category. Table 11-6 shows the combined TWPE from *TRIRelases2002\_v2* and *PCSLoads2002\_v2* for each SIC code that is a potential new subcategory. The discharges for the potential new subcategory SIC codes are a negligible percentage of the total 2002 TWPE for the OCPSF Category.

**Table 11-6. Pollutant TWPE for Potential New Subcategories in OCPSF Category**

| SIC Code | SIC Description  | Total 2002 TWPE | Percentage of Total OCPSF Category TWPE |
|----------|--|-----------------|---|
| 2842     | Specialty Cleaning, Polishing, and Sanitation Preparations | 1,048           | 0.04                                    |
| 2844     | Perfumes, Cosmetics, and Other Toilet Preparations         | 6,909           | 0.30                                    |
| 2891     | Adhesives and Sealants                                     | 199             | 0.008                                   |
| 2899     | Chemicals and Chemical Preparations, NEC                   | 59,070          | 2.53                                    |
| 5169     | Chemicals and Allied Products                              | 587             | 0.03                                    |

Source: *TRIRelases2002\_v2*; *PCSLoads2002\_v2*.

NEC – Not elsewhere classified.

### 11.4 OCPSF Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the OCPSF Category. EPA obtained additional data and identified:

- Pollutant loads reported under wrong parameter code;
- Errors in how PCS loads were estimated for two facilities;
- Changes in estimates of TWPE for dioxin for one facility; and
- Changes in estimates of TWPE for sodium nitrite.

#### 11.4.1 OCPSF Category Facility Discharge Revisions

EPA received comments on the Preliminary 2006 Plan from the American Chemistry Council (ACC) stating that chlorine was measured upstream of the final outfall prior to commingling with other treated wastewater for two facilities, Equistar Chemicals LP in Channelview, TX and Solutia Inc./Equistar Chemicals LP in Alvin, TX (ACC, 2005). EPA set the discharges of chlorine from the Equistar Chemicals LP facility in Channelview, TX to zero in the revised 2002 PCS database, *PCSLoads2002\_v4*, after verifying that chlorine was not measured at the final outfall. EPA was unable to verify the chlorine monitoring location for the Solutia Inc./Equistar Chemicals LP facility in Alvin, TX and therefore did not change the chlorine loads in *PCSLoads2002\_v4*.

EPA also received comments on the Preliminary 2006 Plan from the ACC stating that one facility, Cytec Industries in Belmont, WV, reporting discharges of lead does not monitor lead and most likely misreported their manganese discharges using the parameter code for lead (ACC, 2005). EPA reviewed the permit limits for this facility to verify that it does not have monitoring requirements for lead and revised the reported discharge in *PCSLoads2002\_v4* to represent pounds of manganese, not pounds of lead. The correction reduced the OCPSF Category's discharges of lead by 55,642 TWPE and increased the OCPSF Category's discharges of manganese by 1,750 TWPE.

EPA reviewed the discharges of chlorinated dibenzo(p) dioxin reported by one facility, Dover Chemical in Dover, OH, in the PCS 2002 database. For the Preliminary 2006 Plan, EPA used the TWF for the most toxic dioxin congener, 2,3,7,8-tetrachlorodibenzo(p)dioxin, to estimate the TWPE for Dover Chemical (U.S. EPA, 2005b). ACC submitted a comment to EPA stating that the parameter that Dover Chemical includes in its discharge monitoring reports (chlorinated dibenzo-p-dioxin effluent) represents the total mass for all 17 dioxin and dioxin-like congeners. Therefore, it is appropriate for EPA to apply the median TWF for the dioxin and dioxin-like congeners to estimate the TWPE for this discharge (ACC, 2005). In response to ACC's comment, EPA applied the median TWF for the 17 dioxin and furan congeners to recalculate the TWPE for Dover Chemical in the revised 2002 PCS database, *PCSLoads2002\_v4*. As a result, the TWPE for Dover Chemical's dioxin discharge decreased from 178,624 TWPE to 2,690 TWPE.

EPA received comments from ACC about the hexachlorobenzene (HCB) discharges for Honeywell Nylon LLC in Hopewell, VA. ACC stated that the concentrations of HCB on the facility's 2002 discharge monitoring reports were also reported at the detection limit. This implies that the facility did not measure HCB at concentrations above the detection limit. According to EPA's methodology for calculating annual loads using PCS data (see Section 4.2.1.1), if HCB was not detected in any of facility's 2002 discharge monitoring reports, then the annual load for HCB should equal zero. In the revised PCS 2002 database, *PCSLoads2002\_v4*, EPA set the facility loads for HCB to zero.

#### **11.4.2 OCPSF Category TWF and POTW Percent Removal Revisions**

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF and POTW removal values used for sodium nitrite and dinitrotoluene, the POTW percent removal used for chlorine, and the TWF used for nitrite to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373), and the POTW percent removal is now 90 percent (formerly 1.85 percent). The TWF that EAD applies for dinitrotoluene is now 0.043077 (formerly 0.64176) and the POTW percent removal is now 62.005 percent (formerly 47.12 percent). The POTW percent removal for chlorine is now 100 percent (formerly 1.87 percent). The TWF for nitrite is now 0.0032 (formerly 0.373). Table 11-7 presents the loads before and after corrections to the TWFs and POTW percent removals for the OCPSF Category.

**Table 11-7. Impact of Changes to TWF and POTW Percent Removal for the OCPSF Category**

| Database | Pollutant                      | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|--------------------------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite                 | 43  | 250,452               | 292                   |
| TRI 2002 | Dinitrotoluene                 | 2   | 25,661                | 1,238                 |
| TRI 2002 | Chlorine                       | 25  | 30,009                | 28,999                |
| PCS 2002 | Nitrogen, Nitrite Total (as N) | 4   | 43,042                | 369                   |

Source: *TRIRelases2002\_v2*; *TRIRelases2002\_v4*; *PCSLoads2002\_v2*; *PCSLoads2002\_v2*.

### 11.4.3 OCPSF Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings based on methodology changes as described in Section 4.2 and changes made based on permit review. For the OCPSF Category, the most significant changes are also described in Sections 11.4.1 and 11.4.2. Table 11-8 shows the 2006 screening-level TWPE estimated for the OCPSF Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 11-8. OCPSF Category 2006 Screening-Level Review Results**

| Point Source Category       | PCS 2002 <sup>a</sup> | TRI 2002 <sup>b</sup> | TRI 2003 <sup>b</sup> |
|-----------------------------|-----------------------|-----------------------|-----------------------|
| OCPSF Category <sup>c</sup> | 397,951               | 349,429               | 1,021,401             |

Sources: *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Values exclude TWPE from facilities included in the chlorinated hydrocarbon manufacturing segment, because EPA is investigating these facilities as part of the CCH rulemaking.

### 11.4.4 OCPSF Category 2006 Pollutants of Concern

Table 11-9 presents the pollutants of concern for the OCPSF Category based on the 2006 annual review.

HCB is a top pollutant in all three databases. Dioxin and dioxin-like compounds is a top pollutant in the TRI databases with an increase in discharges from 2002 to 2003. In addition, TWPE estimates for TRI-reported releases of PACs show a large increase from 2002 to 2003 (4,613 TWPE and 67,964 TWPE, respectively). EPA reviewed discharges from facilities reporting these three pollutants. Section 11.5 discusses EPA's review of facilities that discharge HCB, Section 11.6 discusses EPA's review of facilities that discharge dioxin and dioxin-like compounds, and Section 11.7 discusses EPA's review of facilities that discharge PACs.

Table 11-9. 2006 Annual Review: OCPSF Category Pollutants of Concern

| SIC Code                         | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |                | 2003 TRI <sup>b</sup>  |                       |                  |
|----------------------------------|--|-----------------------|----------------|--|-----------------------|----------------|--|-----------------------|------------------|
|                                  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE             |
| Hexachlorobenzene (HCB)          | 13   | 53                    | 103,420        | 4  | 30                    | 59,272         | 4  | 32                    | 61,656           |
| Chlorine                         | 58   | 106,278               | 54,113         | 25   | 56,954                | 28,999         | 22   | 55,810                | 28,416           |
| Fluoride                         | 14   | 910,270               | 31,859         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |                  |
| Benzo(a)pyrene                   | 16   | 288                   | 28,990         |  |                       |                |  |                       |                  |
| Copper                           | 100  | 33,629                | 21,348         |  |                       |                |  |                       |                  |
| Dioxin and Dioxin-like Compounds | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 8  | 0.019                 | 115,132        | 6  | 0.440                 | 703,572          |
| Nitrate Compounds                |  |                       |                | 131  | 44,533,702            | 33,252         | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |                  |
| Hydroquinone                     |  |                       |                |  | 13,513                | 17,217         |  |                       |                  |
| PACs                             |  |                       |                | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | 10   | 675                   | 67,964           |
| PCBs                             |  |                       |                |  |                       |                | 2  | 0.812                 | 27,627           |
| <b>OCPSF Category Total</b>      | <b>232<sup>c</sup></b>   | <b>978,243,371</b>    | <b>397,951</b> | <b>791<sup>c</sup></b>   | <b>53,973,135</b>     | <b>349,429</b> | <b>762<sup>c</sup></b>   | <b>37,904,315</b>     | <b>1,021,401</b> |

Source: PCSLoads2002\_v4; TRIRelases2002\_v4; TRIRelases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

## 11.5 OCPSF Category HCB Discharges

EPA identified HCB as a pollutant of concern during the 2005 annual review. For the 2006 annual review, EPA reviewed HCB dischargers in TRI and PCS. The results of the 2006 annual review show that HCB continues to rank high in terms of TRI and PCS TWPE. The following subsections discuss EPA's review of OCPSF facilities that report HCB discharges to TRI and PCS.

### 11.5.1 OCPSF Category HCB Discharges in TRI

Table 11-10 shows the OCPSF facilities that reported discharges of HCB to wastewater to TRI for 2002 and 2003. One facility, DuPont Chambers Works in Deepwater, NJ, contributes 83 percent of the HCB TWPE for 2002 and 79 percent of the HCB TWPE for 2003. EPA is currently reviewing TRI-reported discharges of HCB from Du Pont Chambers Works to determine the basis of estimate. The Solutia Inc., Delaware River Plant in Bridgeport, NJ reported the second largest HCB discharge to TRI, contributing 16 percent of the total HCB TWPE for 2002 and 20 percent of the total HCB TWPE for 2003. EPA identified the Solutia Inc., Delaware River Plant, currently owned by Ferro Corporation, as a manufacturer of benzyl chloride (Olson, 2006). As a result, EPA plans to include this plant in its information collection under the CCH rulemaking effort (see Section 11.1.3) for the 2007 annual review. EPA plans to review discharges of several organic compounds, including HCB, during the rulemaking effort.

**Table 11-10. OCPSF Facilities Reporting HCB Releases to TRI**

| Facility Name                      | Location        | TRI 2002 <sup>a</sup>  |               | TRI 2003 <sup>a</sup>  |               |
|------------------------------------|-----------------|------------------------|---------------|------------------------|---------------|
|                                    |                 | Pounds of HCB Released | HCB TWPE      | Pounds of HCB Released | HCB TWPE      |
| Du Pont Chambers Works             | Deepwater, NJ   | 25.4                   | 49,472        | 25.0                   | 48,693        |
| Solutia Inc., Delaware River Plant | Bridgeport, NJ  | 5.00                   | 9,739         | 6.20                   | 12,076        |
| Sun Chemical Corp.                 | Cincinnati, OH  | 0.0157                 | 30.6          | 0.440                  | 856           |
| Clariant LSM (Florida) Inc.        | Gainesville, FL | 0.0157                 | 30.6          | 0.0157                 | 30.6          |
| <b>OCPSF Category Total</b>        |                 | <b>30.4</b>            | <b>59,272</b> | <b>31.7</b>            | <b>61,656</b> |

Source: *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

### 11.5.2 OCPSF Category HCB Discharges in PCS

Table 11-11 shows the OCPSF facilities for which PCS includes 2002 discharges of HCB. No one facility contributes more than 19 percent of the total HCB TWPE in the 2002 PCS database for the OCPSF Category. One facility, Du Pont Chamber Works, reports discharges of HCB to TRI but does not report discharges of HCB to PCS because the facility does not have a permit limit or monitoring requirements for HCB.

**Table 11-11. OCPSF Facilities Reporting Discharges of HCB to PCS in 2002**

| <b>NPDES ID</b>             | <b>Facility Name</b>                | <b>Facility Location</b> | <b>Average 2002 HCB Concentration (µg/L)</b> | <b>Pounds of HCB Discharged</b> | <b>HCB TWPE</b> |
|-----------------------------|-------------------------------------|--------------------------|--|---------------------------------|-----------------|
| WV0000868                   | Flexsys America LP                  | Nitro                    | 2.5  | 10.0                            | 19,537          |
| SC0003557                   | Honeywell Nylon LLC/Columbia        | Columbia                 | 5.00 <sup>a</sup>                            | 8.28                            | 16,127          |
| SC0002798                   | Invista S.A.R.L./Spartanburg        | Spartanburg              | 10.0   | 7.95                            | 15,493          |
| WV0002496                   | Ripplewood Phosphorus U.S. LLC      | Gallipolis Ferry         | 4.13 <sup>a</sup>                            | 7.20                            | 14,024          |
| LA0038890                   | Nalco Company                       | Garyville                | 4.75 <sup>a</sup>                            | 6.48                            | 12,621          |
| WV0001112                   | Sunoco, Inc. (R & M)                | Kenova                   | 10.0   | 5.40                            | 10,518          |
| DE0020001                   | Metachem Products, LLC <sup>b</sup> | Delaware City            | 3.18   | 3.25                            | 6,335           |
| WV0001279                   | E I Dupont De Nemours & Co          | Parkersburg              | 0.04   | 2.88                            | 5,609           |
| AL0002097                   | Honeywell International Inc         | Fairfield                | 4.01 <sup>a</sup>                            | 0.500                           | 982             |
| WV0004588                   | Koppers Industries Inc              | Follansbee               | 0.500  | 0.360                           | 701             |
| WV0004740                   | Crompton Corporation                | Morgantown               | 0.550  | 0.360                           | 701             |
| WV0005169                   | Bayer Materialscience, LLC          | New Martinsville         | 0.050  | 0.360                           | 701             |
| WV0022047                   | Crompton Corporation                | Morgantown               | 0.550  | 0.0360                          | 70.1            |
| <b>OCPSF Category Total</b> |                                     |                          |  | <b>53.1</b>                     | <b>103,420</b>  |

Source: *PCSLoads2002\_v4*.<sup>a</sup>Concentration was back-calculated using monthly mass and flow data.<sup>b</sup>Facility is no longer active.

EPA reviewed monthly DMR data in the PCS 2002 database and on EPA's Envirofacts web page for the facilities listed in Table 11-11. Based on this review, EPA suspects that HCB loads in PCS may be calculated from concentrations that are based on nondetects. According to EPA Method 1625, the method detection limit for HCB is 10 ug/L. Concentrations for HCB range from 0.04 to 10 and are all less than or equal to the method detection limit. As part of the 2007 annual review, EPA will review discharges of HCB from the top four facilities to determine if the facilities measured HCB at concentrations above the detection limit.

### **11.6 OCPSF Category Dioxin and Dioxin-Like Compounds Discharges**

EPA identified dioxin and dioxin-like compounds as a pollutant of concern during the 2005 annual review. For the 2006 annual review, EPA analyzed information about the single facility with "chlorinated dibenzo(p)dioxin effluent" data in PCS. EPA also reviewed information about facilities that reported discharges of dioxin and dioxin-like compounds to TRI to determine potential process sources and methods used to estimate reported discharges. The results of the 2006 annual review show that dioxin and dioxin-like compounds continue to rank high in terms of TRI TWPE. PCS dioxin TWPE, however, has decreased significantly from the 2005 annual review.

Table 11-12 shows the OCPSF facilities that reported discharges of dioxin and dioxin-like compounds to TRI in 2002 and 2003 and how the facilities estimated discharges of dioxin and dioxin-like compounds (based on contact with the facilities) (ERG, 2006). One facility, BP Solvay Polyethylene in Deer Park, TX contributes over 96 percent of the total dioxin and dioxin-like compound TRI 2003 TWPE for the OCPSF Category.

Dioxin discharges based on TCEQ sampling at three facilities contribute 99 percent of the dioxin and dioxin-like compounds TWPE for 2002. TCEQ conducted the sampling to support the total maximum daily load (TMDL) study for the Houston Ship Channel, which was placed on the Section 303(d) list after the Texas Department of Health issued a seafood consumption advisory for catfish and blue crabs in the upper portion of the Galveston Bay and Houston Ship Channel in September 1990. The purpose of the study is to develop a TMDL for dioxin in the Houston Ship Channel, including upper Galveston Bay, and to develop a plan for managing dioxin and dioxin-like compounds to correct existing water quality impairments and maintain good water quality. TCEQ analyzed effluent from the following facilities for dioxin and dioxin-like compounds: Albermarle, Atofina, Beechnut MUD, BP Solvay, Clean Harbors, Dow DP, DuPont, Equistar, Exxon, GB Biosciences, Newport MUD, OxyVinyls Battleground, OxyVinyls Deer Park, OxyVinyls La Porte, Rohm & Haas, Shell Chemical, Shell Refinery, Valero, Vopak, and several POTWs.

From 1999 to 2003 TCEQ conducted sampling at the facilities outfalls at Atofina, Shell, and BP Solvay and detected dioxin and dioxin-like compounds. The facilities use the dioxin congener concentrations measured by TCEQ to estimate the releases of dioxin and dioxin-like compounds that they report to TRI. Each facility updates its TRI releases each year by multiplying the same dioxin concentration by the facility's annual flow. Therefore, increases in TRI-reported releases of dioxin and dioxin-like compounds from year to year reflect increases in wastewater flow and not necessarily increases in dioxin discharges.

Table 11-12. OCPSF Facilities Reporting Dioxin Releases to TRI

| Facility Name<br>(Facility Location)           | TRI 2002                    |             | TRI 2003                    |             | Basis of Estimate                        | Was Dioxin Detected?  | Findings   |
|--|-----------------------------|-------------|-----------------------------|-------------|--|---|--|
|  | Pounds of Dioxin Discharged | Dioxin TWPE | Pounds of Dioxin Discharged | Dioxin TWPE |  |   |  |
| Atofina Petrochemicals Inc.<br>(La Porte, TX)  | 0.00310                     | 57,489      | 0.00000992                  | 799         | TCEQ sampling episode in 1999            | TCEQ detected 1,2,3,4,6,7,8-HpCDD, OCDD, and OCDF (TCEQ, 2003)              | TCEQ sampling at the final outfall for the facility's NPDES permit and provided one concentration that represented a mixture of dioxin congeners. Facility multiplies this concentration by the total wastewater flow for the outfall. Facility continues to use the TCEQ dioxin number every year for their TRI reports.                              |
| BP Solvay Polyethylene N.A.<br>(Deer Park, TX) | NR                          | NR          | 0.436                       | 678,344     | TCEQ sampling episode in 2002            | TCEQ detected 1,2,3,4,6,7,8-HpCDD, OCDD, and 1,2,3,4,7,8-HxCDF (TCEQ, 2003) | TCEQ sampling at the final outfall for the facility's NPDES permit and provided one concentration that represented a mixture of dioxin congeners. Facility multiplies this concentration by the total wastewater flow for the outfall. Facility continues to use the TCEQ dioxin number every year for their TRI reports.                              |
| Celanese Acetate Celco Plant<br>(Narrows, VA)  | 0.0000300                   | 941         | NR                          | NR          | Worst-case scenario engineering estimate | No  | Facility uses dissolving-grade wood pulp as a raw material. Celanese had reviewed a study that looked at the dioxin content of wood pulp and its potential to end up in stormwater. Wastewater monitoring data for Celanese's Form 2C application shows all nondetects for dioxin. Celanese stopped reporting water releases of dioxin to TRI in 2004. |
| Cytec Industries Inc.<br>(Wallingford, CT)     | 0.000198                    | 13,460      | 0.0000882                   | 5,982       | Engineering estimate                     | Not monitored   | Dioxin water release was based on an engineering estimate for the operation of an incinerator that was used to dry out biosolids. This incinerator is no longer in operation and site did not report dioxin to TRI for 2005.   |

Table 11-12 (Continued)

| Facility Name<br>(Facility Location)                               | TRI 2002                          |                | TRI 2003                          |                | Basis of<br>Estimate   | Was Dioxin<br>Detected?   | Findings   |
|--|-----------------------------------|----------------|-----------------------------------|----------------|--|---|--|
|  | Pounds of<br>Dioxin<br>Discharged | Dioxin<br>TWPE | Pounds of<br>Dioxin<br>Discharged | Dioxin<br>TWPE |  |   |  |
| Dow Chemical Co. Midland<br>Ops.<br>(Midland, MI)                  | 0.00948                           | 25,502         | NR                                | NR             | Routine<br>monitoring<br>conducted by<br>facility                  | Yes -<br>Reported all<br>congeners<br>except<br>1,2,3,6,7,8-<br>HxCDF, and<br>1,2,3,6,7,8-<br>HxCDD to<br>TRI for<br>2002/2003. | Dioxin sources include historical process and waste management units no longer in operation at the site. A very small amount may also come from an on-site incinerator. The TRI dioxin water release is a TM 17 value that sums the average congener concentrations from samples collected throughout the year. Dow uses EPA Method 1613B to analyze for dioxin and sets all concentrations that are below the detection limit to zero.                          |
| Du Pont Chambers Works<br>(Deepwater, NJ)                          | 0.00231                           | 334            | 0.000287                          | 0.580          | Engineering<br>estimate  | Not<br>monitored  | A contaminated ferric chloride additive used for solids settling in the wastewater treatment plant was the dioxin source. Du Pont used information from the vendor on the dioxin composition of the contaminated ferric chloride to estimate their TRI releases. The site has since stopped using ferric chloride for settling. The dioxin release included in the TRI 2004 database will be zero.   |
| Lyondell Chemical Co.<br>(Westlake, LA)                            | 0.00250                           | 219            | NR                                | NR             | Routine<br>monitoring<br>conducted by<br>facility                  | Yes – Did<br>not report a<br>distribution<br>to TRI for<br>2002.  | A small amount of dioxin is produced by an on-site hazardous waste incinerator scrubber. The bulk of the dioxin enters the plant with the source water from the Sabine River. The site monitors the intake and final effluent for dioxin, then calculates a balance to report what is discharged. The balance is reported to TRI.  |
| Sasol N.A. Inc.<br>(Baltimore, MD)                                 | 0.0000372                         | 3.26           | NR                                | NR             | Routine<br>monitoring<br>conducted by<br>facility                  | Yes –<br>Reported<br>1,2,3,4,6,7,8<br>-HpCDD<br>and OCDD<br>to TRI for<br>2002.   | Facility formerly operated a chlorination process that generated dioxin. They began sampling process wastewater and final effluent in 2001 and detected trace amounts of OCDD. The dioxin release reported to TRI was based on this single detected congener (concentration was just above the detection limit). The site stopped monitoring for dioxin in 2003 when the chlorination process was shut down. They no longer report dioxin water releases to TRI. |
| Sasol N.A. Inc. Lake Charles<br>Chemical Complex<br>(Westlake, LA) | 0.000882                          | 17,183         | 0.000882                          | 4,479          | Sampling<br>results from<br>studies<br>conducted<br>over the years | Yes -<br>Reported 17<br>congeners to<br>TRI for<br>2002/2003.   | Facility receives wastewater from the Georgia Gulf Lake Charles VCM plant. The VCM process wastewater is the source of dioxin.   |

Table 11-12 (Continued)

| Facility Name<br>(Facility Location)            | TRI 2002                          |                | TRI 2003                          |                | Basis of<br>Estimate                   | Was Dioxin<br>Detected?                                       | Findings   |
|---|-----------------------------------|----------------|-----------------------------------|----------------|--|---|--|
|   | Pounds of<br>Dioxin<br>Discharged | Dioxin<br>TWPE | Pounds of<br>Dioxin<br>Discharged | Dioxin<br>TWPE |  |   |  |
| Shell Chemical Co. Deer Park<br>(Deer Park, TX) | NR                                | NR             | 0.00216                           | 13,967         | TCEQ<br>sampling<br>episode in<br>2003 | TCEQ<br>detected 10<br>dioxin<br>congeners<br>(TCEQ,<br>2003) | TCEQ sampling at the outfall for the facility's chemical plant and provided dioxin congener concentration data for 17 dioxin congeners. Facility multiplies this concentration by the total wastewater flow for the outfall. Facility continues to use the TCEQ dioxin number every year for their TRI reports. Facility treats wastewater for an OxyVinyls EDC/VCM plant, which is a large source of dioxins in their wastewater. Facility has also identified other process sources that are small contributors of dioxin. |
| <b>OCPSF Category Total</b>                     | <b>0.0185</b>                     | <b>115,132</b> | <b>0.440</b>                      | <b>703,572</b> |  |   |  |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*; Telephone conversations with various OCPSF facility representatives and Meghan Kandle of Eastern Research Group, Inc. (ERG, 2006).

NR – Not reported.

TCEQ – Texas Commission on Environmental Quality.

TM-17 – Total mass of 17 dioxin and dioxin-like congeners.

EDC – Ethylene dichloride.

VCM – Vinyl chlorine monomer.

Based on the information in Table 11-12, EPA identified the following sources of dioxin in OCPSF wastewater:

- **Historical Processes** - Three facilities, Cytec Industries, Dow Chemical, and Sasol Baltimore, MD, reported dioxin to TRI based on processes that are no longer in operation. Dow and Sasol did not report discharges of dioxin and dioxin-like compounds to TRI for 2003.
- **Raw Materials** - Two facilities, DuPont Chambers Works and Celanese Acetate, estimated discharges of dioxin and dioxin-like compounds based on contamination of raw materials. Celanese's estimate was based on theoretical contamination of wood pulp and DuPont's estimate was based on actual contamination of ferric chloride. Celanese stopped reporting discharges of dioxin and dioxin-like compounds to TRI in 2003, and DuPont stopped reporting dioxin and dioxin-like compounds to TRI in 2004 (U.S. EPA, 2006).
- **Vinyl Chloride Wastewater** - Two facilities, Sasol Lake Charles, LA and Shell Deer Park, TX, treat wastewater from nearby vinyl chloride monomer plants, which are the major source of the dioxin and dioxin-like compounds that the facility reports to TRI. As discussed in Section 11.1.3, EPA is reviewing production of vinyl chloride monomer as part of the CCH rulemaking effort.
- **Wet Air Pollution Controls** - One facility, Lyondell, stated that an on-site incinerator is the source of dioxin and dioxin-like compounds that was reported to TRI for 2002. The facility stated that the amount of dioxin and dioxin-like compounds discharged by the incinerator scrubber is small (only 219 TWPE in Table 11-12). Lyondell did not report discharges of dioxin and dioxin-like compounds to TRI for 2003 or 2004 (U.S. EPA, 2006).
- **No Process Source Identified** - Facility contacts at Atofina and BP Solvay could not identify a potential process source for the dioxin and dioxin-like compounds that TCEQ detected at their outfalls.

## 11.7 OCPSF Category PACs Discharges

EPA did not identify PACs as a pollutant of concern during the 2005 annual review. The results of the 2006 annual review show a large increase in TRI TWPE associated with PACs from 2002 to 2003. In addition, benzo(a)pyrene is a top pollutant in terms of PCS TWPE for the 2006 review. The following subsections discuss EPA's review of OCPSF facilities that report PACs discharges to TRI and PCS.

### 11.7.1 OCPSF Facilities Reporting PACs to TRI

Table 11-13 lists the OCPSF facilities that reported discharges of PACs to TRI for 2002 and 2003. One facility, DSM Chemicals in Augusta, GA, contributed more than 90 percent of the PACs TWPE for 2003, but did not report PACs discharges for 2002. EPA contacted DSM Chemicals to discuss the basis of estimate for the 2003 TRI-reported PACs discharges (Connell, 2006). DSM confirmed that the TRI-reported discharge is based on measured concentrations of three PACs congeners: benzo(a)pyrene, dibenzo(a,h)anthracene, and indeno-1,2,3-c-pyrene. The facility samples for PACs and other priority pollutants once per year. Prior to 2003, the sampling did not include data on PACs concentrations. DSM suspects that the Number 2 fuel oil used at the site is the source of PACs in their wastewater.

In 2004, EPA reviewed the coal tar refining sector of the OCPSF Category based on discharges of PACs reported to TRI for 2000. EPA identified three U.S. coal tar refining companies (10 facilities) operating in 2000: Honeywell International, Inc., Koppers Industries, Inc., and Reilly Industries, Inc. Seven of these facilities continue to report discharges of PACs to TRI and are listed in Table 11-13. Since 2000, Honeywell, Inc. closed all three of its coal tar refining operations, and Reilly Tar & Chemical Company closed its Cleveland, OH facility. As of 2004, six facilities owned by two companies continued to refine coal tar in the United States. EPA's review of the coal tar industry concluded that the industry was declining, and that the PACs discharges were at concentrations near or at treatable levels. As a result, EPA determined that, based on the information available in 2004, it was not appropriate to select coal tar refining sector of the OCPSF Category for possible effluent guidelines revision.

In addition to coal tar refiners, Table 11-13 lists four facilities that reported releases of PACs to TRI for 2002 or 2003:

- DSM Chemicals in Augusta, GA produces caprolactam – a raw material for the production of nylon-6, cyclohexanone, ammonium sulphate for fertilizer use, and polyester resins for the powder coating industry (DSM, 2006);
- DuPont Chambers Works produces fluorochemicals, elastomers, and hytrel polyester elastomer (U.S. EPA, 2004);
- Neutrogena in Los Angeles, CA packages toiletries and soaps (Food & Drug Packaging, 2004); and
- Sasol NA in Baltimore, MD produces commodity and specialty chemicals for soaps, detergents and personal care products (Sasol, 2006).

Table 11-13. OCPSF Facilities Reporting PACs Releases to TRI

| Facility Name  | Facility Location     | TRI 2002                          |  |              | TRI 2003                          |  |               |
|--|-----------------------|-----------------------------------|--|--------------|-----------------------------------|--|---------------|
|  |                       | PAC Discharge before POTW Removal | Total PAC Pounds Released <sup>a</sup> | PAC TWPE     | PAC Discharge before POTW Removal | Total PAC Pounds Released <sup>a</sup> | PAC TWPE      |
| DSM Chemicals North America Inc.                           | Augusta, GA           | NA                                | NA                                     | NA           | 611                               | 611                                    | 61,503        |
| Du Pont Chambers Works                                     | Deepwater, NJ         | 15.0                              | 15.0                                   | 1,510        | 32.0                              | 32.0                                   | 3,221         |
| <i>Honeywell International, Inc.<sup>b</sup></i>           | <i>Birmingham, AL</i> | <i>6.00</i>                       | <i>6.00</i>                            | <i>604</i>   | <i>6.00</i>                       | <i>6.00</i>                            | <i>604</i>    |
| <i>Honeywell International, Inc.<sup>b</sup></i>           | <i>Ironton, OH</i>    | <i>7.00</i>                       | <i>7.00</i>                            | <i>705</i>   | NA                                | NA                                     | NA            |
| Koppers Inc. <sup>b</sup>                                  | Cicero, IL            | 0.570                             | 0.0420                                 | 4.22         | 0.600                             | 0.0442                                 | 4.45          |
| Koppers Industries, Inc. Follansbee Tar Plant <sup>b</sup> | Follansbee, WV        | 4.00                              | 4.00                                   | 403          | 4.00                              | 4.00                                   | 403           |
| Koppers Industries, Inc. Woodward Tar Plant <sup>b</sup>   | Dolomite, AL          | 12.6                              | 12.6                                   | 1,268        | 20.0                              | 20.0                                   | 2,013         |
| Neutrogena Corp.   | Los Angeles, CA       | 0.130                             | 0.00957                                | 0.963        | 0.0100                            | 0.000736                               | 0.0741        |
| Reilly Industries, Inc. <sup>b</sup>                       | Granite City, IL      | 16.0                              | 1.18                                   | 119          | 20.0                              | 1.47                                   | 148           |
| Reilly Industries, Inc. <sup>b</sup>                       | Lone Star, TX         | NA                                | NA                                     | NA           | 5.00                              | 0.368                                  | 37.0          |
| Sasol N.A., Inc.   | Baltimore, MD         | NA                                | NA                                     | NA           | 0.300                             | 0.300                                  | 30.2          |
| <b>Total</b>   |                       | <b>61.3</b>                       | <b>45.8</b>                            | <b>4,613</b> | <b>699</b>                        | <b>675</b>                             | <b>67,964</b> |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

*Italics* denote facilities no longer in operation.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>b</sup>Facility is a coal tar refiner and was included in EPA's detailed study of the OCPSF Category for the 2004 Plan.  
NA – Not applicable. Facility did not report PACs releases for reporting year.

### 11.7.2 OCPSF Facilities Reporting Benzo(a)pyrene Discharges to PCS

Table 11-14 lists the OCPSF facilities that report discharges of benzo(a)pyrene to PCS for 2002. As shown in Table 11-14, three facilities contribute 74 percent of the total benzo(a)pyrene TWPE for the OCPSF Category. EPA contacted GE Silicones and Bayer Cropscience to confirm the benzo(a)pyrene discharges in PCS (Heintzman, 2006; Smith, 2006). Both facilities stated that benzo(a)pyrene has never been measured at concentrations above its detection limit. According to Bayer Cropscience, the facility's permit writer directs the facility to report nondetects at their detection limit concentration and use the detection limit and wastewater flow to report the mass discharge on its Discharge Monitoring Report (DMR). GE Silicones contacts stated that they report benzo(a)pyrene as a nondetect on their DMR. However, the state of West Virginia does not include the less than (<) sign to label the concentration as a detection limit when it uploads the DMR data into PCS. As shown in Table 11-14, 10 of the 18 facilities for which PCS has discharge data for benzo(a)pyrene are located in West Virginia. Therefore, EPA suspects that some of the benzo(a)pyrene loads in PCS may be calculated using detection limit concentrations and not represent actual discharges of benzo(a)pyrene.

**Table 11-14. OCPSF Facilities for which PCS includes Benzo(a)pyrene 2002 Discharge Data**

| Facility Name                  | Facility Location    | Pounds Discharged | TWPE          | % of Total TWPE |
|--------------------------------|----------------------|-------------------|---------------|-----------------|
| GE Silicones LLC               | Friendly, WV         | 82.5              | 8,304         | 28.6%           |
| Celanese Acetate LLC/Celriver  | Rock Hill, SC        | 67.1              | 6,751         | 23.3%           |
| Bayer Cropscience Institute    | Institute, WV        | 64.8              | 6,523         | 22.5%           |
| Invista S.A.R.L./Spartanburg   | Spartanburg, SC      | 21.2              | 2,135         | 7.4%            |
| E I Dupont De Nemours & Co     | Parkersburg, WV      | 11.0              | 1,105         | 3.8%            |
| Flexsys America LP             | Nitro, WV            | 10.0              | 1,010         | 3.5%            |
| Honeywell Nylon LLC/Columbia   | Columbia, SC         | 8.28              | 833           | 2.9%            |
| Ripplewood Phosphorus U.S. LLC | Gallipolis Ferry, WV | 7.20              | 725           | 2.5%            |
| Nalco Company                  | Garyville, LA        | 6.48              | 652           | 2.2%            |
| Sunoco, Inc. (R & M)           | Kenova, WV           | 3.60              | 362           | 1.2%            |
| Bayer Materialscience, LLC     | New Martinsville, WV | 3.60              | 362           | 1.2%            |
| Koppers Industries, Inc.       | Follansbee, WV       | 1.05              | 106           | 0.4%            |
| Honeywell International, Inc.  | Fairfield, AL        | 0.504             | 50.7          | 0.2%            |
| Crompton Corporation           | Morgantown, WV       | 0.360             | 36.2          | 0.1%            |
| US Filter Operating Services   | Clinton, IA          | 0.300             | 30.2          | 0.1%            |
| Crompton Corporation           | Morgantown, WV       | 0.0360            | 3.62          | 0.01%           |
| <b>Total</b>                   |                      |                   | <b>28,990</b> |                 |

Source: PCSLoads2002\_v4.

## 11.8 OCPSF Water Conservation through Mass-Based Permit Limits

EPA's evaluation of options for promoting water conservation through mass-based limits is discussed in a memorandum entitled, Options for Promoting Water Conservation Through the use of Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) Mass-based Limits, dated November 2006 (Johnston, 2006).

## 11.9 OCPSF Category Conclusions

- The OCPSF Category was selected for detailed review because of high TWPE in the 2005 and 2006 annual reviews.
- Dioxin and dioxin-like compounds is the highest ranking pollutant in terms of TWPE in the TRI 2002 and 2003 databases. EPA contacted the facilities that reported discharges of dioxin and dioxin-like compounds to TRI in either 2002 or 2003 to determine the basis of estimate for the dioxin and dioxin-like compounds release. EPA concludes the following based on its conversations with the facilities:
  - Currently, no OCPSF facility that reported dioxin and dioxin-like compounds suspects a manufacturing process as the major source of dioxin and dioxin-like compounds.
  - Facilities that did identify a process source of dioxin and dioxin-like compounds have stopped operating the dioxin-generating process.
  - Four out of 10 facilities that report dioxin and dioxin-like compounds to TRI in either 2002 or 2003 stated that they did not report a dioxin and dioxin-like compounds release to TRI for subsequent reporting years. Three of these facilities stopped reporting because the facilities stopped using the operation or material that was the suspected source of dioxin and dioxin-like compounds. One facility stopped reporting dioxin and dioxin-like compounds because the estimate was based on theoretical contamination from a raw material and the facility has never detected dioxin in its wastewater.
  - Three facilities that report dioxin and dioxin-like compounds discharge wastewater to the Houston Ship Channel. TCEQ conducted sampling at these facilities' outfalls and detected dioxin. The facilities use the dioxin and dioxin-like compounds concentration measured by TCEQ to estimate the dioxin and dioxin-like compounds releases they report to TRI. Each facility updates its TRI releases each year by multiplying the same dioxin and dioxin-like compounds concentration by the facility's annual flow. Therefore, increases in estimated dioxin and dioxin-like

compounds releases from year to year reflect increases in wastewater flow and not necessarily increases in dioxin and dioxin-like compounds discharges. TCEQ is developing a dioxin TMDL to address these discharges.

- HCB and PACs also rank high in terms of TRI TWPE for the OCPSF Category. The majority of the TRI TWPE for each pollutant is from one facility. EPA has contacted these two facilities to determine the basis of estimate for the TRI-reported discharges. Future OCPSF category review by EPA could focus on:
  - Verification of HCB releases reported to TRI including method of estimation, effluent concentrations, and review of process sources; and
  - Further review of non-coal-tar-refining facilities reporting discharges of PACs to TRI including the basis of estimate for the PACs release and review of process sources.
- HCB was a top pollutant in *PCSLoads2002\_v2* for the OCPSF Category for the 2005 annual review. Discharges of HCB decreased from 1,090,000 TWPE to 103,420 TWPE during the 2006 annual review based on comments from ACC. ACC commented that the loads for the top HCB discharger were calculated using the HCB detection limit and the facility's wastewater flow, and that the facility never detected HCB in its wastewater. EPA's review of the remaining HCB dischargers indicates that additional HCB loads may be based on concentrations that were reported at the HCB detection limit. Future review could focus on verifying HCB discharges in PCS.
- Benzo(a)pyrene is a top pollutant in *PCSLoads2002\_v4* for the OCPSF Category. Three facilities contribute 74 percent of the total TWPE. Based on facility contacts, EPA suspects that some of the benzo(a)pyrene discharges in PCS may be based on detection limit concentrations and do not represent actual discharges of benzo(a)pyrene. Future review could focus on verifying benzo(a)pyrene discharges in PCS and further evaluating facilities reporting discharges to PCS including information on effluent concentrations, manufacturing processes, and potential process sources.

#### **11.10 OCPSF Category References**

ACC. 2005. Comment submitted by Bob Elam, Director, Environment, American Chemistry Council (ACC). "Re: EPA Docket ID Numbers OW-2004-0032 and OW-2002-0020: Notice of Preliminary 2006 Effluent Guidelines Program Plan; Request for Comments." (November 28). EPA-HQ-OW-2004-0032-1068.

Connell, Beth. 2006. Telephone conversation with Beth Connell of DSM Chemicals, Augusta, GA, and Meghan Kandle of Eastern Research Group, Inc. “PACs Discharges reported to TRI for 2003.” (August 4). DCN 03704.

DSM. 2006. DSM in the United States. Available online at [http://www.dsm.com/en\\_US/html/about/location\\_finder.htm](http://www.dsm.com/en_US/html/about/location_finder.htm). Date accessed: June 21. DCN 03708.

ERG. 2006. Eastern Research Group, Inc. Telephone conversations with various OCPSF facility representatives and Meghan Kandle of Eastern Research Group, Inc. “Basis of Estimation for Dioxin Releases Reported to TRI.” DCN 03706.

Food and Drug Packaging. 2004. “Top 25 Personal Care Packagers.” *Food and Drug Packaging*. (July). DCN 03709.

Heintzman, Dennis. 2006. Telephone conversation with Dennis Heintzman of GE Silicones, Friendly, WV, and Meghan Kandle of Eastern Research Group, Inc. “Benzo(a)pyrene Discharges in PCS for 2002.” (August 3). DCN 03705.

Johnston, Carey. 2006. U.S. EPA. Memorandum to Public Record for the Effluent Guidelines Program Plan 2005/2006. “Options for Promoting Water Conservation Through the use of Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) Mass-based Limits.” (November). DCN 03702.

Olson, Alan. 2006. Telephone conversation with Alan Olson of Ferro Corporation, Bridgeport, NJ, and Dan-Tam Nguyen of Eastern Research Group, Inc. “Information Collection Effort to Finalize Mailing List for CCH Questionnaire.” (July 12). DCN 03707.

Sasol. 2006. Sasol North Americal, Inc. – Baltimore, MD. Available online at <http://www.sasolbaltimore.com>. Date accessed: June 21. DCN 03710.

Smith, Gordon. 2006. Telephone conversation with Gordon Smith of Bayer Cropscience, Institute, WV, and Meghan Kandle of Eastern Research Group, Inc. “Benzo(a)pyrene Discharges in PCS for 2002.” (August 3). DCN 03703.

TCEQ. 2003. Texas Commission on Environmental Quality. Total Maximum Daily Load Program. *Total Maximum Daily Loads for Dioxins in the Houston Ship Channel. Final Report*. (October). DCN 03712.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

U.S. EPA. 2005c. *Product and Product Group Discharges Subject to Effluent Limitations and Standards for the Organic Chemicals, Plastics, and Synthetic Fibers Point Source Category - 40 CFR 414*. Washington, DC. (April). DCN 03711.

## **12.0 ORE MINING AND DRESSING (40 CFR PART 440)**

EPA selected the Ore Mining and Dressing (Ore Mining) Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review, particularly discharges reported to PCS in 2002 (U.S. EPA, 2005b) (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous review of this industry (U.S. EPA, 2004). This section summarizes the 2005 annual review and also describes the results of EPA's 2006 annual review of the discharges associated with the Ore Mining Category. EPA's 2006 annual review builds on the 2005 annual review.

### **12.1 Ore Mining Category Background**

This subsection provides background on the Ore Mining Category including a brief profile of the ore mining industry and background on 40 CFR Part 440.

#### **12.1.1 Ore Mining Industry Profile**

The ore mining and dressing industry includes facilities that mine, mill, or prepare 23 separate metal ores (U.S. EPA, 2005b). This industry is divided into nine SIC codes, as shown in Table 12-1. The following SIC codes are not required to report discharges to TRI:

- 1011: Iron Ores;
- 1081: Metal Mining Services; and
- 1094: Uranium-Radium-Vanadium Ores.

Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census data by equivalent SIC code. The facilities in SIC code 1081 subject to the Ore Mining ELGS do not translate directly to a NAICS code, and EPA could not determine the number of facilities in the 2002 U.S. Economic Census for SIC code 1081.

Of the almost 400 ore mines in the 2002 U.S. Economic Census, only 81 (20 percent) reported to TRI in 2002, because facilities in SIC codes 1011, 1081, and 1094 are not required to report discharges to TRI. Of the 35 ore mines reporting wastewater discharges in TRI, most facilities are direct dischargers. Table 12-2 presents the types of discharges reported by facilities in the 2002 TRI database.

#### **12.1.2 40 CFR Part 440**

EPA first promulgated ELGs for the Ore Mining Category (40 CFR Part 440) on December 3, 1982 (47 FR 54609). This category consists of 12 subcategories, as shown in Table 12-3 with the related SIC codes and descriptions of the subcategories' applicability (U.S. EPA, 1982; U.S. EPA, 1988). BAT limitations are set equal to BPT levels for priority pollutants for this category. The priority pollutants arsenic, cadmium, copper, lead, mercury, nickel, and zinc, are regulated in at least one subcategory (U.S. EPA, 2005b). None of the subcategories include PSES or PSNS limitations.

**Table 12-1. Number of Facilities in Ore Mining SIC Codes**

| SIC Code                               | 2002 U.S. Economic Census | 2002 PCS   | 2002 TRI        | 2003 TRI        |
|--|---------------------------|------------|-----------------|-----------------|
| 1011: Iron Ores                        | 24                        | 6          | NR <sup>a</sup> | NR <sup>a</sup> |
| 1021: Copper Ores                      | 33                        | 15         | 17              | 20              |
| 1031: Lead and Zinc Ores               | 22                        | 27         | 13              | 12              |
| 1041: Gold Ores                        | 180                       | 28         | 34              | 32              |
| 1044: Silver Ores                      | 11                        | 5          | 3               | 3               |
| 1061: Ferroalloy Ores, Except Vanadium | 72                        | 6          | 7               | 7               |
| 1081: Metal Mining Services            | NA <sup>b</sup>           | 0          | NR <sup>a</sup> | NR <sup>a</sup> |
| 1094: Uranium-Radium-Vanadium Ores     | 17                        | 17         | NR <sup>a</sup> | NR <sup>a</sup> |
| 1099: Miscellaneous Metal Ores, NEC    | 39                        | 6          | 6               | 7               |
| <b>Total</b>                           | <b>&gt;398</b>            | <b>110</b> | <b>80</b>       | <b>81</b>       |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Facilities in this SIC code are not required to report to TRI.

<sup>b</sup>Poor bridging between NAICS and SIC codes. Number of facilities could not be determined.

NR – Not reported.

NA – Not applicable.

NEC – Not elsewhere classified.

**Table 12-2. Ore Mining Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code                               | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|--|---------------------------------|-----------------------------------|--|------------------------------|
| 1011: Iron Ores                        | NR <sup>a</sup>                 | NR <sup>a</sup>                   | NR <sup>a</sup>                              | NR <sup>a</sup>              |
| 1021: Copper Ores                      | 6                               | 0                                 | 0  | 12                           |
| 1031: Lead and Zinc Ores               | 10                              | 0                                 | 0  | 2                            |
| 1041: Gold Ores                        | 8                               | 4                                 | 0  | 22                           |
| 1044: Silver Ores                      | 1                               | 0                                 | 0  | 2                            |
| 1061: Ferroalloy Ores, Except Vanadium | 3                               | 0                                 | 0  | 4                            |
| 1081: Metal Mining Services            | NR <sup>a</sup>                 | NR <sup>a</sup>                   | NR <sup>a</sup>                              | NR <sup>a</sup>              |
| 1094: Uranium-Radium-Vanadium Ores     | NR <sup>a</sup>                 | NR <sup>a</sup>                   | NR <sup>a</sup>                              | NR <sup>a</sup>              |
| 1099: Miscellaneous Metal Ores, NEC    | 3                               | 0                                 | 0  | 4                            |

Source: *TRIRelases2002\_v4*.

<sup>a</sup>Facilities in this SIC code are not required to report to TRI.

NR – Not reported.

NEC – Not elsewhere classified.

**Table 12-3. Ore Mining Category Subcategory Applicability**

| Sub-part | Subcategory Title                                   | Related SIC Code(s)   | Subcategory Applicability   |
|----------|---|---|---|
| A        | Iron Ore  | 1011: Iron Ores   | Iron Ore Mines and Mills using Physical or Chemical Separation or Magnetic & Physical Separation in the Mesabi Range  |
| B        | Aluminum Ore  | 1099: Miscellaneous Metal Ores, NEC   | Bauxite Mines Producing Aluminum Ore  |
| C        | Uranium, Radium, & Vanadium Ores                    | 1094: Uranium-Radium-Vanadium Ores  | Open-Pit or Underground Mines and Mills using Acid Leach, Alkaline Leach, or Combined Acid & Alkaline Leach to Produce Uranium, Radium, & By-product Vanadium   |
| D        | Mercury Ore   | 1099: Miscellaneous Metal Ores, NEC   | Open-Pit or Underground Mercury Ore Mines and Mills using Gravity Separation or Froth-Flotation   |
| E        | Titanium Ores                                       | 1099: Miscellaneous Metal Ores, NEC   | Titanium Ore Mines from Lode Deposits and Mills using Electrostatic, Magnetic & Physical Separation, or Flotation; Dredge Mines and Mills for Placer Deposits of Rutile, Ilmenite, Leucoxene, Monazite, Zircon, and Other Heavy Metals  |
| F        | Tungsten Ore  | 1061: Ferroalloy Ores, Except Vanadium  | Tungsten Mines and Mills using Gravity Separation or Froth-Flotation  |
| G        | Nickel Ore  | 1061: Ferroalloy Ores, Except Vanadium  | Nickel Ore Mines and Mills  |
| H        | Vanadium Ore (Mined Alone, not as By-product)       | 1094: Uranium-Radium-Vanadium Ores  | Vanadium Ore Mines and Mills  |
| I        | Antimony Ore  | 1099: Miscellaneous Metal Ores, NEC   | Antimony Ore Mines and Mills  |
| J        | Copper, Lead, Zinc, Gold, Silver, & Molybdenum Ores | 1021: Copper Ores<br>1031: Lead and Zinc Ores<br>1041: Gold Ores<br>1044: Silver Ores<br>1061: Ferroalloy Ores, Except Vanadium | Copper, Lead, Zinc, Gold, Silver, & Molybdenum Ore Open-Pit or Underground Mines, except for Placer Deposits, and Mills using Froth-Flotation and/or Other Separation Techniques; Mines and Mills using Dump, Heap, In-Situ Leach, or Vat-Leach to Extract Copper from Ores or Ore Waste Materials; Gold or Silver Mills using Cyanidation; Except for Mines and Mills from the Quartz Hill Molybdenum Project in the Tongass National Forest, Alaska |
| K        | Platinum Ore  | 1099: Miscellaneous Metal Ores, NEC   | Platinum Ore Mines and Mills  |
| M        | Gold Placer Mine                                    | 1041: Gold Ores   | Placer Deposit Gold Ore Mines, Dredges, & Mills using Gravity Separation  |

Source: *Development Document for Effluent Limitations Guidelines and Standards for the Ore Mining and Dressing Point Source Category* (U.S. EPA, 1982); *Development Document for Effluent Limitations Guidelines and Standards for the Ore Mining and Dressing Point Source Category Gold Placer Mine Subcategory* (U.S. EPA, 1988).  
NEC - Not elsewhere classified.

**12.2 Ore Mining Category 2005 Annual Review**

This subsection discusses EPA’s 2005 annual review of the Ore Mining Category including the screening-level review and category-specific review.

**12.2.1 Ore Mining 2005 Screening-Level Review**

Table 12-4 presents the Ore Mining Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 12-4. Ore Mining Category 2005 Screening-Level Review Results**

| Rank | Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|------|-----------------------|----------------------------|----------------------------|------------|
| 7    | Ore Mining            | 406,548                    | 66,544                     | 473,093    |

Source: *2005 Annual Screening-Level Analysis* (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

**12.2.2 Ore Mining Category 2005 Pollutants of Concern**

Table 12-5 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. The top five pollutants account for approximately 90 percent of the 2002 TRI and PCS combined TWPE.

**12.3 Potential New Subcategories for the Ore Mining Category**

EPA did not identify any potential new subcategories for the Ore Mining Category.

**12.4 Ore Mining Category 2006 Annual Review**

Following EPA’s 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Ore Mining Category. EPA obtained additional data and identified facilities classified in the wrong category.

**Table 12-5. 2005 Annual Review: Ore Mining Category Pollutants of Concern**

| Pollutant                        | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |               |
|----------------------------------|--|-----------------------|----------------|--|-----------------------|---------------|
|                                  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Molybdenum                       | 4  | 770,329               | 155,174        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |               |
| Cyanide                          | 9  | 109,018               | 121,764        |  |                       |               |
| Cadmium and Cadmium Compounds    | 29   | 2,360                 | 54,556         | 10   | 1,046                 | 24,181        |
| Lead and Lead Compounds          | 32   | 10,406                | 23,309         | 24   | 5,672                 | 12,705        |
| Arsenic and Arsenic Compounds    | 13   | 3,143                 | 12,701         | 8  | 2,562                 | 10,352        |
| Vanadium and Vanadium Compounds  | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 2  | 147,060               | 5,147         |
| Silver and Silver Compounds      |  |                       |                | 1  | 250                   | 4,118         |
| <b>Ore Mining Category Total</b> | <b>73<sup>c</sup></b>  | <b>625,769,753</b>    | <b>406,548</b> | <b>34<sup>c</sup></b>  | <b>541,214</b>        | <b>66,544</b> |

Source: *TRIRelases2002\_v2*; *PCSLoads2002\_v2*.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

#### 12.4.1 Ore Mining Category Facility Classification Revisions

As part of the 2006 annual review, EPA reviewed permits for facilities in the SIC codes corresponding to the Nonferrous Metals Manufacturing Category. This review is discussed in Section 10.4.2. EPA determined that discharges from two facilities it had classified as nonferrous metals manufacturers, ALCOA Bauxite and Kennecott Utah, were subject to the Ore Mining ELGS. ALCOA Bauxite's discharges result from the reclaimed mine drainage and maintenance of the closed ALCOA and Reynolds Metals Bauxite Residue Disposal Areas. The facility's discharges are regulated by 40 CFR Part 440 (ADEQ, 2005a; ADEQ, 2005b). Kennecott Utah's discharges are from an integrated copper mine, smelter, and refiner. The majority of the facility's discharges are from outfalls regulated by 40 CFR Part 440 (UDEQ, Unknown). EPA changed the category classifications of these facilities in the revised databases, *TRIRelases2002\_v4* and *PCSLoads2002\_v4*, as described in Section 4.5 of this document.

#### 12.4.2 Ore Mining Category 2006 Screening-Level Review

The results of the 2006 screening-level review are the TRI and PCS rankings after the revisions described in Section 4.2 of this document. This accounts for methodology changes described in Section 4.2 and changes made based on permit review. For the Ore Mining Category, the most significant changes are also described in Section 12.4.1. Table 12-6 shows the 2006 screening-level TWPE estimated for the Ore Mining Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 12-6. Ore Mining Category 2006 Screening-Level Review Results**

| Point Source Category | PCS 2002 TWPE <sup>a</sup> | TRI 2002 TWPE <sup>b</sup> | TRI 2003 TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Ore Mining            | 410,266                    | 70,214                     | 77,649                     |

Sources: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 12.4.3 Ore Mining Category 2006 Pollutants of Concern

Table 12-7 presents the pollutants of concern for the Ore Mining Category identified in the 2006 annual review. Molybdenum and cyanide discharges from PCS are responsible for approximately 68 percent of the category's TWPE in *PCSLoads2002\_v4*. One facility, North Shore Mining, Silver Bay, MN, is responsible for approximately 93 percent of the molybdenum TWPE in *PCSLoads2002\_v4*. North Shore Mining reports discharges as SIC code 1011: Iron Ores. Another facility, Zortman Mining Inc., Zortman, MT, is responsible for approximately 98 percent of the cyanide TWPE in *PCSLoads2002\_v4*. Zortman Mining Inc. reports discharges as SIC code 1041: Gold Ores.

### 12.5 Ore Mining Category Stormwater Multi-Sector General Permits (MSGP)

EPA received comments from previous effluent guidelines program plans stating that discharges from facilities in this category may not be adequately quantified in the PCS and TRI databases and that these discharges can cause significant water quality impacts (Johnson, 2003). In particular, EPA is evaluating the impact of discharges from waste rock and overburden piles, which are not now regulated by effluent guidelines, and whether these discharges are adequately controlled by the Storm Water Multi-Sector General Permits (MSGP).<sup>13</sup> See 65 FR 64746 (Oct. 30, 2000 and 70 FR 72116, December 1, 2005).

The MSGP includes very general benchmark values for sampling and general requirements to develop a stormwater pollution prevention plan, but does not establish numeric limits or stormwater containment/treatment requirements. The MSGP establishes benchmark monitoring for pollutants including TSS, pH, hardness, arsenic, beryllium, cadmium, copper, iron, lead, manganese, mercury, nickel, selenium, silver, zinc, and uranium.<sup>14</sup> The data from this sampling are now available due to the 2000 MSGP requirements.

<sup>13</sup>Mine sites not regulated by the MSGP include: (1) sites with their stormwater discharges regulated by an individual permit; and (2) sites without any discharge of stormwater. A facility has the option of obtaining an individual permit for stormwater discharges instead of requesting coverage under the MSGP; however, in practice this is seldom done. The current MSGP expires this year; however EPA intends to reissue it. Almost all mine sites discharge stormwater (e.g., stormwater discharges from haul roads, process areas, equipment storage areas, mine waste rock).

<sup>14</sup>Table G-4 of the MSGP lists what wastewaters from mining activities are covered by Part 440 and what wastewaters are to be covered by the industrial MSGP. In response to litigation from the National Mining Association, EPA revised its interpretation of applicability for wastewaters from hard rock mining operations. Under the revised interpretation, runoff from waste rock and overburden piles is not subject to effluent guidelines unless it naturally drains (or is intentionally diverted) to a point source and combines with "mine drainage" that is otherwise subject to the effluent guidelines (65 FR 64774, October 30, 2000).

Table 12-7. 2006 Annual Review: Ore Mining Category Pollutants of Concern

| Pollutant                        | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |               | 2003 TRI <sup>b</sup>  |                       |               |
|----------------------------------|--|-----------------------|----------------|--|-----------------------|---------------|--|-----------------------|---------------|
|                                  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Molybdenum                       | 4  | 770,329               | 155,174        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |               | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |               |
| Cyanide                          | 7  | 109,018               | 121,764        |  |                       |               |  |                       |               |
| Cadmium and Cadmium Compounds    | 26   | 2,360                 | 54,556         | 10   | 848                   | 19,603        | 9  | 642                   | 14,878        |
| Lead and Lead Compounds          | 30   | 10,406                | 23,309         | 25   | 5,526                 | 12,378        | 23   | 5,153                 | 11,542        |
| Arsenic and Arsenic Compounds    | 11   | 3,143                 | 12,701         | 9  | 3,312                 | 13,383        | 8  | 5,882                 | 23,770        |
| Silver and Silver Compounds      | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 2  | 500                   | 8,235         | 2  | 500                   | 8,235         |
| Vanadium and Vanadium Compounds  |  |                       |                | 3  | 147,310               | 5,156         | 3  | 240,200               | 8,407         |
| <b>Ore Mining Category Total</b> | <b>50<sup>c</sup></b>  | <b>702,310,349</b>    | <b>410,266</b> | <b>35<sup>c</sup></b>  | <b>462,061</b>        | <b>70,214</b> | <b>32<sup>c</sup></b>  | <b>597,196</b>        | <b>77,649</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

Commenters on previous effluent guidelines program plans have requested that EPA reverse its decision to exclude discharges from waste rock and overburden piles from the Part 440 applicability definition of "mine drainage." Specifically, commenters suggested that EPA should conduct a rulemaking to address discharges from waste rock piles, overburden piles, and other sources of water pollution at mine sites that are not currently covered by Part 440 (see 63 FR 47285, September 4, 1998).

The Agency will review the MSGP data for usefulness in revising the effluent guidelines, for example, to determine the mass and concentrations of pollutants discharged and effluent variability associated with these discharges, and to evaluate the performance and effectiveness of the permit controls (primarily "best management practices") at reducing pollutants. Additionally, EPA may gather other relevant data (such as cost data) on wastewater treatment technologies for this category. Preliminary MSGP data indicate high concentrations of metals in active and inactive mine site runoff. The volumes of discharge can be significant due to the large land area covered by the mine sites. Additionally, EPA Regions are evaluating whether states are adequately addressing mine site runoff. Finally, EPA is also investigating the potential for facilities in this category to contaminate ground water and, through infiltration and inflow, adversely affect POTW operations (U.S. EPA, 2002).

## **12.6 Ore Mining Category Conclusions**

- The high TWPE ranking for the Ore Mining Category in the 2005 annual review was due to discharges of molybdenum and cyanide reported to PCS.
- After EPA revised the databases, the facilities with discharges subject to the Ore Mining ELGs account for 480,480 TWPE using combined TRI and PCS data from 2002.
- EPA determined there is incomplete data available for a full analysis of the Ore Mining Category. EPA intends to continue reviewing the ore mining industry for the 2007/2008 planning cycle.

## **12.7 Ore Mining Category References**

ADEQ. 2005a. Arkansas Department of Environmental Quality. Authorization to Discharge Under the National Pollutant Discharge Elimination System and the Arkansas Water and Air Pollution Control Act Fact Sheet for NPDES AR0000582 – ALCOA Bauxite Works, Bauxite, AR. Little Rock, AR. (May 23). DCN 03313.

ADEQ. 2005b. Arkansas Department of Environmental Quality. Authorization to Discharge Under the National Pollutant Discharge Elimination System and the Arkansas Water and Air Pollution Control Act NPDES AR0000582 – ALCOA Bauxite Works, Bauxite, AR. Little Rock, AR. (May 31). DCN 03313.

Johnson, Carey. 2003. U.S. EPA. Memorandum to Public Record for the Effluent Guidelines Program Plan for 2004/2005. "Description and Results of EPA Methodology to Synthesize

Screening Level Results for the CWA 304(m) Effluent Guidelines Program Plan for 2004/2005.” (December 23). DCN 00548.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1982. *Development Document for Effluent Limitations Guidelines and Standards for the Ore Mining and Dressing Point Source Category*. EPA-440/1-82/061. Washington, DC.

U.S. EPA. 1988. *Development Document for Effluent Limitations and Guidelines for New Source Performance Standards for the Ore Mining and Dressing Point Source Category Gold Placer Mine Subcategory*. EPA-440/1-88-061. Washington, DC.

U.S. EPA. 2002. EPA Issues Draft Discharge Permits and Proposed Variances for Three Silver Valley Wastewater Treatment Plants. *Environmental Fact Sheet*. (August). DCN 02090.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

UDEQ. Unknown. Utah Department of Environmental Quality. Statement of Basis for UT0000051 – Kennecott Utah Copper Corporation, Magna, UT. Salt Lake City, UT. DCN 03320.

## **13.0 PESTICIDE CHEMICALS (40 CFR PART 455)**

EPA selected the Pesticide Chemicals Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-I, 70 FR 51050, August 29, 2005). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the Pesticide Chemicals Category (U.S. EPA, 2005b). EPA's 2006 annual review builds on the 2005 annual review.

### **13.1 Pesticide Chemicals Category Background**

This subsection provides background on the Pesticide Chemicals Category including a brief profile of the pesticide chemicals industry and background on 40 CFR Part 455.

#### **13.1.1 Pesticide Chemicals Industry Profile**

The pesticide chemicals industry includes facilities that manufacture pesticide active ingredients and formulate, package, and repackage pesticide products. Most of the pollutant loadings that EPA identified in the PCS and TRI databases are associated with pesticide chemicals manufacturing, not with pesticides formulating, packaging, and repackaging. As a result, most of Section 13.0 discusses pesticide chemicals manufacturing.

Approximately 100 facilities manufacture pesticide chemicals in the United States (U.S. EPA, 1993). Of these, approximately half also formulate, package, or repackage pesticides (although more than 2,000 U.S. facilities formulate, package, or repackage pesticides (U.S. EPA, 1996)). Approximately half of the pesticide chemicals manufacturers also manufacture other organic chemicals, whose discharges are covered by the Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) ELGs. Typically, a facility will manufacture only one pesticide and is the only facility in the country that manufactures it.

To estimate the pollutant loads associated with the Pesticides Chemicals Category, EPA included discharges from facilities with a primary SIC code of 2879: Pesticide and Agricultural Chemicals, Not Elsewhere Classified (NEC), as well as the discharges of pesticide chemicals from facilities with other primary SIC codes. Although facilities with many SIC codes could perform operations covered by Part 455, the main SIC code that is covered by the Pesticide Chemicals ELGs is SIC code 2879. In TRI and PCS, discharges of pesticides result from facilities with the following primary SIC codes:

- 2048: Prepared Feed and Feed Ingredients for Animals and Fowls, Except Dogs and Cats;
- 2812: Alkalies and Chlorine;
- 2816: Inorganic Pigments;
- 2821: Plastics Materials, Synthetic Resins, and Nonvulcanizable Elastomers;

- 2823: Cellulosic Manmade Fibers;
- 2824: Manmade Organic Fibers, Except Cellulose;
- 2834: Pharmaceutical Preparations;
- 2842: Specialty Cleaning, Polishing, and Sanitation Preparations;
- 2844: Perfumes, Cosmetics, and Other Toilet Preparations;
- 2865: Cyclic Organic Crudes and Intermediates, and Organic Dyes and Pigments;
- 2869: Industrial Organic Chemicals, NEC;
- 2891: Adhesives and Sealants; and
- 2899: Chemicals and Chemical Preparations, NEC.

Nonpesticide discharges from facilities in these SIC codes are regulated by other point source categories: the Inorganic Chemicals Manufacturing Category; the Pharmaceutical Manufacturing Category; and the OCPSF Category.<sup>15</sup> EPA reviews the nonpesticide discharges from these facilities with their respective point source categories.

Table 13-1 lists the SIC codes with operations in the Pesticide Chemicals Category. The majority of facilities in the Pesticide Category report a primary SIC code of 2879 in TRI and 2869 in PCS. Also, in the 1993 rulemaking, EPA identified roughly 100 pesticides manufacturers, whereas Table 13-1 includes facilities that only package, formulate, package, and repackage pesticides. Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census data by equivalent SIC code. The facilities in SIC codes that are possibly subject to the multiple ELGs (Pesticide Chemicals and others) do not correlate directly to a NAICS code, and therefore EPA could not determine the number of facilities in the 2002 U.S. Economic Census for these SIC codes.

---

<sup>15</sup> For the OCPSF Category, discharges from the manufacture of chlorine and chlorinated hydrocarbons are being reviewed as part of the chlorine and chlorinated hydrocarbons effluent guidelines rulemaking. These facilities' pesticide chemicals manufacturing discharges are still included in the Pesticide Chemicals Category.

---

**Table 13-1. Number of Facilities with Pesticide Chemicals Discharges Listed by Primary SIC Code**

| SIC Code  | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 2879: Pesticides and Agricultural Chemicals, Not Elsewhere Classified (NEC) <sup>c</sup>          | 239                       | 29                    | 124                   | 113                   |
| 2048: Prepared Feed and Feed Ingredients for Animals and Fowls, Except Dogs and Cats <sup>c</sup> | NA <sup>d</sup>           | 0                     | 1                     | 0                     |
| 2812: Alkalies and Chlorine <sup>c</sup>  |                           | 7                     | 1                     | 0                     |
| 2816: Inorganic Pigments <sup>c</sup>   |                           | 1                     | 0                     | 0                     |
| 2821: Plastics Materials, Synthetic Resins, and Nonvulcanizable Elastomers <sup>c</sup>           |                           | 58                    | 3                     | 3                     |
| 2823: Cellulosic Manmade Fibers <sup>c</sup>  |                           | 0                     | 1                     | 1                     |
| 2824: Manmade Organic Fibers, Except Cellulose <sup>c</sup>                                       |                           | 0                     | 0                     | 0                     |
| 2834: Pharmaceutical Preparations <sup>c</sup>  |                           | 0                     | 1                     | 1                     |
| 2842: Specialty Cleaning, Polishing, and Sanitation Preparations <sup>c</sup>                     |                           | 1                     | 1                     | 2                     |
| 2844: Perfumes, Cosmetics, and Other Toilet Preparations <sup>c</sup>                             |                           | 0                     | 0                     | 0                     |
| 2865: Cyclic Organic Crudes and Intermediates, and Organic Dyes and Pigments <sup>c</sup>         |                           | 24                    | 2                     | 2                     |
| 2869: Industrial Organic Chemicals, NEC <sup>c</sup>  |                           | 76                    | 12                    | 11                    |
| 2891: Adhesives and Sealants <sup>c</sup>   |                           | 0                     | 1                     | 1                     |
| 2899: Chemicals and Chemical Preparations, NEC <sup>c</sup>                                       |                           | 0                     | 6                     | 6                     |
| Chlorine and Chlorinated Hydrocarbons Rulemaking <sup>e</sup>                                     |                           | 0                     | 3                     | 2                     |
| <b>Total</b>  |                           | <b>239</b>            | <b>196</b>            | <b>156</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>Discharges of pesticides from these facilities are regulated by the Pesticide ELGs. All other dischargers are regulated under other ELGs.

<sup>d</sup>Poor bridging between NAICS and SIC codes. Number of facilities could not be determined.

<sup>e</sup>These facilities produce chlorine or chlorinated hydrocarbons as well as pesticides, and their nonpesticide discharges are being reviewed as part of the review for the Chlorine and Chlorinated Hydrocarbons effluent guidelines rulemaking.

NEC – Not elsewhere classified.

Pesticide chemicals manufacturing facilities discharge directly to surface water as well as to POTWs. Table 13-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities in SIC code 2879 reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds.

### **13.1.2 40 CFR Part 455**

The ELGs for the Pesticide Chemicals Category were first promulgated on April 25, 1978 (43 FR 17776) for Subparts A and B. EPA last revised the ELGS for the Pesticide Chemicals Category Subparts A, B, and D in 1998 (U.S. EPA, 1993; U.S. EPA, 1998), and promulgated ELGS for pesticide chemicals formulating, packaging, and repackaging (Subparts C and E) in 1996 (U.S. EPA, 1998). EPA promulgated BPT, BAT, BCT, and NSPS for Subparts A through E, and Subparts A, C, and E include PSES and PSNS limitations. This category consists of five subcategories, as shown in Table 13-3 with a description of each subcategory's applicability. All facilities that manufacture pesticide active ingredients are subject to priority pollutant limits under Subpart A. In addition, there are numerical limitations for 49 pesticide active ingredients under BPT. Under Subparts C and E, facilities that formulate, package, or repackage pesticide products are subject to either a zero discharge limit or a pollution prevention alternative that allows a small discharge after implementation of specific pollution prevention techniques and treatment.

**Table 13-2. Pesticide Chemicals Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code  | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharge |
|---|---------------------------------|-----------------------------------|--|-----------------------------|
| 2879: Pesticides and Agricultural Chemicals, Not Elsewhere Classified (NEC)                       | 18                              | 13                                | 5  | 88                          |
| 2048: Prepared Feed and Feed Ingredients for Animals and Fowls, Except Dogs and Cats <sup>a</sup> | 0                               | 1                                 | 0  | 0                           |
| 2812: Alkalies and Chlorine <sup>a</sup>  | 0                               | 0                                 | 0  | 0                           |
| 2816: Inorganic Pigments <sup>a</sup>   | 0                               | 0                                 | 0  | 0                           |
| 2821: Plastics Materials, Synthetic Resins, and Nonvulcanizable Elastomers <sup>a</sup>           | 1                               | 2                                 | 0  | 0                           |
| 2823: Cellulosic Manmade Fibers <sup>a</sup>  | 1                               | 0                                 | 0  | 0                           |
| 2824: Manmade Organic Fibers, Except Cellulose <sup>a</sup>                                       | 0                               | 0                                 | 0  | 0                           |
| 2834: Pharmaceutical Preparations <sup>a</sup>  | 0                               | 0                                 | 1  | 0                           |
| 2842: Specialty Cleaning, Polishing, and Sanitation Preparations <sup>a</sup>                     | 0                               | 1                                 | 0  | 0                           |
| 2844: Perfumes, Cosmetics, and Other Toilet Preparations <sup>a</sup>                             | 0                               | 0                                 | 0  | 0                           |
| 2865: Cyclic Organic Crudes and Intermediates, and Organic Dyes and Pigments <sup>a</sup>         | 2                               | 0                                 | 0  | 0                           |
| 2869: Industrial Organic Chemicals, NEC <sup>a</sup>  | 6                               | 6                                 | 0  | 0                           |
| 2891: Adhesives and Sealants <sup>a</sup>   | 0                               | 1                                 | 0  | 0                           |
| 2899: Chemicals and Chemical Preparations, NEC <sup>a</sup>                                       | 1                               | 4                                 | 1  | 0                           |
| Chlorine and Chlorinated Hydrocarbons Rulemaking <sup>a</sup>                                     | 2                               | 0                                 | 0  | 0                           |

Source: *TRIRelases2002\_v4*.<sup>a</sup>EPA identified facilities known to perform pesticide chemicals manufacturing operations.

**Table 13-3. Applicability of Subcategories in the Pesticide Chemicals Point Source Category**

| Sub-part | Subpart Title  | Subpart Applicability   |
|----------|--|---|
| A        | Organic Pesticide Chemicals Manufacturing                                    | Discharges resulting from the manufacture of organic and organo-tin pesticide active ingredients. Intermediates used to manufacture the active ingredients and active ingredients used solely in experimental pesticides are excluded from coverage.  |
| B        | Metallo-Organic Pesticide Chemicals Manufacturing                            | Discharges resulting from the manufacture of metallo-organic pesticide active ingredients containing mercury, cadmium, arsenic, or copper. Intermediates used to manufacture the active ingredients are excluded from coverage.   |
| C        | Pesticide Chemicals Formulating and Packaging                                | Discharges resulting from all pesticide formulating, packaging, and repackaging operations except repackaging of agricultural pesticides performed at refilling establishments. Formulation, packaging, and/or repackaging of sanitizer products (including pool chemicals), microorganisms, inorganic wastewater treatment chemicals, specified mixtures, and liquid chemical sterilant products as defined in the Federal Food, Drug and Cosmetic Act and in the Federal Insecticide, Fungicide and Rodenticide Act is excluded. Also excluded is the development of new formulations of pesticide products and the associated efficacy and field testing at on-site or stand-alone research and development laboratories where the resulting pesticide product is not produced for sale. |
| D        | Test Methods for Pesticide Pollutants  | Analytical test methods that must be used to determine the concentration of pesticide active ingredients in the wastewater.   |
| E        | Repackaging of Agricultural Pesticides Performed at Refilling Establishments | Discharges resulting from all repackaging of agricultural pesticides performed by refilling establishments whose primary business is wholesale or retail sales; and where no pesticide manufacturing, formulating, or packaging occurs. Does not apply to wastewater discharges from custom application or custom blending and repackaging of microorganisms or certain specified mixtures, or non-agricultural pesticide products.   |

Source: *Pesticide Chemicals Point Source Category - 40 CFR 455.*

## 13.2 Pesticide Chemicals Category 2005 Annual Review

This subsection discusses EPA's 2005 annual review of the Pesticides Chemicals Category including the screening-level review and category-specific review.

### 13.2.1 Pesticide Chemicals Category 2005 Screening-Level Review

Table 13-4 presents the Pesticide Chemicals Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 13-4. Pesticide Chemical Category 2005 Screening-Level Review Results**

| Rank | Point Source Category | 2002 PCS TWPE <sup>b</sup> | 2002 TRI TWPE <sup>c</sup> | Total TWPE |
|------|-----------------------|----------------------------|----------------------------|------------|
| 5    | Pesticide Chemicals   | 50,690                     | 554,485                    | 605,175    |

Source: 2005 Annual Screening-Level Analysis Report (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 13.2.2 Pesticides Chemicals Category 2005 Pollutants of Concern

Typically, a pesticide chemicals manufacturing facility manufactures only one pesticide active ingredient and is the only facility in the country producing that ingredient (U.S. EPA, 1993). As a result, in the TRI and PCS databases, the top pesticide chemicals, in terms of TWPE, are only reported by one or two facilities. Table 13-5 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. The estimated TWPE from the TRI database is much greater than the TWPE from the PCS database. Picloram contributed approximately 90 percent of the category TRI TWPE.

## 13.3 Potential New Subcategories for the Pesticide Chemicals Category

EPA did not identify any potential new subcategories for the Pesticide Chemicals Category.

**Table 13-5. 2005 Annual Review: Pesticide Chemicals Category Pollutants of Concern**

| Pollutant                                 | 2002 PCS <sup>a</sup>   |                       |               | 2002 TRI <sup>b</sup>  |                       |                |
|---|---|-----------------------|---------------|--|-----------------------|----------------|
|   | Number of Facilities Reporting Chemical                         | Total Pounds Released | TWPE          | Number of Facilities Reporting Chemical                          | Total Pounds Released | TWPE           |
| Picloram                                  | Pollutants are not in the top five PCS 2002 reported pollutants |                       |               | 2  | 240,111               | 498,021        |
| Dichlorvos                                |   |                       |               | 1  | 6.2                   | 34,935         |
| Diazinon                                  |   |                       |               | 3  | 12.3                  | 7,685          |
| Cyfluthrin                                |   |                       |               | 1  | 26.0                  | 5,463          |
| Merphos                                   |   |                       |               | 1  | 23.0                  | 1,549          |
| Carbaryl                                  | 1   | 153                   | 42,918        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                |
| Diazinon                                  | 1   | 2.1                   | 1,344         |  |                       |                |
| Hyxachlorocyclohexane                     | 1   | 14.8                  | 1,038         |  |                       |                |
| Chlorine                                  | 3   | 1,608                 | 819           |  |                       |                |
| 1,3-Dichloropropene                       | 76  | 1,097                 | 620           |  |                       |                |
| <b>Pesticide Chemicals Category Total</b> | <b>203<sup>c</sup></b>  | <b>122,209,015</b>    | <b>50,690</b> | <b>64<sup>c</sup></b>  | <b>1,754,350</b>      | <b>554,485</b> |

Source: PCSLoads2002\_v2; TRIReleases2002\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

## 13.4 Pesticide Chemicals Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Pesticide Chemicals Category. EPA's 2006 annual review of the Pesticide Chemicals Category included reviewing the 2003 TRI data and verifying facility discharges.

### 13.4.1 Pesticide Chemicals Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings based on methodology changes as described in Section 4.2. Table 13-6 shows the 2006 screening-level TWPE estimated for the Pesticide Chemicals Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 13-6. Pesticide Chemicals Category 2006 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Pesticide Chemicals   | 50,299                     | 554,673                    | 485,460                    |

Source: *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 13.4.2 Pesticide Chemicals Category 2006 Pollutants of Concern

Table 13-7 presents the pollutants of concern for the Pesticide Chemicals Category based on the 2006 annual review. In all cases, the top pollutant is reported by only one or two facilities, which is typical for the industry (U.S. EPA, 1993). The remainder of this subsection discusses the discharges reported for picloram, the top TRI 2002 and 2003 pollutant of concern in terms of TWPE, and carbaryl, the top PCS 2002 pollutant of concern in terms of TWPE.

Table 13-7. 2006 Annual Review: Pesticide Chemicals Category Pollutants of Concern

| Pollutant  | 2002 PCS <sup>a</sup>  |                       |               | 2002 TRI <sup>b</sup>  |                       |         | 2003 TRI <sup>b</sup>                    |                       |         |
|--|--|-----------------------|---------------|--|-----------------------|---------|--|-----------------------|---------|
|  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE    | Number of Facilities Reporting Pollutant | Total Pounds Released | TWPE    |
| Picloram   | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |               | 2  | 240,111               | 498,021 | 1  | 213,664               | 443,167 |
| Dichlorvos   |  |                       |               | 1  | 6.24                  | 34,935  | 1  | 1.24                  | 6,929   |
| Diazinon   | 1  | 2.16                  | 1,344         | 3  | 12.4                  | 7,685   | 3  | 8.35                  | 5,196   |
| Cyfluthrin   | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |               | 1  | 26                    | 5,463   | 1  | 26                    | 5,463   |
| Merphos  |  |                       |               | 1  | 23                    | 1,549   | 1  | 10                    | 674     |
| Carbaryl, Total  | 1  | 153                   | 42,918        | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |         |  |                       |         |
| Hexachlorocyclohexane, Total                             | 1  | 14.8                  | 1,038         |  |                       |         |  |                       |         |
| Chlorine   | 3  | 1,608                 | 819           |  |                       |         |  |                       |         |
| Daconil (C <sub>8</sub> Cl <sub>4</sub> N <sub>2</sub> ) | 1  | 83                    | 613           |  |                       |         |  |                       |         |
| <b>Pesticide Chemicals Category Total</b>                | <b>48<sup>c</sup></b>  | <b>122,206,792</b>    | <b>50,299</b> |  |                       |         |  |                       |         |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

### 13.4.3 Pesticide Chemicals Category Picloram Discharges

Picloram accounts for approximately 90 percent of the category's 2002 TRI TWPE and approximately 91 percent of the category's 2003 TRI TWPE. Table 13-8 presents the facilities reporting discharges of picloram to TRI in 2002 and 2003.

**Table 13-8. Pesticide Chemicals Category Picloram Discharges**

| Facility<br>(Location)                               | 2002 TRI                           |         | 2003 TRI                           |         |
|--|------------------------------------|---------|------------------------------------|---------|
|  | Total Pounds Released <sup>a</sup> | TWPE    | Total Pounds Released <sup>a</sup> | TWPE    |
| Dow Chemical Co. Freeport Facility<br>(Freeport, TX) | 239,991                            | 497,772 | 213,664                            | 443,167 |
| Dow Chemical Co. Midland Ops.<br>(Midland, MI)       | 120                                | 249     | NA                                 | NA      |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Facilities are direct dischargers so discharges are not transferred to POTWs.

NA – Not applicable. Facility did not report discharges of picloram to TRI in 2003.

The majority of the picloram TWPE in the TRI 2002 and 2003 databases are from discharges reported by Dow Chemical Co. Freeport Facility. The facility's NPDES permit does not have limits for picloram discharges, and PCS does not have data on the facility's picloram discharges (TCEQ, 2002; TCEQ, 2003).

EPA contacted Dow Chemical Co. Freeport Facility to determine how it estimated its TRI wastewater discharges of picloram and if picloram discharges were being controlled by the best available technology economically achievable. In letters dated October 26, 2005, and July 26, 2006, Dow Chemical Co. stated that its Freeport facility manufactures picloram as one of its many products (Falcon, 2005). The facility recovers picloram for sale, but some picloram remains in the wastewater because of solubility and filtration inefficiency. Dow's Freeport Facility measures the total organic carbon (TOC) in the wastewater daily, and estimates the wastewater picloram content as a percentage of the TOC based on process knowledge, water chemistry, and the downstream wastewater treatment removal. EPA continues to work with the facility to determine if picloram is being controlled by the best available technology economically achievable.

EPA reviewed Dow Chemical Co. Freeport Facility's NPDES permit, but could not determine which outfall receives the picloram wastewater (TCEQ, 2002; TCEQ, 2003). As a result, EPA could not estimate the concentration of picloram in the facility's wastewater for a specific outfall. However, Table 13-9 uses flow data from the entire facility to estimate the concentration of picloram in the effluent wastewater. EPA considers the estimate in Table 13-9 as a lower bound of the concentration in wastewater from the picloram manufacturing process, because EPA used an estimated flow that includes wastewater from most of Dow's Freeport facility's organic chemicals manufacturing processes, off-site wastewater, stormwater, noncontact cooling water, ground water, and other nonprocess wastewater.

**Table 13-9. Estimated Picloram Concentrations in Dow Chemical Co. Freeport Facility's Final Effluent**

| Year | Total Facility Flow (MGY) | Outfall Flows Included for Total Flow <sup>a</sup> | Pounds of Picloram Reported (lbs/yr) | Estimated Picloram Concentration (mg/L) |
|------|---------------------------|--|--------------------------------------|---|
| 2002 | 108,000                   | 001  | 239,991                              | 266                                     |
| 2003 | 117,000                   |  | 213,664                              | 218                                     |

<sup>a</sup>Picloram-containing wastewater most likely discharges through Outfall 001. Outfall 001 receives wastewater from most of Dow Freeport's organic chemicals manufacturing, as well as off-site wastewater, stormwater, ground water, and noncontact cooling water. Outfall 002 receives wastewater from inorganic chemicals manufacturing, as well as utility wastewater, cooling water, treated ground water, and process stormwater. Outfall 003 receives wastewater from organic chemicals manufacturing such as polycarbonate, styrene, allyl chloride, and epichlorohydrin wastewater, as well as off-site wastewater, stormwater, noncontact cooling water, boiler blowdown, and utility wastewater.

Activated carbon is the most effective treatment technology based on the treatability transfer analysis done for the 1993 rulemaking. In 1997, EPA set a drinking water Maximum Contaminant Level Goal at 0.5 mg/L for picloram. Picloram is soluble in water at 430 mg/L, at 25° C (Cornell, 2006).

#### 13.4.4 Pesticide Chemicals Category Total Carbaryl Discharges

Total carbaryl accounts for approximately 85 percent of the category's 2002 PCS TWPE. Table 13-10 presents the facilities reporting discharges of picloram to PCS in 2002.

**Table 13-10. Pesticide Chemicals Category Total Carbaryl Discharges in PCS 2002**

| Facility (Location)                         | Total Pounds Released | TWPE   |
|---|-----------------------|--------|
| Bayer Cropscience Institute (Institute, WV) | 153                   | 42,918 |

Source: *PCSLoads2002\_v2*.

EPA verified Bayer Cropscience Institute's carbaryl discharges by reviewing the facility's permit and detailed PCS data and contacting the WV Department of Environmental Protection to verify the facility's carbaryl loads (WVDEP, 2002). The total carbaryl discharges from the facility are incorrectly estimated by *PCSLoads2002\_v4*. Based on DMR data, the facility discharged approximately 5.5 pounds (1,500 TWPE) of total carbaryl in 2002, whereas the *PCSLoads2002\_v4* database estimates 153 pounds (42,900 TWPE) because of double-counting outfalls and data-entry errors. EPA will correct the estimated pollutant load for total carbaryl in future review cycles.

### 13.5 Pesticide Chemicals Category Conclusions

- The Pesticide Chemicals Category was selected for detailed review because of high TWPE in the *PCSLoads2002\_v4*, *TRIReleases2002\_v4*, and *TRIReleases2003\_v2* databases.
- Discharges of picloram from Dow Chemical’s Freeport, TX facility account for 99 percent of the category load from the TRI databases. The facility estimates its picloram discharges as a percentage of TOC in the wastewater. EPA estimated the concentration of picloram discharged in final effluent at more than 200 mg/L. Activated carbon is the most effective treatment technology based on the treatability transfer analysis done for the 1993 rulemaking (40 CFR 455, Table 10). EPA continues to work with the facility to better understand the treatment and discharge of picloram.
- EPA identified an error in the estimation of total carbaryl loads from Bayer Cropscience Institute in *PCSLoads2002\_v4*. Based on DMR data, the facility discharged approximately 5.5 lbs (1,500 TWPE) of total carbaryl in 2002. Because of data-entry errors and double-counting of outfalls, *PCSLoads2002\_v4* estimated approximately 153 lbs (42,900 TWPE) of total carbaryl discharged. EPA will correct the estimated pollutant load for total carbaryl in future review cycles, and it is no longer a pollutant of concern (at less than 3 percent of the category PCS TWPE).

### 13.6 Pesticide Chemicals Category References

Cornell. 2006. Cornell University Herbicide Profile 10/88. Available online at: <http://extoxnet.orst.edu/pips/picloram.htm>. Date accessed: June 12, 2006. DCN 03979.

Falcon, Fran Quinlan. 2005. Letter from Fran Quinlan Falcon, Environmentally Leveraged Delivery Leader, The Dow Chemical Company, and Audrey Kasenge, Eastern Research Group, Inc. “EPA Effluent Guideline Review on TRI Chemical Picloram in Response to EPA’s e-mail requests dated June 9, 2005 and October 20, 2005.” (October 26). DCN 02670.

TCEQ. 2002. Permit to Discharge Wastes Under Provisions of Section 402 of the Clean Water Act and Chapter 26 of the Texas Water Code Fact Sheet and Executive Director’s Preliminary Decision NPDES TX00064831 – The Dow Chemical Company, Freeport, TX. Austin, TX. (November 1). DCN 01897.

TCEQ. 2003. Permit to Discharge Wastes Under Provisions of Section 402 of the Clean Water Act and Chapter 26 of the Texas Water Code NPDES TX00064831 – The Dow Chemical Company, Freeport, TX. Austin, TX. (December 19). DCN 01894.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1993. *Development Document for Effluent Limitations Guidelines, Pretreatment Standards, and New Source Performance Standards for the Pesticide Chemicals Manufacturing Point Source Category (Final)*. EPA-821-R-93-016. Washington, DC. (September).

U.S. EPA. 1996. *Development Document for Best Available Technology, Pretreatment Technology, and New Source Performance Technology for the Pesticide Formulating, Packaging, and Repackaging Industry – Final*. EPA-821-R-96-019. Washington, DC. (September).

U.S. EPA. 1998. Amendments to the Effluent Limitations Guidelines, Pretreatment Standards, and New Source Performance Standards for the Organic Pesticide Chemicals Manufacturing Industry—Pesticide Chemicals Point Source Category; Direct Final Rule and Proposed Rule (see 63 FR 3944, July 22, 1998). Available online at: [www.epa.gov/EPA-WATER/1998/July/Day-22/w19514.pdf](http://www.epa.gov/EPA-WATER/1998/July/Day-22/w19514.pdf). Date accessed: July 1, 2005.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

WVDEP. 2002. West Virginia Department of Environmental Protection, Division of Water Resources. National Pollution Discharge Elimination System Water Pollution Control Permit NPDES WV0000086 – Bayer Cropscience Institute, Charleston, WV. Charleston, WV. (June). DCN 02894.

## **14.0            PETROLEUM REFINING (40 CFR PART 419)**

EPA selected the Petroleum Refining Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA’s previous detailed study of this industry (U.S. EPA, 2004). This section summarizes the 2005 annual review and also describes EPA’s 2006 annual review of the discharges associated with the Petroleum Refining Category. EPA’s 2006 annual review builds on the 2005 annual review. Because EPA completed a detailed study of this industry in 2004, most of the 2006 annual review focused on newly identified pollutant discharges (i.e., discharges not reported by a facility in the data used for the 2004 detailed study).

### **14.1            Petroleum Refining Category Background**

This subsection provides background on the Petroleum Refining Category including a brief profile of the petroleum refining industry and background on 40 CFR Part 419.

#### **14.1.1        Petroleum Refining Industry Profile**

The petroleum refining industry includes facilities that produce gasoline, kerosene, distillate fuel oils, residual fuel oils, and lubricants through fractionation or straight distillation of crude oil, redistillation of unfinished petroleum derivatives, cracking, or other processes. This industry is represented by one SIC code, 2911 Petroleum Refining; however, EPA is considering including operations from four other SIC codes as new subcategories of the Petroleum Refining Category (see the Potential New Subcategories Section (Section 14.3)).

Table 14-1 presents the number of facilities in the SIC codes that compose the petroleum refining industry. Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census by the equivalent SIC code. The facilities in SIC code 5171 do not correlate directly to a NAICS code and therefore EPA could not determine the number of facilities in the 2002 U.S. Economic Census for SIC code 5171.

Petroleum refineries discharge directly to surface water as well as to POTWs. Table 14-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of petroleum refineries reporting to TRI reported discharging directly. The majority of facilities reporting to TRI in SIC codes classified as potential new subcategories reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting threshold.

**Table 14-1. Number of Facilities in Petroleum Refining SIC Codes**

| SIC   | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 2911: Petroleum Refining                    | 199                       | 153                   | 163                   | 163                   |
| <b>Potential New Subcategories</b>          |                           |                       |                       |                       |
| 2992: Lubricating Oils and Greases          | 407                       | 21                    | 144                   | 139                   |
| 2999: Products Of Petroleum and Coal, NEC   | 74                        | 17                    | 22                    | 28                    |
| 4612: Crude Petroleum Pipelines             | 271                       | 23                    | 0                     | 0                     |
| 5171: Petroleum Bulk Stations and Terminals | NA <sup>c</sup>           | 446                   | 599                   | 541                   |
| <b>Potential New Subcategories Total</b>    | <b>&gt;752</b>            | <b>507</b>            | <b>765</b>            | <b>708</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>Poor bridging between SIC codes and NAICS codes. Number of facilities could not be determined.

NA – Not applicable.

NEC – Not elsewhere classified.

**Table 14-2. Petroleum Refining Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code                                    | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 2911: Petroleum Refining                    | 95                              | 19                                | 15   | 34                           |
| <b>Potential New Subcategories</b>          |                                 |                                   |  |                              |
| 2992: Lubricating Oils and Greases          | 10                              | 20                                | 4  | 110                          |
| 2999: Products Of Petroleum and Coal, NEC   | 6                               | 0                                 | 0  | 16                           |
| 4612: Crude Petroleum Pipelines             | 0                               | 0                                 | 0  | 0                            |
| 5171: Petroleum Bulk Stations and Terminals | 139                             | 27                                | 17   | 416                          |
| <b>Potential New Subcategories Total</b>    | <b>250</b>                      | <b>66</b>                         | <b>36</b>                                    | <b>576</b>                   |

Source: *TRIRelases2002\_v4*.

### 14.1.2 40 CFR Part 419

EPA first promulgated ELGs for the Petroleum Refining Category (40 CFR Part 419) on October 18, 1982 (47 FR 46446). There are five subcategories that all have BPT, BAT, BCT, PSES, NSPS, and PSNS. EPA established numerical limitations for ammonia as nitrogen, hexavalent chromium, phenolic compounds, sulfide, and total chromium in at least one subcategory. Section 7 of the 2004 TSD provides more information on the existing regulations for the Petroleum Refining Category (U.S. EPA, 2004).

## 14.2 Petroleum Refining Category 2005 Annual Review

This subsection discusses EPA's 2005 annual review of the Petroleum Refining Category including the screening-level review and category-specific review.

### 14.2.1 Petroleum Refining Category 2005 Screening Level Review

Table 14-3 presents the Petroleum Refining Category TWPE calculated, using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*. The discharges in Table 14-3 include loads from facilities in SIC codes EPA determined are potential new subcategories.

**Table 14-3. Petroleum Refining Category 2005 Screening-Level Review Results**

| Rank | Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|------|-----------------------|----------------------------|----------------------------|------------|
| 4    | Petroleum Refining    | 166,045                    | 503,802                    | 669,847    |

Source: 2005 Annual Screening-Level Analysis (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 14.2.2 Petroleum Refining Category 2005 Pollutants of Concern

Table 14-4 shows the pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*.

Discharges of dioxin and dioxin-like compounds and PACs contributed approximately 76 percent of the TWPE in *TRIRelases2002\_v2*. Discharges of metals account for approximately nine percent of the total TWPE in *TRIRelases2002\_v2*. From *PCSLoads2002\_v2*, sulfide accounts for approximately 50 percent of the TWPE.

**Table 14-4. 2005 Annual Review: Petroleum Refining Category Pollutants of Concern**

| Pollutant                                | 2002 TRI <sup>a</sup>  |                       |                | 2002 PCS <sup>b</sup>  |                       |                |
|--|--|-----------------------|----------------|--|-----------------------|----------------|
|  | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           |
| Dioxin and Dioxin-Like Compounds         | 17   | 0.011<br>(5.16 grams) | 295,598        | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                |
| PACs                                     | 61   | 3,309                 | 88,473         |  |                       |                |
| Sodium Nitrite                           | 3  | 121,788               | 45,468         |  |                       |                |
| Mercury and Mercury Compounds            | 68   | 124                   | 14,465         |  |                       |                |
| Lead and Lead Compounds                  | 97   | 5,644                 | 12,643         |  |                       |                |
| Sulfide                                  | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | 77   | 29,851                | 83,626         |
| Chlorine                                 |  |                       |                | 17   | 45,011                | 22,918         |
| Fluoride                                 |  |                       |                | 12   | 406,609               | 14,231         |
| Silver                                   |  |                       |                | 7  | 769                   | 12,669         |
| Selenium                                 |  |                       |                | 17   | 7,560                 | 8,477          |
| <b>Petroleum Refining Category Total</b> | <b>352</b>   | <b>18,512,185</b>     | <b>503,802</b> | <b>107</b>   | <b>7,606,182,343</b>  | <b>166,045</b> |

Source: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>b</sup>Discharges include only major dischargers.

### 14.3 Potential New Subcategories for the Petroleum Refining Category

EPA reviewed industries with SIC codes not clearly subject to existing ELGs. EPA concluded the processes, operations, wastewaters, and pollutants of facilities in the SIC codes listed in Table 14-5 are similar to those of the Petroleum Refining Category. See the *Preliminary 2005 Review of Prioritized Categories of Industrial Discharges* (U.S. EPA, 2005b). Table 14-5 shows the combined TWPE from *TRIRelases2002\_v2* and *PCSLoads2002\_v2* for each SIC code that is a potential new subcategory. The discharges for the potential new subcategory SIC codes are a negligible percentage of the total 2002 TWPE for the Petroleum Refining Category. Consistent with the conclusions drawn during the 2004 detailed study (U.S. EPA, 2004), EPA found that large numbers of these facilities discharge no wastewater and only a small number of facilities discharge significant TWPE.

**Table 14-5. Petroleum Refining Category Potential New Subcategories Pollutant TWPE**

| SIC Code | SIC Description                     | Total 2002 TWPE | Percentage of Total Petroleum Refining Category TWPE |
|----------|-------------------------------------|-----------------|--|
| 2992     | Lubricating Oils and Greases        | 3,836           | 0.57%  |
| 2999     | Products of Petroleum & Coal, NEC   | 1,915           | 0.29%  |
| 4612     | Crude Petroleum Pipelines           | 247             | 0.04%  |
| 5171     | Petroleum Bulk Stations & Terminals | 1,551           | 0.23%  |

Source: *TRIReleases2002\_v2*; *PCSLoads2002\_v2*.

#### 14.4 Petroleum Refining 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Petroleum Refining Category. EPA obtained additional data and identified changes in estimates of TWPE for sodium nitrite and PACs.

##### 14.4.1 Petroleum Refining Category TWF and POTW Percent Removal Revisions

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EPA revised the TWF and POTW removal values it used for sodium nitrite in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EPA applies to sodium nitrite is now 0.0032 (formerly 0.373), and the POTW removal is now 90 percent (formerly 1.87 percent). As discussed in Section 4.2.3, during its 2006 annual review of the Petroleum Refining Category, EPA also revised the TWFs for two individual PACs and developed TWFs for two additional PACs. These TWF revisions resulted in a change to the petroleum refining-specific TWF for PACs to 26.3 (formerly 25.4). The calculation of the petroleum refining PACs TWF is discussed in Section 4.3.1. Table 14-6 presents the loads before and after corrections to the sodium nitrite TWF and POTW percent removal and petroleum refining-specific PACs TWF for the Petroleum Refining Category. Based on the revised TWPE, sodium nitrite is no longer a pollutant of concern for the Petroleum Refining Category.

**Table 14-6. Impact of Changes to TWF and POTW Percent Removal for the Petroleum Refining Category**

| Database | Pollutant      | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|----------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite | 3   | 45,468                | 74                    |
| TRI 2002 | PACs           | 61  | 88,473                | 85,642                |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*.

#### 14.4.2 Petroleum Refining Category 2006 Screening-Level Review

As a result of its 2006 screening-level review, EPA revised the TRI and PCS rankings as described in Section 4.2, based on methodology changes described in Section 4.2 and changes made based on contacts with facilities. For the Petroleum Refining Category, the most significant changes are also described in Section 14.4.1. Table 14-7 shows the 2006 screening-level TWPE estimated for the Petroleum Refining Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 14-7. Petroleum Refining Category 2006 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Petroleum Refining    | 165,076                    | 467,009                    | 498,367                    |

Source: *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v4*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

#### 14.4.3 Petroleum Refining Category 2006 Pollutants of Concern

Table 14-8 presents the pollutants of concern for the Petroleum Refining Category identified as part of the 2006 annual review.

Dioxin and dioxin-like compounds contribute approximately 63 percent of the Petroleum Refining Category TWPE in *TRIRelases2002\_v4*, and approximately 75 percent of the Petroleum Refining Category TWPE in *TRIRelases2003\_v2*. PACs discharges contribute approximately 18 percent of the Petroleum Refining Category TWPE in *TRIRelases2002\_v4* and approximately 7 percent of the TWPE in *TRIRelases2003\_v2*. The 2006 annual review of the PCS data shows the same results as the 2005 annual review.

#### 14.5 Petroleum Refining Category Update on Pollutants of Concern

EPA completed a detailed study of the Petroleum Refining Category for the 2004 annual review (U.S. EPA, 2004). This subsection summarizes the results of the detailed study pollutants of concern and the discharges of these pollutants in the *PCSLoads2002\_v4*, *TRIRelases2002\_v4*, and *TRIRelases2003\_v2* databases.

Table 14-8. 2006 Annual Review: Petroleum Refining Category Pollutants of Concern

| Chemical                                      | PCS 2002 <sup>a</sup>   |                      |                | TRI 2002 <sup>b</sup>   |                   |                | TRI 2003 <sup>b</sup>   |                   |                |
|---|---|----------------------|----------------|---|-------------------|----------------|---|-------------------|----------------|
|   | Number of Facilities Reporting Chemical                         | Total Pounds         | TWPE           | Number of Facilities Reporting Chemical                         | Total Pounds      | TWPE           | Number of Facilities Reporting Chemical                         | Total Pounds      | TWPE           |
| Sulfide                                       | 77  | 29,851               | 83,626         | Pollutants are not in the top five TRI 2002 reported pollutants |                   |                | Pollutants are not in the top five TRI 2003 reported pollutants |                   |                |
| Chlorine                                      | 17  | 45,011               | 22,918         |   |                   |                |   |                   |                |
| Fluoride                                      | 12  | 406,609              | 14,231         |   |                   |                |   |                   |                |
| Silver  | 7   | 769                  | 12,669         |   |                   |                |   |                   |                |
| Selenium                                      | 17  | 7,560                | 8,477          |   |                   |                |   |                   |                |
| Dioxin and Dioxin-Like Compounds <sup>c</sup> | Pollutants are not in the top five PCS 2002 reported pollutants |                      |                | 16  | 0.0114            | 296,024        | 18  | 0.0123            | 374,030        |
| PACs  |   |                      |                | 61  | 3,309             | 85,642         | 59  | 1,291             | 32,825         |
| Mercury and Mercury Compounds                 |   |                      |                | 68  | 124               | 14,465         | 66  | 110               | 12,912         |
| Lead and Lead Compounds                       |   |                      |                | 97  | 5,644             | 12,643         | 116   | 9,882             | 22,136         |
| Nitrate Compounds                             |   |                      |                | 62  | 16,796,417        | 12,541         | 61  | 15,706,670        | 11,728         |
| <b>Petroleum Refining Category Total</b>      | <b>118<sup>d</sup></b>  | <b>7,606,670,158</b> | <b>165,076</b> | <b>352<sup>d</sup></b>  | <b>18,412,828</b> | <b>467,009</b> | <b>343<sup>d</sup></b>  | <b>17,314,282</b> | <b>498,367</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>The TWPE for dioxin and dioxin-like compounds for the 2006 annual review changed by less than 0.15 percent from the 2005 annual review due to an additional dioxin distribution in the SIC code average dioxin distribution. There were no changes made to the reported dioxin and dioxin-like compound discharge pounds or the individual TWFs for dioxin and dioxin-like compounds.

<sup>d</sup>Number of facilities reporting TWPE greater than zero.

### 14.5.1 Petroleum Refining Category Dioxin and Dioxin-Like Compound Discharges

During its 2004 detailed study of the petroleum refining industry, EPA found the following regarding dioxin and dioxin-like compound dischargers:

- Dioxin and dioxin-like compound discharges reported by 15 of 17 petroleum refining facilities to TRI in 2000 were either not based on measured concentrations or were estimated using one-half the analytical detection limit when dioxin and dioxin-like compounds were not detected.
- Catalytic reformer regeneration wastewater is the major source of dioxin and dioxin-like compounds in petroleum refining wastewaters.
- Based on available analytical data, high concentrations of dioxin and dioxin-like compounds, including TCDD and TCDF, may be detected in catalytic reformer regeneration wastewater.
- Based on available analytical data, oil/water separators effectively remove dioxin and dioxin-like compounds from petroleum refining wastewaters prior to discharge. Because dioxin and dioxin-like compounds have a low water solubility and extreme hydrophobicity, the dioxin and dioxin-like compounds from catalytic regeneration wastewaters most likely partition to the oily and solid phases in the API separator.

EPA reviewed more recent-TRI reported discharges of dioxin and dioxin-like compounds by petroleum refineries to see if there were any new data to supplement its earlier analyses. As was the case with the 2004 detailed study, EPA found that most petroleum refineries do not monitor for dioxin and dioxin-like compounds. Only 17 refineries reported dioxin and dioxin-like compounds discharges in *TRIRelases2002\_v4*. Of these, 15 refineries also reported dioxin and dioxin-like compounds discharges in *TRIRelases2000\_v4* and 14 reported such discharges in *TRIRelases2003\_v2*. Table 14-11, at the end of this section, lists the petroleum refineries reporting dioxin and dioxin-like compound discharges in *TRIRelases2000\_v4*, *TRIRelases2002\_v4*, and *TRIRelases2003\_v2*, their reported discharges, the basis of estimate for the discharge, whether the facility detected dioxin and dioxin-like compounds in its wastewater, and any additional information collected.

The majority of the reported dioxin and dioxin-like compound discharge loads are estimated as flow multiplied by one-half of the detection limit or using industry-derived emission factors. Only 3 of the 17 dioxin and dioxin-like compound discharges reported for 2002 are based on analytical data with measurements above the sample detection limit. EPA also identified two petroleum refineries that reported dioxin and dioxin-like compound discharges based on analytical measurements to TRI in 2003, but did not report dioxin and dioxin-like compound discharges to TRI in 2000 or 2002. EPA contacted these refineries to determine how they estimated their dioxin and dioxin-like compound discharges. Table 14-9 summarizes the information EPA collected from these five petroleum refineries.

**Table 14-9. Petroleum Refineries that Based Dioxin and Dioxin-Like Compound Discharges on Analytical Measurement Data**

| Facility               | Location       | 2006 Review TWPE | Review              | Findings  |
|------------------------|----------------|------------------|---------------------|---|
| BP Toledo              | Oregon, OH     | 54,100           | 2004 Detailed Study | Facility sampled its effluent once in September 2000. The facility detected nine dioxin congeners, including the most toxic form, 2,3,7,8-TCDD; however, no dioxin and dioxin-like compounds were detected above the Method 1613B minimum level (Nelson, 2004).   |
| Tesoro Northwest       | Anacortes, WA  | 47,000           | 2004 Detailed Study | Facility measured its effluent four times between 2000 and 2001, and each sample was analyzed by two independent analytical laboratories. The facility detected between 6 and 14 dioxin congeners in its final effluent, several of which were detected below the Method 1613B minimum level. The most toxic congener, 2,3,7,8-TCDD, was detected by one laboratory for one of the samples (Spurling, 2005).  |
| Conoco Phillips        | Wilmington, CA | 9,020            | 2005 Annual Review  | Facility measured discharges from the catalytic reformer regeneration unit in 1992 and detected all 17 dioxin congeners. The facility sends the catalytic reformer regeneration waste through a wastewater treatment plant and the treated wastewater discharges to a POTW (Hamann, 2005).  |
| Shell Chemical Company | Deer Park, TX  | 14,600           | 2006 Annual Review  | Facility has not independently analyzed its wastewaters for dioxin and dioxin-like compounds; however, in 2003 the Texas Commission on Environmental Quality (TCEQ), as part of a total maximum daily load program along the Houston Ship Channel, collected and measured the facility's refinery effluent. The TCEQ analyzed the dioxin and dioxin-like compounds in the particle-bound fraction and the dissolved fraction of the refinery effluent. The TCEQ detected six dioxin and dioxin-like compounds in the particle-bound fraction and 16 dioxin and dioxin-like compounds in the dissolved fraction, but none were detected above the Method 1613B minimum level. The most toxic congener, 2,3,7,8-TCDD, was not detected in either fraction (Brzuzy, 2006). |
| Tesoro Alaska          | Kenai, AK      | 46               | 2006 Annual Review  | Facility measured discharges in 2001 and 2003 from its catalytic reformer regeneration unit after the wastewater passed through a granulated activated carbon filter, but before the API separators and other wastewater treatment. In 2001, the facility detected 13 dioxin and dioxin-like compounds above the Method 1613B minimum level. The facility sampled the wastewater again in 2003, and did not detect any of the dioxin and dioxin-like compounds above the Method 1613B minimum level (Rosin, 2006).  |

Two of the facilities identified in Table 14-9, were analyzed and discussed in the 2004 detailed study. For a complete discussion of EPA's review and conclusions for the BP Toledo and the Tesoro Northwest facilities, see the 2004 Technical Support Document (U.S. EPA, 2004). The new information obtained from the other three petroleum refineries supports the conclusions drawn during the 2004 detailed study. Two of the three facilities based their final effluent dioxin discharges on analytical data collected of catalytic reformer regeneration wastewater prior to on-site treatment. The third facility did not detect any dioxin congeners above the method 1613B minimum level.

#### **14.5.2 Petroleum Refining Category Polycyclic Aromatic Compounds (PACs) Discharges**

During its 2004 detailed study of the Petroleum Refining Category, EPA found the following regarding PACs discharges:

- Discharges of PACs reported by 18 of 19 petroleum refineries to TRI in 2000 were either not based on measured concentrations in refinery effluent or were estimated using one-half the analytical detection limit when individual PACs were not detected.
- There is no obvious source of PACs releases to refinery wastewaters, other than potential leaks and spills of crude oil and petroleum products.
- Based on available analytical data, there is little evidence that PACs are present in concentrations above the detection limit in petroleum refinery wastewater discharges.

EPA reviewed more recent TRI-reported discharges of PACs by petroleum refineries to see if there were any new data to supplement its earlier analyses. As was the case with the 2004 detailed study, EPA found that most petroleum refineries do not monitor for individual PACs. Thirty-nine refineries reported PACs discharges in *TRIRelases2002\_v4* or *TRIRelases 2003v2*. Of these, 19 refineries reported PACs discharges in *TRIRelases2000\_v4*, and 34 reported such discharges in *TRIRelases2003\_v2*. Table 14-12, at the end of this section, lists the petroleum refineries reporting PACs discharges in *TRIRelases2000\_v4*, *TRIRelases2002\_v4*, or *TRIRelases2003\_v2*, the reported discharges, the basis of estimate for the discharge, and any additional information collected.

The majority of the reported PACs discharge loads are estimated as flow multiplied by one-half the detection limit, or using industry-derived emission factors. During the 2004 detailed study, EPA verified that only one facility measured PACs in its refinery effluent above the method detection level. In the 2005 annual review, EPA verified an additional facility measured PACs in its refinery effluent above the method detection level. In this 2006 annual review, EPA verified one additional refinery measured PACs in their effluent above the method detection level. Therefore, EPA verified that 3 of the 39 PACs discharges reported for 2002 or 2003 are based on analytical data with measurements above the method detection limit. Table 14-10 summarizes the information that EPA has collected from these three facilities.

**Table 14-10. Petroleum Refineries that have Detected PACs in Refinery Effluent**

| Facility               | Location          | 2006 Review TWPE | Review              | Findings  |
|------------------------|-------------------|------------------|---------------------|---|
| Lyondell Citgo         | Houston, TX       | 3,930            | 2004 Detailed Study | Facility measured five individual PACs above the method detection limits in its discharge to the Washburn Tunnel Facility (part of Gulf Coast Waste Disposal Authority); however, PACs were not detected in the Washburn Tunnel Facility's discharge to surface water (U.S. EPA, 2004). Gulf Coast is an industrial POTW designed to treat industrial discharges without on-site pretreatment.  |
| Marathon Ashland       | Detroit, MI       | 172              | 2005 Annual Review  | Facility measured five individual PACs above the method detection limits in its discharge to the Detroit Wastewater Treatment Plant (Sheard, 2005). EPA was unable to determine if the Detroit Wastewater Treatment Plant measured PACs in its discharge to surface water.  |
| Premcor Refining Group | Delaware City, DE | 81               | 2006 Annual Review  | Facility routinely measured its wastewater treatment plant effluent for PACs from 1999 through 2003. During 2002 and 2003, the facility detected eight individual PACs above the method detection limits; however, not all of the eight PACs were detected during each sampling event. The facility's wastewater treatment plant consists of Coalescing Plate Interceptor (CPI) and API separators, spill diversion tanks, equalization tanks, dissolved nitrogen floatation tanks, two-stage aeration tanks, biotreatment tanks, clarifier tanks, sand filtration, guard basin, and a final API separator prior to discharge (Chelpaty, 2006). |

The information collected during this 2006 review supports the conclusions drawn during the 2004 detailed study. EPA determined that most of the PACs discharges reported to TRI are not based on analytical data. EPA did verify that three facilities have detected PACs in their refinery effluent; however, this is out of the 163 petroleum refineries that report to TRI. Of these three facilities, two discharge indirectly to POTWs and receive additional treatment prior to discharge to surface waters. PAC discharges from the third facility represent 81 TWPE. At this time, EPA has not identified a source of PACs other than potential leaks and spills of crude oil or petroleum products.

### 14.5.3 Petroleum Refining Category Metals Discharges

During its 2004 detailed study of the Petroleum Refining Category, EPA found the following regarding metals discharges:

- Metals that may be present in petroleum refining wastewater include aluminum, arsenic, chromium, copper, lead, mercury, nickel, selenium, vanadium, and zinc.
- Crude petroleum is the primary source of metals in refinery wastewater. The concentration of a metal in crude depends on the source of the crude.

- The concentration of metal pollutants in refinery wastewaters is at or near treatable level, leaving little to no opportunity to reduce metals discharges through conventional end-of-pipe treatment.

For petroleum refineries, the metals TWPE in *TRIRelases2003\_v2* increased by 38 percent compared to discharges in *TRIRelases2002\_v4*. The three metal pollutants with the largest TWPE increases are lead, copper, and cadmium, as discussed below:

- **Cadmium.** Increase of 5000 percent attributed to a single facility, Sinclair Oil Tulsa Refinery, Tulsa, OK, which reports cadmium discharges as a range. The range increased from 1 – 10 lbs to 11 – 500 lbs. For database purposes, the discharge increased from 5 to 250 pounds (the median values of the ranges).
- **Lead.** Increase is attributed to a single facility, Chalmette Refining LLC, Chalmette, LA, which increased its reported lead discharge from 16 to 4,992 pounds. EPA is in the process of contacting this facility for additional information.
- **Copper.** Increase is attributed to a single facility, Chalmette Refining LLC, Chalmette, LA, which increased its copper discharge from 32 to 7,603 pounds. EPA is in the process of contacting this facility for additional information.

Discharges of other metals reported in TRI by petroleum refineries, in terms of pounds and TWPE, were consistent with the discharges in the 2004 detailed study.

Silver discharges from petroleum refineries reporting to *PCSLoads2002\_v2* represent the fourth largest pollutant discharge in terms of TWPE. Silver is not currently regulated under the petroleum refining ELGs, and therefore refineries only monitor for silver if their permit contains state or water-quality-based limits. *PCSLoads2002\_v2* shows silver discharges from seven facilities, for a total of 769 pounds. One facility, Premcor Refining Group in Port Arthur, TX, was responsible for approximately 98 percent (752 pounds) of the category's silver discharges. EPA contacted the Premcor Refining Group (now Valero Energy Corporation) requesting clarification of the reported silver discharge and the source of silver in wastewater. EPA determined that most of the times the facility analyzed its final effluent for silver, the metal was not detected above the sample detection limit (0.02 mg/L). The facility stated that since January 1, 2003, silver was only detected in 2 of 174 analyses (Hughes, 2006).

EPA determined that the conclusions drawn during the 2004 detailed study still apply because the discharges for most metals did not change from the 2004 detailed study to the 2006 annual review, and for those metals that did change, the change can be attributed to one facility. Therefore, EPA concludes that metals may be present in petroleum refining wastewaters, but their concentrations are at or near treatable levels, leaving little to no opportunity to reduce metals discharges through conventional end-of-pipe treatment.

#### **14.5.4 Petroleum Refining Category Sulfide Discharges**

During its 2004 detailed study of the Petroleum Refining Category, EPA found the following regarding sulfide discharges:

- Based on available analytical data, petroleum refineries are achieving final effluent concentrations less than baseline values and less than existing limits at 40 CFR Part 419; and
- Refineries are treating sulfide to concentrations at or near treatable levels.

Sulfide is currently regulated under the existing petroleum refining ELGs, and therefore, is monitored and reported for many facilities in *PCSLoads2002\_v4*. In 2002, sulfide was reported by 77 of the 107 major dischargers reporting to PCS. The amount of sulfide discharged decreased from *PCSLoads2000\_v6* to *PCSLoads2002\_v4* by approximately 17 percent; however, the number of facilities reporting discharges of sulfide increased by 10 percent.

EPA determined that the conclusions drawn during the 2004 detailed study still apply because the amount of sulfide discharged decreased from the 2004 detailed study to the 2006 annual review. Therefore, EPA continues to find that petroleum refineries are achieving final sulfide concentrations less than baseline values and less than existing 40 CFR Part 419 limits.

#### **14.5.5 Petroleum Refining Category Pollution Control Technologies**

During the 2004 detailed study of the petroleum refining industry, EPA investigated treatment technologies for the control of dioxin and dioxin-like compounds, PACs, and sulfide. For more information about these control technologies, see the 2004 Technical Support Document (U.S. EPA, 2004). During the 2006 annual review, EPA did not identify any new control technologies in use for dioxin and dioxin-like compounds, PACs, metals, or sulfide in petroleum refinery wastewater. As new treatment technologies and/or pollution prevention methods become available, EPA will evaluate their treatment effectiveness compared with current pollutant discharges from petroleum refiners.

#### **14.6 Petroleum Refining Category Conclusions**

- EPA previously determined that dioxin and dioxin-like compounds are produced during catalytic reforming and catalyst regeneration operations at petroleum refineries. Of the 163 identified U.S. petroleum refineries, 17 report discharges of dioxin and dioxin-like compounds to TRI. Of the 17 refineries reporting discharges in 2002, only five reported dioxin discharges based on analytical measurements. Only two of these facilities detected dioxin and dioxin-like compounds above the Method 1613B minimum level and both of these facilities measured dioxin at the point immediately following catalytic regeneration and prior to wastewater treatment.

- Petroleum refineries report PACs discharges to TRI; however, these discharges are either based on one-half the detection limit multiplied by the flow or are estimated using emission factors. Out of 39 dischargers that reported PACs, EPA has verified only three petroleum refineries that measured PACs in their final effluent. Of these, two discharge indirectly to POTWs and receive additional treatment prior to discharge to surface waters and the third reported PAC discharges representing 81 TWPE. Therefore, there is little evidence that PACs are being discharged to surface waters in concentrations above the detection limit.
- Sulfide discharges are currently regulated by 40 CFR 419, and facilities are achieving final effluent concentrations less than baseline values and less than the existing limits.
- Metals may be present in petroleum refining wastewaters, but their concentrations are at or near treatable levels, leaving little to no opportunity to reduce metal discharges through conventional end-of-pipe treatment.

#### **14.7 Petroleum Refining References**

Beener, David. 2005. Telephone conversation with David Beener of ExxonMobil Joliet Refinery, Channahon, IL, and TJ Finseth of Eastern Research Group, Inc. “ExxonMobil Joliet Dioxin Discharges in TRI 2002.” (June 2). DCN 01905.

Bennett, Toni. 2005. Telephone conversation with Toni Bennett of Calcasieu, Lake Charles, LA, and TJ Finseth of Eastern Research Group, Inc. “Calcasieu PACs Discharges in TRI 2002.” (May 31). DCN 01908.

Brzuzy, Louis. 2006. Telephone conversation with Louis Brzuzy of Shell, Deer Park, TX, and TJ Finseth of Eastern Research Group, Inc. “Shell Deer Park Refinery Dioxin and Dioxin-Like Compound Discharges.” (August 30). DCN 03772.

Chelpaty, Heather. 2006. Telephone conversation with Heather Chelpaty of Valero, Delaware City, DE, and TJ Finseth of Eastern Research Group, Inc. “Valero Delaware City Refinery Dioxin and Dioxin-Like Compounds and PACs Discharges.” (August 7). DCN 03771.

GCA. Unknown. Gulf Coast Waste Disposal Authority. 2003 Peak Performance Award Application. DCN 04078.

Golden, Jan. 2005. Telephone conversation with Jan Golden of Flint Hills Resources, Corpus Christi, TX, and TJ Finseth of Eastern Research Group, Inc. “Flint Hills PACs Discharges in TRI 2002.” (May 23). DCN 01904.

Hamann, Ernie, et al. 2005. Telephone conversation with Ernie Hamann and Brian Christlieb of Conoco Phillips, Wilmington, CA, and TJ Finseth of Eastern Research Group, Inc. “Dioxin Releases from Conoco Phillips Wilmington, CA to TRI 2002.” (June 13). DCN 01906.

Hughes, Steve. 2006. Telephone conversation with Steve Hughes of Valero, Port Arthur, TX, and TJ Finseth of Eastern Research Group, Inc. “Valero Port Arthur Refinery Silver, Mercury, and Lead Discharges.” (July 12). DCN 03770.

Marton, Reed. 2005. Telephone conversation with Reed Marton of Conoco Phillips Lake Charles Refinery, Westlake, LA, and TJ Finseth of Eastern Research Group, Inc. “Conoco Phillips Dioxin and PACs Discharges in TRI 2002 and Sulfide Discharge in PCS 2002.” (May 20). DCN 01907.

Nelson, Jim, et al. 2004. Telephone conversation with Jim Nelson of BP Oil Co., Roger Claff of American Petroleum Institute, Jan Matuszko of U.S. EPA/EAD, and Jill Lucy of Eastern Research Group, Inc. “Dioxin Discharges from BP Oil Company’s Toledo Refinery.” (July 26). DCN 01172.

Pierce, D.W. 2005. Letter to T.J. Finseth, Eastern Research Group, Inc., from D.W. Pierce, Chevron. “Chevron Dioxin and PACs Wastewater Discharges.” (July 22). DCN 01924.

Rosin, Scott. 2006. Telephone conversation with Scott Rosin of Tesoro, Kenai, AK, and TJ Finseth of Eastern Research Group, Inc. “Dioxin and PAC Discharges Reported to TRI from Tesoro Alaska.” (September 7). DCN 03773.

Sheard, Honor. 2005. Telephone conversation with Honor Sheard of Marathon Ashland, Detroit, MI, and TJ Finseth of Eastern Research Group, Inc. “Marathon Ashland, Detroit, MI, Dioxin and PACs Discharges.” (February 3). DCN 01545.

Spurling, Rebecca. 2005. Telephone conversation with Rebecca Spurling of Tesoro Northwest Co., Anacortes, WA, and TJ Finseth of Eastern Research Group, Inc. “Tesoro Northwest Dioxin Discharges in TRI 2002.” (June 29). DCN 01957.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary 2005 Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

Zipf, Lynn. 2004. U.S. EPA. Memorandum to 304(m) Record, EPA Docket Number OW-2004-0074 from Lynn Zipf, EPA and Jan Matuszko, EPA. “Revisions to TWFs for Dioxin and its Congeners and Recalculated TWPEs for OCPSF and Petroleum Refining.” (August 10). DCN 01166.

Table 14-11. 2000, 2002, and 2003 Dioxin Discharges Reported to TRI by Petroleum Refineries

| TRI ID          | Refinery                             | Location          | 2000 TRI           |                   |                                | 2002 TRI           |                   |                                | 2003 TRI           |                   |                                | Did Facility Detect Dioxin and Dioxin-like Compounds at Any Level? | Information Collected by EPA on Dioxin Releases Reported to TRI in 2000, 2002, and 2003  |
|-----------------|--------------------------------------|-------------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--|--|
|                 |                                      |                   | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> |  |  |
| 98221SHLLLWESTM | Tesoro Northwest Co.                 | Anacortes, WA     | 5.20               | 97,100            | M                              | 1.63               | 45,500            | M                              | 1.70               | 47,000            | M                              | Yes  | Facility collected two samples of final effluent in both 2000 and 2001. Several congeners detected above the detection limit (Spurling, 2005).   |
| 77590MRTHNFOOTO | Marathon Ashland Petroleum LLC       | Texas City, TX    | 2                  | 272,00            | O                              | 0.00435            | 301               | O                              | NR                 | NR                | NR                             | No   | Because 2002/2003 reported dioxin discharges are small relative to other facilities, EPA has not contacted this facility.  |
| 70669CNCLKOLDSP | Conoco Lake Charles Refinery         | Westlake, LA      | 0.54               | 73,400            | E                              | 0.539              | 48,600            | O                              | 0.539              | 48,600            | O                              | No   | Estimate is based on emission factors (Marton, 2005).  |
| 94802CHVRN841ST | Chevron Prods. Co. Richmond Refinery | Richmond, CA      | 0.34               | 45,600            | O                              | 0.76               | 19,200            | O                              | 0.682              | 36,800            | O                              | No   | Estimate is based on detection limit. Two samples were analyzed (no results above sample detection limit) (U.S. EPA, 2004).  |
| 90245CHVRN324WE | Chevron USA Prods. Co.               | El Segundo, CA    | 0.33               | 30,100            | M                              | 0.109              | 11,200            | M                              | 0.344              | 35,300            | M                              | No   | Wastewater effluent was analyzed for dioxins in 2002. None of the congeners were detected above the sample detection limit. Estimate based on one-half the detection limit (Pierce, 2005). |
| 43616SHLCM4001C | BP Oil Co. Toledo Refinery           | Oregon, OH        | 0.286              | 53,200            | M                              | 0.36               | 51,200            | M                              | 0.38               | 54,100            | M                              | Yes  | One set of samples was collected and analyzed: 9 congeners were above the detection limit (Nelson, 2004).  |
| 07036XXN 1400P  | Bayway Refining Co.                  | Linden, NJ        | 0.254              | 63,700            | M                              | 0.25               | 5,230             | M                              | NR                 | NR                | NR                             | No   | Based on one-half the detection limit. Treated effluent samples are all not detected (U.S. EPA, 2004).   |
| 74603CNCNP1000S | Conoco Inc. Ponca City Refinery      | Ponca City, OK    | 0.181              | 24,627            | O                              | 0.445              | 30,800            | O                              | 0.283              | 21,900            | O                              | No   | Discharge was estimated using non-refinery-specific data for dioxin in petroleum products (U.S. EPA, 2004).  |
| 59101CNCBL401SO | Conoco Inc. Billings Refinery        | Billings, MT      | 0.162              | 22,000            | O                              | NR                 | NR                | NR                             | NR                 | NR                | NR                             | No   | Discharge was estimated using non-refinery-specific data for dioxin in petroleum products (U.S. EPA, 2004).  |
| 08066MBLLCBILLI | Valero Refining Co. New Jersey       | Paulsboro, NJ     | 0.09               | 12,300            | O                              | 0.088              | 6,100             | O                              | 0.088              | 6,810             | O                              | No   | Facility reported wastewater release for 2000 should be 0.0002 grams (U.S. EPA, 2004).   |
| 00851HSSLVLIMET | Hovensa LLC                          | Christiansted, VI | 0.0693             | 9,440             | C                              | 0.0335             | 2,320             | C                              | 1.10               | 85,200            | C                              | No   | Estimate based on EPA discharge factors (U.S. EPA, 2004).  |

Table 14-11 (Continued)

| TRI ID          | Refinery  | Location          | 2000 TRI           |                   |                                | 2002 TRI           |                   |                                | 2003 TRI           |                   |                                | Did Facility Detect Dioxin and Dioxin-like Compounds at Any Level? | Information Collected by EPA on Dioxin Releases Reported to TRI in 2000, 2002, and 2003  |
|-----------------|---|-------------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--|--|
|                 |   |                   | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> |  |  |
| 80022CNCDN5801B | Conoco Denver Refinery                            | Denver, CO        | 0.06               | 8,170             | O                              | 0.0950             | 6,580             | E                              | 0.074              | 5,730             | E                              | No   | Based on internally generated emission factors per corporate policy (U.S. EPA, 2004).  |
| 39567CHVRNPOBOX | Chevron Prods. Co. Pascagoula Refinery            | Pascagoula, MS    | 0.035              | 4,770             | O                              | 0.086              | 3,680             | O                              | 0.099              | 4,230             | O                              | No   | Facility used monitoring data collected in 2001 from the catalytic reformer units to develop an emission factor (Pierce, 2005).  |
| 62454MRTHNMARAT | Marathon Ashland Petroleum LLC                    | Robinson, IL      | 0.03               | 4,080             | O                              | 0.04               | 2,780             | O                              | 0.0404             | 3,130             | O                              | No   | Because 2002/2003 reported dioxin discharges are small relative to other facilities, EPA has not contacted this facility.  |
| 00654PHLPSPHILI | Chevron Phillips Chemical Puerto Rico             | Guayama, PR       | 0.00218            | 297               | E                              | NR                 | NR                | NR                             | 0.00596            | 461               | E                              | No   | Because 2002/2003 reported dioxin discharges are small relative to other facilities, EPA has not contacted this facility.  |
| 70602CTGPTHIGHW | Citgo Petroleum Corp                              | Lake Charles, LA  | 0.0016             | 218               | E                              | 0.00257            | 178               | E                              | 0.00257            | 199               | E                              | No   | Based on EPA discharge factors (U.S. EPA, 2004).   |
| 79905CHVRN6501T | Chevron USA El Paso Refinery                      | El Paso, TX       | 0.0187             | 2,550             | O                              | NR                 | NR                | NR                             | NR                 | NR                | NR                             | No   | Based on one-half the detection limit (U.S. EPA, 2004).  |
| 90748NCLLS1660W | Conoco Phillips Co. La Refinery Wilmington Plant  | Wilmington, CA    | 0.320              | -                 | M                              | 0.28               | 22,300            | M                              | 0.0884             | 9,020             | M                              | Yes  | Facility used monitoring data collected from catalytic reformer discharge after regeneration. Facility detected all 17 congeners (Hamann, 2005).   |
| 60434MBLJLINTER | ExxonMobil Oil Corp. Joliet Refinery.             | Channahon, IL     | NR                 | NR                | NR                             | 0.434              | 39,600            | O                              | 0.0007             | 64                | O                              | No   | For 2002, facility had monitoring data reporting TCDD as not detected. Discharge estimated based on one-half detection limit (Beener, 2005).   |
| 19706TXCDL2000W | Premcor Refining Group Inc Delaware City Refinery | Delaware City, DE | NR                 | NR                | NR                             | NR                 | NR                | NR                             | 0.022              | 559               | O                              | No   | Facility estimated discharge based on dioxin and dioxin-like compound measurements from the co-located power plant, not from refinery wastewaters (Chelpaty, 2006).  |
| 77536DRPRK5900H | Shell Chemical Company Deer Park                  | Deer Park, TX     | NR                 | NR                | NR                             | NR                 | NR                | NR                             | 0.152              | 14,600            | O                              | Yes  | TCEQ analyzed effluent for dioxin and dioxin-like compounds and detected six congeners in the particle-bound fraction and 16 congeners in the dissolved fraction. TCDD was not detected in either fraction (Brzuzy, 2006). |

Table 14-11 (Continued)

| TRI ID   | Refinery                       | Location    | 2000 TRI           |                   |                                | 2002 TRI           |                   |                                | 2003 TRI           |                   |                                | Did Facility Detect Dioxin and Dioxin-like Compounds at Any Level? | Information Collected by EPA on Dioxin Releases Reported to TRI in 2000, 2002, and 2003  |
|--|--------------------------------|-------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--------------------|-------------------|--------------------------------|--|--|
|  |                                |             | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Grams <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> |  |  |
| 99611TSRLSMILE2  | Tesoro Alaska - Kenai Refinery | Kenai, AK   | NR                 | NR                | NR                             | NR                 | NR                | NR                             | 0.0006             | 46                | M                              | Yes  | Facility used monitoring data collected from catalytic reformer discharge after regeneration in 2003. Facility detected 5 congeners; however, none were detected above the Method 1613B minimum level (Rosin, 2006). |
| <b>Refineries Not in EPA's Analysis: No Discharge of Dioxins</b> |                                |             |                    |                   |                                |                    |                   |                                |                    |                   |                                |  |  |
| 48217MRTHN1300S  | Marathon Ashland Petroleum LLC | Detroit, MI | 8.06               | 0                 | NA <sup>d</sup>                | 8.06               | 0                 | O                              | -                  | -                 | -                              | No   | Incorrect number reported for 2000 and 2002: should be zero discharge. Refinery submitted TRI correction form (Sheard, 2005).  |

Source: *TRIRelases2003\_v2*; *TRIRelases2002\_v4*; Memorandum: Revisions to TWFs for Dioxin and its Congeners and Recalculated TWPEs for OCPSF and Petroleum Refining (Zipf, 2004).

NR – Not Reported.

<sup>a</sup>For indirect discharges, the mass shown is the mass transferred to the POTW that is ultimately discharged to surface waters, accounting for an estimated 83% removal of dioxin and dioxin-like compounds by the POTW.

<sup>b</sup>The TWPEs in this table were calculated using the 2006 TWFs (the 2006 dioxin and dioxin-like compound TWFs did not change from the August or December 2004 TWFs).

<sup>c</sup>Refineries reported basis of estimate in TRI as: M - Monitoring data/measurements; C - Mass balance calculations; E - Published emission factors; and O - Other approaches (e.g., engineering calculations).

<sup>d</sup>No basis of estimate was reported.

**Note: Bolded lines indicate facilities that measured for and detected dioxin and dioxin-like compounds.**

Table 14-12. 2000, 2002, and 2003 PACs Discharges Reported to TRI by Petroleum Refineries

| TRI ID          | Refinery                               | Location         | 2000 TRI            |                   |                                | 2002 TRI            |                   |                                | 2003 TRI            |                   |                                | Information Collected by EPA on 2000, 2002, and 2003 PAC Discharge Estimates  |
|-----------------|--|------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---|
|                 |  |                  | Pounds <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>d</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>e</sup> | Basis of Estimate <sup>c</sup> |   |
| 77592TXSCTLOOP1 | Valero Refining Co. Texas              | Texas City, TX   | 64                  | 14,800            | M                              | 69                  | 1,810             | M                              | NR                  | NR                | NR                             | Estimate based on one-half the detection limit. One sample contained PACs (U.S. EPA, 2004).   |
| 94572NCLSNOLDHI | Tosco San Francisco Refinery           | Rodeo, CA        | 57                  | 13,100            | M                              | 8                   | 210               | M                              | NR                  | NR                | NR                             | Estimate based on one-half the detection limit (U.S. EPA, 2004).  |
| 70037LLNCRHIGHW | Tosco Refining Co. Alliance Refinery   | Belle Chasse, LA | 40                  | 9,220             | O                              | 31                  | 815               | M                              | 34.9                | 887               | M                              | Estimate based on one-half the detection limit (U.S. EPA, 2004).  |
| 70669CNCLKOLDSP | Conoco Lake Charles Refinery           | Westlake, LA     | 22                  | 5,069             | O                              | 31                  | 815               | O                              | 51                  | 1,300             | O                              | Estimate based on emission factors (Marton, 2005).  |
| 96707CHVRN91480 | Chevron Prods. Co. Hawaii Refinery     | Kapolei, HI      | 20                  | 4,610             | M                              | 277                 | 7,280             | M                              | 261                 | 6,630             | M                              | Estimate based on one-half the detection limit. Individual PACs sampled from 2000 NPDES permit renewal were all nondetect (Pierce, 2005).                                       |
| 99611TSRLSMILE2 | Tesoro Alaska Co. Kenai Refinery       | Kenai, AK        | 19                  | 4,380             | O                              | 19                  | 497               | O                              | 18.9                | 480               | O                              | Facility measured eight PACs in the refinery effluent in October 2000. However, none of the eight individual PACs were measured above the method detection limit (Rosin, 2006). |
| 39567CHVRNPOBOX | Chevron Prods. Co. Pascagoula Refinery | Pascagoula, MS   | 17                  | 3,920             | O                              | 110                 | 2,890             | O                              | 115                 | 2,920             | O                              | Estimates based on EPA's BAT effluent guidelines estimate for PACs (Pierce, 2005).  |
| 62454MRTHNMARAT | Marathon Ashland Petroleum LLC         | Robinson, IL     | 15                  | 3,460             | O                              | 21                  | 552               | O                              | 1                   | 25                | O                              | Because the facility reports the basis of estimate as "other", EPA has not contacted this facility.   |
| 62084SHLLLRTE11 | Tosco Wood River Refinery              | Roxana, IL       | 10                  | 2,300             | O                              | 9                   | 234               | O                              | 10                  | 254               | O                              | Estimate based on one-half the detection limit (U.S. EPA, 2004).  |

Table 14-12 (Continued)

| TRI ID                 | Refinery                                       | Location           | 2000 TRI            |                   |                                | 2002 TRI            |                   |                                | 2003 TRI            |                   |                                | Information Collected by EPA on 2000, 2002, and 2003 PAC Discharge Estimates   |
|------------------------|--|--------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|--|
|                        |  |                    | Pounds <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>d</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>e</sup> | Basis of Estimate <sup>c</sup> |  |
| 74603CNCPN1000S        | Conoco Inc. Ponca City Refinery                | Ponca City, OK     | 9                   | 2,070             | O                              | 8                   | 210               | O                              | 8                   | 203               | O                              | Refinery estimated discharge using API data for PACs in petroleum products (U.S. EPA, 2004).   |
| 84116CHVRN2351N        | Chevron USA Prods. Co                          | Salt Lake City, UT | 8                   | 1,840             | O                              | 59                  | 1,550             | M                              | 59                  | 1,500             | M                              | EPA has not contacted this facility.   |
| 80022CNCNDN5801B       | Conoco Denver Refinery                         | Commerce City, CO  | 5                   | 1,150             | O                              | 9                   | 237               | O                              | 53                  | 1,350             | O                              | Estimate based on internally generated emission factors (U.S. EPA, 2004).  |
| 70047TRNSM14902        | Orion Refining Corp.                           | New Sarpy, LA      | 4                   | 922               | C                              | 9                   | 237               | O                              | 9                   | 229               | O                              | Estimate based on one-half the detection limit (U.S. EPA, 2004).   |
| 90744TXCRF2101E        | Equilon Enterprises LLC Los Angeles Refining   | Wilmington, CA     | 3                   | 732               | O                              | 3                   | 83                | NA <sup>f</sup>                | 0.957               | 24                | M                              | Because 2002/2003 reported PACs discharges are small relative to other facilities, EPA has not contacted this facility.                                  |
| <b>77017LYNDL12000</b> | <b>Lyondell-Citgo Refining L.P.</b>            | <b>Houston, TX</b> | <b>175</b>          | <b>40,400</b>     | <b>NA<sup>f</sup></b>          | <b>163</b>          | <b>4,290</b>      | <b>M</b>                       | <b>154</b>          | <b>3,930</b>      | <b>O</b>                       | <b>Indirect discharger - PACs were detected in refinery effluent, but were not detected in the POTW effluent (the Gulf Coast Waste Authority) (GCA).</b> |
| 77506CRWNC111RE        | Crown Central Petroleum Corp. Houston Refinery | Pasadena, TX       | 7                   | 1,650             | NA <sup>f</sup>                | 5                   | 121               | NA <sup>f</sup>                | NR                  | NR                | NR                             | Indirect discharger - PACs were not detected in the POTW effluent (U.S. EPA, 2004).  |
| <b>48217MRTHN1300S</b> | <b>Marathon Ashland Petroleum L.L.C.</b>       | <b>Detroit, MI</b> | <b>6</b>            | <b>1,370</b>      | <b>NA<sup>f</sup></b>          | <b>7</b>            | <b>180</b>        | <b>NA<sup>f</sup></b>          | <b>6.75</b>         | <b>172</b>        | <b>M</b>                       | <b>Facility detected five PACs in final effluent (Sheard, 2005).</b>   |
| 79905CHVRN6501T        | Chevron USA El Paso Refinery                   | El Paso, TX        | 4                   | 933               | NA <sup>f</sup>                | 2                   | 46                | NA <sup>f</sup>                | NR                  | NR                | NR                             | Estimate based on one-half the detection limit (U.S. EPA, 2004).   |
| 70606CLCSRWESTE        | Calcasieu                                      | Lake Charles, LA   | 1.1 <sup>g</sup>    |                   | M                              | 191                 | 5,020             | O                              | 182                 | 4,630             | O                              | Estimate based on emission factors (Bennett, 2005).  |

Table 14-12 (Continued)

| TRI ID                 | Refinery                                 | Location                 | 2000 TRI            |                   |                                | 2002 TRI            |                   |                                | 2003 TRI            |                   |                                | Information Collected by EPA on 2000, 2002, and 2003 PAC Discharge Estimates  |
|------------------------|--|--------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---|
|                        |  |                          | Pounds <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>d</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>e</sup> | Basis of Estimate <sup>c</sup> |   |
| 67042TXCRF1401S        | Frontier                                 | El Dorado, KS            | 1.1 <sup>g</sup>    |                   | O                              | 1                   | 26                | O                              | 0.7                 | 18                | O                              | Not in <i>TRIRelases2000_v4</i> : 1.1 lb/yr discharge PACs based on discharges at similar refinery reported to TRI (U.S. EPA, 2004).                        |
| 00851HSSLVLIMET        | Hovensa L.L.C.                           | Christiansted, VI        | 2                   | 461               | NA <sup>f</sup>                | NR                  | NR                | NR                             | NR                  | NR                | NR                             | Discharge from accidental spill; monitoring data indicate zero discharge of PACs (U.S. EPA, 2004).  |
| 78410KCHRFSUNTI        | Flint Hills Resources L.P. West Plant    | Corpus Christi, TX       | NR                  | NR                | NR                             | 1,770               | 46,500            | M                              | 8                   | 203               | M                              | Estimate based on one-half the detection limit. Facility did not detect any PACs in final effluent (Golden, 2005).  |
| 90245CHVRN324WE        | Chevron USA Inc. Chevron Prods. Co. Div. | El Segundo, CA           | NR                  | NR                | NR                             | 287                 | 7,530             | M                              | 117                 | 2,970             | M                              | In 2002, facility analyzed wastewater for seven PACs: all were nondetect. Estimate based on EPA's BAT effluent guidelines estimate for PACs (Pierce, 2005). |
| <b>19706TXCDL2000W</b> | <b>Premcor Refining Group</b>            | <b>Delaware City, DE</b> | <b>NR</b>           | <b>NR</b>         | <b>NR</b>                      | <b>1.4</b>          | <b>37</b>         | <b>O</b>                       | <b>3.2</b>          | <b>81</b>         | <b>O</b>                       | <b>In 2002 and 2003, the facility detected eight individual PACs in the refinery effluent from wastewater treatment (Chelpaty, 2006).</b>                   |
| 77590MRTHNFOOTO        | Marathon Ashland Petroleum L.L.C.        | Texas City, TX           | NR                  | NR                | NR                             | 93                  | 2,450             | M                              | 30.2                | 768               | M                              | EPA has not contacted this facility.  |
| 70750HLLPTHWY10        | Valero Refining Co. Louisiana            | Krotz Springs, LA        | NR                  | NR                | NR                             | 19                  | 499               | O                              | 19                  | 483               | O                              | EPA has not contacted this facility.  |
| 74107SNCLR902W2        | Sinclair Oil Corp. Tulsa Refinery.       | Tulsa, OK                | NR                  | NR                | NR                             | 17                  | 452               | M                              | 17.7                | 450               | M                              | EPA has not contacted this facility.  |
| 94802CHVRN841ST        | Chevron Prods. Co. Richmond Refinery.    | Richmond, CA             | NR                  | NR                | NR                             | 14                  | 363               | M                              | 14.8                | 376               | M                              | EPA has not contacted this facility.  |
| 73098KRRMC906SO        | Wynnewood Refining Co.                   | Wynnewood, OK            | NR                  | NR                | NR                             | 10                  | 263               | O                              | 10                  | 254               | O                              | EPA has not contacted this facility.  |

Table 14-12 (Continued)

| TRI ID          | Refinery  | Location          | 2000 TRI            |                   |                                | 2002 TRI            |                   |                                | 2003 TRI            |                   |                                | Information Collected by EPA on 2000, 2002, and 2003 PAC Discharge Estimates |
|-----------------|---|-------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|--|
|                 |   |                   | Pounds <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>d</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>e</sup> | Basis of Estimate <sup>c</sup> |  |
| 59101CNCBL401SO | Conoco Phillips Billings Refinery.              | Billings, MT      | NR                  | NR                | NR                             | 8                   | 210               | M                              | 0.4                 | 10                | M                              | EPA has not contacted this facility.   |
| 70723TXCRFFOOTO | Convent Refinery.                               | Convent, LA       | NR                  | NR                | NR                             | 2                   | 61                | O                              | 2                   | 51                | O                              | EPA has not contacted this facility.   |
| 79905LPSRF6500T | Western Refining Co. El Paso Refinery.          | El Paso, TX       | NR                  | NR                | NR                             | 2                   | 47                | NA <sup>f</sup>                | 4.01                | 102               | O                              | EPA has not contacted this facility.   |
| 94553TSCCRAVONR | Tesoro Refining & Marketing Co.                 | Martinez, CA      | NR                  | NR                | NR                             | 1.3                 | 34                | M                              | 0.6                 | 15                | M                              | EPA has not contacted this facility.   |
| 98221PGTSN600ST | Shell Oil Prods. U.S. Puget Sound Refinery.     | Anacortes, WA     | NR                  | NR                | NR                             | 1.1                 | 28                | O                              | 0.9                 | 23                | O                              | EPA has not contacted this facility.   |
| 82701WYMNG740WE | Wyoming Refining Co.                            | Newcastle, WY     | NR                  | NR                | NR                             | 1.1                 | 28                | E                              | -                   | -                 | -                              | EPA has not contacted this facility.   |
| 08861CHVRN1200S | Chevron Prods. Co.                              | Perth Amboy, NJ   | NR                  | NR                | NR                             | 0.8                 | 21                | O                              | 0.6                 | 15                | O                              | EPA has not contacted this facility.   |
| 93420NCLSN2555W | Conoco Phillips Santa Maria Facility            | Arroyo Grande, CA | NR                  | NR                | NR                             | 0.8                 | 21                | O                              | 2                   | 51                | O                              | EPA has not contacted this facility.   |
| 19061BPLCMPOSTR | Conoco Phillips Co. Trainer Refinery.           | Trainer, PA       | NR                  | NR                | NR                             | 0.4                 | 11                | O                              | 0.2                 | 5.08              | O                              | EPA has not contacted this facility.   |
| 93307KRNLRRR677 | Kern Oil & Refining Co.                         | Bakersfield, CA   | NR                  | NR                | NR                             | 0.02                | 1                 | NA <sup>f</sup>                | 0.0206              | 0.52              | M                              | EPA has not contacted this facility.   |
| 42501THSMR501RE | Somerset Refinery. Inc.                         | Somerset, KY      | NR                  | NR                | NR                             | 0.01                | 0                 | M                              | 0.08                | 2.03              | M                              | EPA has not contacted this facility.   |
| 36611BLCHRVIADU | Trigeant Ep Ltd                                 | Chickasaw, AL     | NR                  | NR                | NR                             | NR                  | NR                | NR                             | 0.000662            | 0.017             | C                              | EPA has not contacted this facility.   |
| 46394MCLC2815I  | BP Products North America Whiting Business Unit | Whiting, IN       | NR                  | NR                | NR                             | NR                  | NR                | NR                             | 1                   | 25                | O                              | EPA has not contacted this facility.   |
| 70051MRTHNHWY61 | Marathon Ashland Petroleum LLC                  | Garyville, LA     | NR                  | NR                | NR                             | NR                  | NR                | NR                             | 5                   | 127               | C                              | EPA has not contacted this facility.   |
| 70143TNNCL500WE | Chalmette Refining LLC                          | Chalmette, LA     | NR                  | NR                | NR                             | NR                  | NR                | NR                             | 11                  | 280               | O                              | EPA has not contacted this facility.   |

Table 14-12 (Continued)

| TRI ID          | Refinery                              | Location           | 2000 TRI            |                   |                                | 2002 TRI            |                   |                                | 2003 TRI            |                   |                                | Information Collected by EPA on 2000, 2002, and 2003 PAC Discharge Estimates |
|-----------------|---------------------------------------|--------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|---------------------|-------------------|--------------------------------|--|
|                 |                                       |                    | Pounds <sup>a</sup> | TWPE <sup>b</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>d</sup> | Basis of Estimate <sup>c</sup> | Pounds <sup>a</sup> | TWPE <sup>e</sup> | Basis of Estimate <sup>c</sup> |  |
| 78408STHWS1700N | Flint Hills Resources L.P. East Plant | Corpus Christi, TX | NR                  | NR                | NR                             | NR                  | NR                | NR                             | 1                   | 25                | M                              | EPA has not contacted this facility.   |

Source: *TRIRelases2003\_v2*; *TRIRelases2002\_v4*; *TRIRelases2000\_v4*.

NR – Not Reported.

<sup>a</sup>For indirect dischargers, the mass shown is the mass transferred to the POTW that is ultimately discharged to surface waters, accounting for an estimated 92.64% removal of PACs by the POTW.

<sup>b</sup>The 2000 TWPE was calculated using the August 2004 TWFs.

<sup>c</sup>Refineries reported basis of estimate in TRI as: M - Monitoring data/measurements; C - Mass balance calculations; E - Published emission factors; and O - Other approaches (e.g., engineering calculations).

<sup>d</sup>The 2002 TWPE was calculated using the December 2004 TWFs.

<sup>e</sup>The 2003 TWPE was calculated using the April 2006 TWFs.

<sup>f</sup>No basis of estimate was reported.

<sup>g</sup>The facility discharge is not in *TRIRelases2000\_v4*; however, industry commented that 1.1 pounds of PACs were reported to TRI in 2000 as discharged.

**Note: Bolded lines indicate facilities that measured for and detected PACs.**

## 15.0 PLASTICS MOLDING AND FORMING (40 CFR PART 463)

EPA selected the Plastics Molding and Forming (PMF) Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FR 51050, August 29, 2005). The high TWPE for the PMF Category is due primarily to carbon disulfide discharges from six cellulose products manufacturers (U.S. EPA, 2005b). Excluding these discharges from the category reduces the combined PCS and TRI TWPE for 2002 by approximately 73 percent. This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the PMF category. EPA's 2006 annual review builds on the 2005 annual review.

### 15.1 PMF Category Background

This subsection provides background on the PMF Category including a brief profile of the PMF industry, background on 40 CFR Part 463, and background on 40 CFR Part 63 Subpart UUU, the Cellulose Products National Emission Standards for Hazardous Air Pollutants (NESHAP).

#### 15.1.1 PMF Industry Profile

The plastics molding and forming industry includes facilities that are engaged in blending, molding, forming, or other types of processing of plastic materials. These processes commonly include extrusion, coating and laminating, thermoforming, calendaring, casting, foaming, cleaning, and finishing (U.S. EPA, 1984). Table 15-1 lists the nine SIC codes with operations in the PMF Category.

**Table 15-1. Number of Facilities in Plastics Molding and Forming SIC Codes**

| SIC Code  | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|
| 3081: Unsupported Plastics Film & Sheet                 | 866                       | 59                    | 78                    |
| 3082: Unsupported Plastics Profile Shapes               | 670                       | 1                     | 28                    |
| 3083: Laminated Plastics Plate, Sheet, & Profile Shapes | 291                       | 4                     | 68                    |
| 3084: Plastics Pipe                                     | 437                       | 5                     | 25                    |
| 3085: Plastics Bottles                                  | 403                       | 2                     | 3                     |
| 3086: Plastics Foam Products                            | 1,185                     | 6                     | 222                   |
| 3087: Custom Compounding of Purchased Resin             | 579                       | 14                    | 200                   |
| 3088: Plastics Plumbing Fixtures                        | 541                       | 0                     | 165                   |
| 3089: Plastics Products, NEC                            | 12,689                    | 34                    | 670                   |
| <b>Total</b>  | <b>17,661</b>             | <b>125</b>            | <b>1,458</b>          |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

NEC - Not elsewhere classified.

### 15.1.2 40 CFR Part 463

EPA first promulgated ELGs for the PMF Category (40 CFR Part 463) on December 17, 1984 (49 FR 49040). There are three subcategories, all of which have BPT, NSPS, PSES, and PSNS limitations.

EPA determined in the 2005 annual review that the facilities responsible for the majority of the category TWPE in *TRIRelases2002\_v2* and *PCSLoads2002\_v2* manufacture cellulose film, sponge, and meat casings (U.S. EPA, 2005b). The discharges from these cellulose products manufacturers are not covered by Part 463. The products are made of regenerated cellulose using the viscose process. The applicability of the PMF Category excludes products manufactured from regenerated cellulose, as well as the molding and forming of regenerated cellulose (U.S. EPA, 1984). Further, the *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Plastics Molding and Forming Point Source Category* states that 40 CFR Part 414, Organic Chemicals, Plastics, and Synthetic Fibers (OCPSF) Point Source Category, covers only the manufacture of rayon, a regenerated cellulose fiber, and excludes the manufacture of cellulose film, sponge, and meat casings (U.S. EPA, 1987; U.S. EPA, 2005c). Thus, wastewater discharges from the manufacture of cellulose products are not covered by any existing categorical effluent limitations guidelines or pretreatment standards. Additionally, neither PMF nor OCPSF regulate discharges of carbon disulfide, the pollutant of concern for the cellulose products manufacturers identified in the 2005 annual review.

### 15.1.3 40 CFR Part 63 Subpart UUUU

The NESHAP for Cellulose Products Manufacturing (40 CFR Part 63, Subpart UUUU) was proposed on August 2000 and promulgated on June 11, 2002 (67 FR 40055). The Cellulose Products Manufacturing NESHAP regulates the following source categories:

- **Miscellaneous Viscose Processes.** Includes the cellulose food casings, rayon, cellulosic sponge, and cellophane manufacturing industries.
- **Cellulose Ethers Production.** Includes the methyl cellulose, hydroxypropyl methyl cellulose, hydroxypropyl cellulose, hydroxyethyl cellulose, and carboxymethyl cellulose manufacturing industries.

The Cellulose Products Manufacturing NESHAP establishes emissions limits for hazardous air pollutants HAP, such as carbon disulfide, carbonyl sulfide, ethylene oxide, methanol, methyl chloride, propylene oxide, and toluene. The Cellulose Products Manufacturing NESHAP includes requirements for the reduction in HAP emissions from process vents, carbon disulfide unloading and storage, toluene storage, equipment leaks and wastewater. EPA determined that wastewater generation for existing sources, for both the Miscellaneous Viscose Processes and Cellulose Ethers Production source categories, would increase by approximately 2.1 million gallons per year relative to the baseline due to the installation of air pollution control devices, such as Lo-Cat<sup>®</sup> scrubbers and carbon adsorbers (see 67 FR 40055, June 11, 2002).

The Cellulose Products Manufacturing NESHAP requires emission reductions for the cellulose food casing, cellulosic sponge, cellophane, and rayon manufacturing industries in the Miscellaneous Viscose Process Source Category. These industries are required to reduce HAP emissions from process vents in the following amounts:

- **Cellulose Food Casings.** Reduce total uncontrolled sulfide emissions, reported as carbon disulfide, by at least 25 percent based on a 6-month rolling average.
- **Cellulosic Sponge.** Reduce total uncontrolled sulfide emissions, reported as carbon disulfide, by at least 75 percent based on a 6-month rolling average.
- **Cellophane.** Reduce total uncontrolled sulfide emissions, reported as carbon disulfide, by at least 75 percent based on a 6-month rolling average.
- **Rayon.** Reduce total uncontrolled sulfide emissions, reported as carbon disulfide, by at least 35 percent within three years from the effective date based on a 6-month rolling average. Additional reductions of total uncontrolled sulfide emissions are required by at least 40 percent within eight years from the effective date based on a 6-month rolling average.

Additionally, all cellulose products manufacturing facilities must reduce by at least 83 percent their uncontrolled carbon disulfide emissions from process vents, unloading and storage operations, equipment leaks, and wastewater no later than June 13, 2005 for existing sources (see 67 FR 40055, June 11, 2002).

## **15.2 PMF Category 2005 Annual Review**

This subsection discusses EPA's 2005 annual review of the PMF Category including the screening-level review and category-specific review.

### **15.2.1 PMF Category 2005 Screening-Level Review**

Table 15-2 presents the PMF Category TWPE calculated using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 15-2. PMF Category 2005 Screening-Level Review Results**

| Point Source Category       | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|-----------------------------|----------------------------|----------------------------|------------|
| Plastic Molding and Forming | 466 <sup>c</sup>           | 97,297                     | 97,762     |

Source: 2005 Annual Screening-Level Analysis (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Excludes discharges from Innovia Films Inc. These discharges were excluded from the category PCS TWPE because, after initial review, EPA determined the discharges were not representative of the PMF category (U.S. EPA, 2005a). However, Innovia Films Inc. discharges were included in the 2005 detailed review of the PMF category, discussed in Section 15.4.

### 15.2.2 PMF Category 2005 Pollutants of Concern

Table 15-3 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five pollutants with the highest TWPE in *PCSLoads2002\_v2*. Discharges from Innovia Films Inc. were not included in the 2005 screening-level review category totals presented in Table 15-2, but are included in Table 15-3. The top five pollutants account for approximately 92 percent of the TRI and PCS 2002 combined TWPE.

Carbon disulfide contributed 58 percent of the category TRI TWPE for 2002 and approximately 97 percent of the category PCS TWPE for 2002. EPA reviewed web sites for facilities reporting carbon disulfide discharges to TRI and PCS in 2002 and determined that all the facilities manufacture regenerated cellulose products (Devro, Unknown; Innovia Films, 2004; Spontex, 2004; Viskase, 2002).

One facility, Sealed Air Corporation Cryovac Division, Simpsonville, SC, reported discharges of dioxin and dioxin-like compounds that contributed 34 percent of the category TRI TWPE for 2002. Section 15.5.4 presents additional discussion about the dioxin and dioxin-like compounds discharges.

Table 15-3. 2005 Annual Review: PMF Category Pollutants of Concern

| Pollutant                        | 2002 PCS <sup>a</sup>                   |                       |                | 2002 TRI <sup>b</sup>                   |                       |               |
|----------------------------------|---|-----------------------|----------------|---|-----------------------|---------------|
|                                  | Number of Facilities Reporting Chemical | Total Pounds Released | TWPE           | Number of Facilities Reporting Chemical | Total Pounds Released | TWPE          |
| Carbon Disulfide                 | 1                                       | 60,041                | 168,125        | 4                                       | 20,252                | 56,709        |
| Dioxin and Dioxin-Like Compounds | Pollutants are not reported to PCS.     |                       |                | 1                                       | 0.0015<br>(0.683 g)   | 33,452        |
| Sodium Nitrite                   |   |                       |                | 1                                       | 13,937                | 5,203         |
| Lead and Lead Compounds          |   |                       |                | 45                                      | 274                   | 614           |
| Formaldehyde                     |   |                       |                | 5                                       | 191,411               | 446           |
| Magnesium                        |   |                       |                | 1                                       | 1,829,470             | 1,583         |
| Sulfate                          | 1                                       | 197,419,795           | 1,106          |   |                       |               |
| Nitrogen, Nitrate Total (as N)   | 1                                       | 144,077               | 807            |   |                       |               |
| Calcium                          | 1                                       | 10,333,219            | 289            |   |                       |               |
| <b>PMF Category Total</b>        | <b>9</b>                                | <b>214,533,873</b>    | <b>172,483</b> | <b>153</b>                              | <b>1,380,691</b>      | <b>97,297</b> |

Source: *TRIRelases2002\_v2*; *PCSLoads2002\_v2*.

<sup>a</sup>Discharges include major dischargers only. Discharges from Innovia Films Inc. are included, so the PMF Category total for 2002 PCS is higher than from the 2005 screening-level review presented in Table 15-2.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 15.2.3 PMF Category Cellulose Products Facilities 2005 Pollutants of Concern

Table 15-4 separates the discharges from the cellulose products manufacturers and the rest of the category for *TRIRelases2002\_v2* and *PCSLoads2002\_v2*. The cellulose products manufacturers account for 73 percent of the combined 2002 TRI and PCS category TWPE. Almost all of the TWPE for the cellulose products manufacturers is from discharges of carbon disulfide.

**Table 15-4. 2005 Annual Review: PMF Category Discharges Excluding Cellulose Products Manufacturers**

|   | 2002 PCS <sup>a</sup>   |                | 2002 TRI <sup>b</sup>   |               |
|---|-------------------------|----------------|-------------------------|---------------|
|   | Total Pounds Discharged | TWPE           | Total Pounds Discharged | TWPE          |
| Cellulose Products Manufacturers                        | 212,796,835             | 172,170        | 39,830                  | 56,879        |
| PMF Category Excluding Cellulose Products Manufacturers | 1,737,038               | 313            | 1,340,861               | 40,418        |
| <b>Total</b>  | <b>214,533,873</b>      | <b>172,483</b> | <b>1,380,691</b>        | <b>97,297</b> |

Source: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include major dischargers only. Discharges from Innovia Films Inc. are included.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 15.3 Potential New Subcategories for the PMF Category

EPA did not identify any potential new subcategories for the PMF category.

### 15.4 PMF Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the PMF Category. EPA obtained additional data and identified:

- Errors in how PCS loads were estimated for one facility; and
- Changes in estimates of TWPE for sodium nitrite and nitrate.

#### 15.4.1 PMF Category Facility Discharge Revisions

EPA determined that one facility, Innovia Films Inc., responsible for 97 percent of the *PCSLoads2002\_v2* TWPE, reported an SIC code in *TRIRelases2002\_v2* that linked to the Pulp, Paper, and Paperboard Point Source Category. Innovia Films Inc. manufactures cellophane, a regenerated cellulose product. EPA concluded that discharges from Innovia Films Inc. should be included in the PMF Category with the other facilities manufacturing regenerated cellulose products. The revised TRI database, *TRIRelases2002\_v4*, incorporates this change.

EPA contacted Innovia Films Inc., the only facility reporting discharges of carbon disulfide for the PMF Category in *PCSLoads2002\_v2*. Innovia Films Inc. provided corrections to the effluent flow (Martin, 2006), allowing EPA to recalculate the pounds of pollutants discharged. The TWPE for Innovia Films Inc. were reduced by approximately 88 percent. Table 15-5 lists the changes to the pollutant load for Innovia Films Inc. which is incorporated in the revised PCS database *PCSLoads2002\_v4*.

**Table 15-5. PCS Database Changes for Innovia Films Inc.**

| Pollutant                      | Before Database Corrections,<br><i>PCSLoads2002_v2</i> |                | After Database Corrections,<br><i>PCSLoads2002_v4</i> |               |
|--------------------------------|--|----------------|---|---------------|
|                                | Pounds Discharged                                      | TWPE           | Pounds Discharged                                     | TWPE          |
| Carbon Disulfide               | 60,041   | 168,125        | 7,066   | 19,785        |
| Nitrogen, Nitrate Total (as N) | 144,077  | 807            | 34,173  | 109           |
| Calcium                        | 10,333,219   | 289            | 1,277,219   | 36            |
| Chlorine                       | 182  | 92             | 113   | 58            |
| Magnesium                      | 1,829,470  | 1,583          | 188,815   | 163           |
| Sulfate                        | 197,419,795  | 1,106          | 24,187,480  | 135           |
| Nitrogen, Ammonia              | 10,231   | 15             | 2,232   | 3             |
| Toluene                        | 4  | 0.02           | 4   | 0.02          |
| <b>Total</b>                   | <b>212,557,816</b>                                     | <b>172,018</b> | <b>25,697,102</b>                                     | <b>20,372</b> |

Source: *PCSLoads2002\_v2*; *PCSLoads2002\_v4*.

#### 15.4.2 PMF Category TWF and POTW Percent Removal Revisions

As described in Table 4-1 in Section 4.2, during its 2006 annual review EAD revised the TWF and POTW removal values used for sodium nitrite in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373), and the POTW removal is now 90 percent (formerly 1.85 percent). EAD also revised the TWF for nitrate compounds to better reflect the pollutant's properties. The TWF that EAD applies for nitrate compounds is now 0.000062 (formerly 0.000747). EPA also developed a TWF of 0.0032 for nitrate as N, a pollutant parameter reported only to PCS (formerly 0.0056 based on nitrate TWF). Table 15-6 shows the resulting changes in EPA's estimated sodium nitrite, nitrate compounds, and nitrate as N for the PMF Category.

**Table 15-6. Impact of Changes to TWF and POTW Percent Removal for the PMF Category**

| Database | Pollutant                 | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|---------------------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite            | 1   | 5,203                 | 0.92                  |
| TRI 2002 | Nitrate Compounds         | 10  | 13                    | 2,199                 |
| PCS 2002 | Nitrate as N <sup>a</sup> | 1   | 807                   | 109                   |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*; *PCSLoads2002\_v2*; *PCSLoads2002\_v4*.

<sup>a</sup>Total pounds of nitrate as N discharged decreased due to Innovia Films Inc. load corrections.

### 15.4.3 PMF Category 2006 Screening-Level Review

The results of the 2006 screening-level review are the TRI and PCS rankings after the revisions described in Section 4.2. This accounts for methodology changes described in Section 4.2 and changes made based on facility contacts. For the PMF Category, the most significant changes are also described in Sections 15.4.1 and 15.4.2. Table 15-7 shows the 2006 screening-level TWPE estimated for the PMF Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 15-7. PMF Category 2006 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| PMF                   | 20,838                     | 117,741                    | 111,409                    |

Source: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 15.4.4 PMF Category 2006 Pollutants of Concern

Table 15-8 presents the pollutants of concern for the PMF Category as part of the 2006 annual review. After the database corrections, carbon disulfide continues to be the top PMF Category pollutant, in terms of TWPE. Nitrate compounds discharges are now a pollutant of concern due to the increase in TWF. Sodium nitrite is no longer a pollutant of concern due to the decrease in TWF and increase in POTW percent removal. Nitrate as N is also no longer a pollutant of concern due to the decrease in TWF.

One facility, Sealed Air Corporation Cryovac Division, Simpsonville, SC, reported dioxin and dioxin-like compounds that contributed 34 percent of the category TRI TWPE for 2002 and 38 percent of the category TRI TWPE in 2003. Sealed Air Corporation Cryovac Division manufactures plastic wrap for fresh meats, cheeses, vegetables, and baked goods. Table 15-9 presents the discharges of dioxin and dioxin-like compounds for 2002 to 2004 for this facility. The total pounds discharged before POTW removal are presented because the facility is an indirect discharger. The facility's discharges of dioxin and dioxin-like compounds reported to TRI in 2004 are 91 percent lower than discharges reported to TRI in 2002.

Table 15-8. 2006 Annual Review: PMF Category Pollutants of Concern

| Pollutant                        | 2002 PCS <sup>a</sup>  |                       |               | 2002 TRI <sup>b</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |                |
|----------------------------------|--|-----------------------|---------------|--|-----------------------|----------------|--|-----------------------|----------------|
|                                  | Number of Facilities Reporting Pollutant                               | Total Pounds Released | TWPE          | Number of Facilities Reporting Pollutant                               | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                               | Total Pounds Released | TWPE           |
| Carbon Disulfide                 | 1  | 7,066                 | 19,785        | 6  | 28,626                | 80,157         | 6  | 23,223                | 65,028         |
| Dioxin and Dioxin-Like Compounds | Pollutants are not in the top five pollutants reported to PCS in 2002. |                       |               | 0.0015<br>(0.683 g)  | 33,452                | 33,452         | 1  | 0.0010<br>(0.474 g)   | 41,950         |
| Nitrate Compounds                |  |                       |               | 394,162  | 2,207                 | 2,207          | 10   | 392,646               | 2,199          |
| Lead and Lead Compounds          |  |                       |               | 274  | 614                   | 614            | 54   | 395                   | 886            |
| Formaldehyde                     |  |                       |               | 191,411  | 446                   | 446            | 4  | 198,355               | 462            |
| Magnesium                        | 1  | 188,815               | 163           | Pollutants are not in the top five pollutants reported to TRI in 2002. |                       |                | Pollutants are not in the top five pollutants reported to TRI in 2003. |                       |                |
| Copper                           | 3  | 217                   | 138           |  |                       |                |  |                       |                |
| Sulfate                          | 1  | 24,187,480            | 135           |  |                       |                |  |                       |                |
| Nitrogen, Ammonia                | 6  | 116,858               | 130           |  |                       |                |  |                       |                |
| <b>PMF Category Total</b>        | <b>9<sup>c</sup></b>   | <b>27,998,002</b>     | <b>20,838</b> | <b>153<sup>c</sup></b>   | <b>1,385,366</b>      | <b>117,741</b> | <b>159<sup>c</sup></b>   | <b>1,492,648</b>      | <b>111,409</b> |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*; *PCSLoads2002\_v4*.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

**Table 15-9. Sealed Air Corporation Cryovac Division Dioxin and Dioxin-Like Compounds Discharges**

| Year | Basis of Estimate             | Total Pounds (Grams)<br>Discharged to POTW | Total Pounds (Grams)<br>Discharged to Surface Water <sup>a</sup> | TWPE    |
|------|-------------------------------|--|--|---------|
| 2000 | Monitoring or<br>Measurements | 0.05005<br>(22.7)                          | 0.00851<br>(3.86)  | 288,065 |
| 2001 | Monitoring or<br>Measurements | 0.04321<br>(19.6)                          | 0.00735<br>(3.33)  | 213,739 |
| 2002 | Monitoring or<br>Measurements | 0.00886<br>(4.02)                          | 0.00151<br>(0.68)  | 33,457  |
| 2003 | Other                         | 0.00615<br>(2.79)                          | 0.00105<br>(0.47)  | 41,957  |
| 2004 | Monitoring or<br>Measurements | 0.00079<br>(0.36)                          | 0.00013<br>(0.06)  | 5,414   |

Source: Envirofacts.

<sup>a</sup>Discharges to surface water reflect the mass and TWPE estimated by EPA after POTW treatment (i.e., the removal of dioxin and dioxin-like compounds at the POTW is accounted for).

## 15.5 Regenerated Cellulose Products Discussion

In 2005, EPA reviewed the PMF Category and determined that carbon disulfide was the pollutant with the highest TWPE. In the TRI and PCS databases, carbon disulfide discharges come from facilities that manufacture regenerated cellulose products, such as cellophane, cellulosic sponge, and meat casings (U.S. EPA, 2005b). As a result, Section 15.5 focuses on facilities manufacturing regenerated cellulose products, and includes a process description, information about facilities that manufacture cellulose products, wastewater sources of carbon disulfide, and wastewater treatment at facilities that manufacture cellulose products.

### 15.5.1 Regenerated Cellulose Process Description

In 2000, EPA's Office of Air Quality Planning and Standards (OAQPS) completed a study of the cellulose products manufacturing facilities in support of the Cellulose Products Manufacturing NESHAP. The information gathered during the OAQPS study is summarized in the memorandum *Industry Profile of Cellulose Products Manufacturing Facilities in the U.S* (Schmidtke, 2000). The process description that follows is based on the description in this memorandum.

The viscose process is used to manufacture cellulose film, sponge, meat casings, and rayon. In the viscose process, sheets of dissolving-grade cellulose pulp are saturated with caustic to convert the cellulose into alkali cellulose. The alkali cellulose is pressed to remove the excess caustic and is shredded to increase the surface area for easier processing. After shredding, the alkali cellulose resembles "white crumbs." The alkali cellulose partially oxidizes and degrades by aging in ambient air. The aged alkali cellulose and gaseous carbon disulfide are mixed in a vessel to form sodium cellulose xanthate, resembling "yellow crumbs." The sodium cellulose xanthate is dissolved in aqueous caustic solution, creating the viscose solution. The viscose is ripened, filtered, degassed, and extruded prior to regeneration of the cellulose.

Regenerated cellulose is formed by adding sulfuric acid to the viscose solution (Schmidtke, 2000). The following reactions describe the basic viscose process:

1. **Alkali Cellulose**  
 $(C_6H_9O_4-OH)_x + NaOH \rightarrow (C_6H_9O_4-ONa)_x + H_2O$   
 Cellulose + Sodium Hydroxide  $\rightarrow$  Alkali Cellulose + Water
2. **Sodium Cellulose Xanthate**  
 $(C_6H_9O_4-ONa)_x + CS_2 \rightarrow (C_6H_9O_4-O-CS_2Na)_x$   
 Alkali Cellulose + Carbon Disulfide  $\rightarrow$  Sodium Cellulose Xanthate
3. **Viscose Solution**  
 $(C_6H_9O_4-O-CS_2Na)_x + NaOH + H_2O \rightarrow (C_6H_9O_4-O-CS_2Na)_x \cdot H_2O$   
 Sodium Cellulose Xanthate + Sodium Hydroxide + Water  $\rightarrow$  Viscose Solution
4. **Regenerated Cellulose**  
 $(C_6H_9O_4-O-CS_2Na)_x \cdot H_2O + H_2SO_4 \rightarrow (C_6H_9O_4-OH)_x + CS_2 + H_2S + S + H_2SO_4 + Na_2SO_4 + CO_2$   
 Viscose Solution + Sulfuric Acid  $\rightarrow$  Regenerated Cellulose + Carbon Disulfide + Hydrogen Sulfide + Sulfur + Sulfuric Acid + Sodium Sulphate + Carbon Disulfide

The manufacture of rayon, cellophane, and meat casings differ in the type of extrusion dye and the post-regeneration processing. Processes for each product type are described below.

- **Rayon fiber.** The viscose is extruded through a spinneret into a bath of sulfuric acid and zinc sulfate to regenerate the cellulose. After regeneration, the rayon fiber is washed, bleached, and lubricated with different chemicals depending on the desired product (Schmidtke, 2000).
- **Cellophane.** The viscose is extruded through a narrow slit to form a thin sheet, which passes through a sulfuric acid bath to regenerate the cellulose. A hot water bath, used to purify the cellophane, is followed by desulfurization, neutralization, bleaching, washing, and softening. The cellophane is then dried for packaging (Schmidtke, 2000).
- **Food casings.** The viscose is extruded through a circular dye or over a paper substrate as fibrous casing. The extruded viscose is contacted with sulfuric acid and sometimes ammonium sulfate, depending on the product, to regenerate the cellulose. The regenerated cellulose passes through wash tanks, including additional sulfuric acid and warm water. Glycerin is added to the food casings as a conditioner and dyes may be added as coloring for the casing prior to drying (Schmidtke, 2000).

The manufacture of cellulosic sponge differs slightly. The sheets of dissolving-grade pulp are converted into alkali cellulose, followed by xanthation into sodium cellulose xanthate and formation of the viscose solution. The viscose solution is then mixed with sodium sulphate crystals, other fibers, and dyes. The mixture is poured into a mold or extruded under high temperature to melt the sodium sulphate crystals, leaving the pores characteristic of sponges. The remaining processing of the cellulose sponges includes bleaching, washing, cutting, and possibly packaging. Some facilities that manufacture sponges do not make viscose and thus do not use carbon disulfide. Instead they purchase blocks of hardened viscose which they dissolve to form the softened viscose for processing (Schmidtke, 2000).

### **15.5.2 Regenerated Cellulose Facility Information**

EPA identified cellulose products manufacturers in the United States using the TRI and PCS databases and data from a study of the cellulose products manufacturing industry conducted by EPA's OAQPS during their development of NESHAP regulations (Schmidtke, 2000). Table 15-10 lists the eight U.S. cellulose products manufacturers.

Six of the facilities reported wastewater discharges of carbon disulfide to TRI in 2002 and 2003. Table 15-11 lists the total discharges for the regenerated cellulose facilities in *TRIReleases2002\_v4* and *TRIReleases2003\_v2*. Table 5-12 lists the discharges of carbon disulfide in *TRIReleases2002\_v4* and *TRIReleases2003\_v2*. Table 15-13 lists the total discharges in *PCSLoads2002\_v4*. The carbon disulfide TWF in the databases is 2.81, while the POTW removal used in the TRI databases is 84 percent.

Table 15-10. Cellulose Manufacturers in the United States

| TRI ID<br>(PCS ID)               | Facility Name           | Facility<br>Location    | Product Type          | Discharge<br>Type     | Permit Notes  |
|----------------------------------|-------------------------|-------------------------|-----------------------|-----------------------|---|
| 53821-MCMPN-217NO                | 3M Corporation          | Prairie du Chien,<br>WI | Cellulosic<br>Sponges | Indirect              | Does not report discharges to PCS. Does not report wastewater discharges to TRI after 2001. No permit available.  |
| 14150-GNRLM-305SA                | 3M Corporation          | Tonawanda, NY           | Cellulosic<br>Sponges | Indirect              | Does not report discharges to PCS. No permit available.   |
| 66542-FLXLN-6000S<br>(KS0003204) | Innovia Films<br>Inc.   | Tecumseh, KS            | Cellophane            | Direct                | Carbon disulfide monitoring required after activated sludge basin because it inhibits the biological process at concentrations above 35 mg/L. Must notify regulators if carbon disulfide exceeds 17.5 mg/L. |
| NR                               | Nylogene<br>Corporation | Elyria, OH              | Cellulosic<br>Sponges | NA                    | Does not report discharges to PCS. Does not report wastewater discharges to TRI. No permit available.   |
| 38402-SPNTX-SANTA                | Spontex Inc.            | Columbia, TN            | Cellulosic<br>Sponges | Direct                | Permit writer used OCPSF Subpart D – Thermoplastic Resins for BPT, but did not apply BAT because the facility produced less than 5 million lbs of product per year.   |
| 61832-TPKNC-915NM                | Teepak L.L.C.           | Danville, IL            | Meat Casings          | Indirect              | Facility only has a general storm water permit.   |
| 37774-VSKSC-EASTL<br>(TN0001457) | Viskase<br>Corporation  | Loudon, TN              | Meat Casings          | Indirect <sup>a</sup> | Permit limits are based on state regulations and treatability.  |
| 72370-VSKSC-RT198<br>(AR0036544) | Viskase<br>Corporation  | Osceola, AR             | Meat Casings          | Direct                | Facility is a minor discharge facility.   |

Source: Company Web Sites (Devro, Unknown; Innovia Films, 2004; Spontex, 2004; Viskase, 2002); *TRIRelases2002\_4*; *TRIRelases2003\_2*; Facility NPDES Permits (TDEC, 2002; IEPA, 2003; KDHE, 2001; ADEQ, 2000; TDEC, 2005); *Industry Profile of the Cellulose Products Manufacturing Facilities in the U.S.* (Schmidtke, 2000).

<sup>a</sup>EPA believes the facility is an indirect discharger because the facility reports POTW transfers and not surface water releases to TRI. PCS does not contain data for this facility, although they have a NPDES permit that expires in December 2006. EPA believes they began discharging only to a POTW sometime after 1991.

NA – Not available. EPA is unable to determine if these facilities are direct or indirect dischargers.

NR – Not reported. This facility does not report to TRI or PCS.

**Table 15-11. TRI 2002 and 2003 Discharges for Cellulose Products Manufacturing Facilities**

| Facility Name                      | TRI 2002                        |  |            | TRI 2003                        |  |            |
|------------------------------------|---------------------------------|--|------------|---------------------------------|--|------------|
|                                    | Total Pounds Discharged to POTW | Total Pounds Discharged to Stream <sup>a</sup> | Total TWPE | Total Pounds Discharged to POTW | Total Pounds Discharged to Stream <sup>a</sup> | Total TWPE |
| Viskase Corporation<br>Loudon, TN  | 77,279                          | 12,383   | 34,639     | 80,288                          | 12,865   | 35,987     |
| Innovia Films Inc.<br>Tecumseh, KS | NA                              | 17,300   | 20,596     | NA                              | 6,544  | 13,658     |
| Teepak L.L.C.<br>Danville, IL      | 57,600                          | 14,391   | 20,665     | 39,700                          | 12,922   | 11,255     |
| 3M Corporation<br>Tonawanda, NY    | 6,400                           | 1,024  | 2,867      | 6,200                           | 992  | 2,778      |
| Viskase Corporation<br>Osceola, AR | NA                              | 12,855   | 1,013      | NA                              | 9,622  | 862        |
| Spontex Inc.<br>Columbia, TN       | NA                              | 201  | 563        | NA                              | 234  | 655        |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

NA – Not applicable. These facilities are direct dischargers and do not report discharges to POTW.

**Table 15-12. TRI 2002 and 2003 Carbon Disulfide Discharges for Cellulose Products Manufacturing Facilities**

| Facility Name                      | TRI 2002                         |   |                       | TRI 2003                         |   |                       |
|------------------------------------|----------------------------------|---|-----------------------|----------------------------------|---|-----------------------|
|                                    | Carbon Disulfide Pounds Reported | Carbon Disulfide Pounds Released to Stream <sup>a</sup> | Carbon Disulfide TWPE | Carbon Disulfide Pounds Reported | Carbon Disulfide Pounds Released to Stream <sup>a</sup> | Carbon Disulfide TWPE |
| Viskase Corporation<br>Loudon, TN  | 77,000                           | 12,320  | 34,498                | 80,000                           | 12,800  | 35,842                |
| Innovia Films Inc.<br>Tecumseh, KS | NA                               | 7,350   | 20,581                | NA                               | 4,877   | 13,656                |
| Teepak L.L.C. Danville,<br>IL      | 46,100                           | 7,376   | 20,581                | 25,100                           | 4,016   | 11,245                |
| 3M Corporation<br>Tonawanda, NY    | 6,400                            | 1,024   | 2,867                 | 6,200                            | 922   | 2,778                 |
| Viskase Corporation<br>Osceola, AR | NA                               | 355   | 994                   | NA                               | 304   | 851                   |
| Spontex Inc. Columbia,<br>TN       | NA                               | 201   | 562                   | NA                               | 234   | 655                   |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

NA – Not applicable. These facilities are direct dischargers and do not report discharges to POTW.

**Table 15-13. PCS 2002 Discharges for Cellulose Products Manufacturing Facilities**

| Facility Name                    | Facility Location | PCS 2002                |            |
|----------------------------------|-------------------|-------------------------|------------|
|                                  |                   | Total Pounds Discharged | Total TWPE |
| Innovia Films Inc.               | Tecumseh, KS      | 26,021,647              | 20,372     |
| Viskase Corporation              | Osceola, AR       | 239,019                 | 152        |
| 3M Corporation                   | Tonawanda, NY     | NA                      | NA         |
| Spontex Inc.                     | Columbia, TN      | NR                      | NR         |
| Teepak L.L.C.                    | Danville, IL      | NA                      | NA         |
| Viskase Corporation <sup>a</sup> | Loudon, TN        | NA                      | NA         |

Source: *PCSLoads2002\_v4*.

<sup>a</sup>EPA believes the facility is an indirect discharger because the facility reports POTW transfers and not surface water releases to TRI. PCS does not contain data for this facility, although they have a NPDES permit that expires in December 2006. EPA believes they began discharging to a POTW sometime after 1991.

NA – Not applicable. These facilities are indirect dischargers and do not have PCS permits.

NR – Not reported. This facility is a minor direct discharger with a PCS permit, but discharges are not reported in Envirofacts.

### 15.5.3 Wastewater Sources of Carbon Disulfide

At cellulose products manufacturing facilities, the main wastewater sources of carbon disulfide include railcar unloading, carbon disulfide storage, and air pollution control (Schmidtke, 2000).

Carbon disulfide gas is delivered to most cellulose products facilities by railcar. Unloading the railcar requires it to be filled with water or nitrogen to displace the carbon disulfide into the storage tank. Facilities using water displacement generate carbon-disulfide-saturated wastewater during railcar unloading, which is sent to the facility's wastewater treatment system. Facilities using nitrogen displacement do not produce the carbon-disulfide-saturated wastewater during railcar unloading. EPA determined that Spontex Inc. was the only facility of the eight listed in Table 15-10 that uses water displacement during carbon disulfide unloading as of 2000 (Schmidtke, 2000).

Carbon disulfide storage tanks are typically submerged under water in a concrete-lined pool. This allows any carbon disulfide leaks to collect in the bottom of the pool to avoid atmospheric releases. In addition to the underwater storage, the tanks have a water or nitrogen padding system to further prevent the contact with oxygen. The padding is in direct contact with the carbon disulfide to fill the headspace in the tank, creating wastewater saturated with carbon disulfide if a water padding system is used. The water padding in the storage tank is displaced into the water pool when the storage tanks are filled. Displaced water in the pool and water padding is sent to the wastewater treatment system. As of 2000, EPA determined that, of the facilities listed in Table 15-10, only Teepak L.L.C., 3M Corporation Tonawanda, Spontex Inc, and Nylogene Corporation use a water padding system (Schmidtke, 2000).

Gaseous by-products in the regeneration of cellulose, including hydrogen sulfide and carbon disulfide, are off-gassed from the process equipment. Pollutants in the vented gas can be removed using a wet gas scrubber, which uses an aqueous solution to remove the air

pollutants. The wet scrubber removal efficiency for carbon disulfide is low but the scrubber effluent may contain some carbon disulfide (Schmidtke, 2000). Discharges reported by Innovia Films Inc. are due to wet scrubbing of the gaseous by-products (Martin, 2006).

#### 15.5.4 Regenerated Cellulose Facilities Wastewater Treatment

Table 15-14 summarizes the wastewater treatment known to be used by cellulose products manufacturing facilities.

**Table 15-14. Cellulose Products Facilities Wastewater Treatment**

| Product            | Number of Facilities | Pretreatment Used by Indirect Dischargers   | Treatment Used by Direct Dischargers  |
|--------------------|----------------------|---|---|
| Cellophane         | 1                    | NA  | Neutralization, settling, equalization, second neutralization, aeration, and clarification. |
| Food Casings       | 3                    | Neutralization, potential filtration and settling. Achieved CS <sub>2</sub> concentrations of 5-20 ppm. | Neutralization using lime, equalization, and clarification.                                 |
| Cellulosic Sponges | 4                    | Neutralization and oxidization  | Equalization, aeration, and clarification.  |

Source: *Industry Profile of the Cellulose Products Manufacturing Facilities in the U.S.* (Schmidtke, 2000).

#### 15.6 PMF Category Conclusions

- The high TWPE ranking for the PMF category is due primarily to carbon disulfide discharges from six cellulose products manufacturers. Excluding these discharges from the category reduces the combined PCS and TRI TWPE for 2002 by approximately 73 percent.
- One facility, Sealed Air Corporation Cryovac Division, reported discharges of dioxin and dioxin-like compounds to TRI in 2002 and 2003. The number of grams of dioxin and dioxin-like compounds discharges reported by the facility to TRI in 2004 are 91 percent less than was reported to TRI in 2002.
- The reduction of HAP emissions required by the NESHAP for the cellulose products manufacturing industry must be achieved no later than June 13, 2005. EPA predicted the NESHAP will likely reduce the amount of carbon disulfide wastewater discharges because facilities will convert from water to nitrogen displacement and padding systems. EPA also estimated that facilities will generate an additional 2.1 MGY from wet air pollution control. However, the wet air pollution control will not increase wastewater discharges of carbon disulfide because of their limited effectiveness for removing carbon disulfide. See 67 FR 40055 (June 11, 2002).

- Although wastewater discharges from cellulose products manufacturer are not covered by an existing ELG, permit writers are basing limitations on Part 463, Plastics Molding and Forming Point Source Category, and Part 414, Organic Chemicals, Plastics, and Synthetic Fibers. Neither Part 463 nor Part 414 includes limitations for carbon disulfide discharges.
- EPA identified that four of the eight facilities use water displacement during carbon disulfide unloading or water padding storage system in 2000 (Schmidtke, 2000). EPA believes using nitrogen displacement and padding instead of water will generate less carbon disulfide in the wastewater.
- Based on the 2006 annual review, EPA finds that national ELGS are not the best tools for establishing technology-based limits for this industrial category because most of the toxic and nonconventional pollutant discharges are from a few facilities in this industrial category. There are only eight facilities contributing the bulk of the TWPE for this category (four are direct discharges and two are indirect discharges) and EPA was not able to identify the discharge status of two facilities for the 2006 annual review. EPA will consider assisting permitting authorities in identifying pollutant control and pollution prevention technologies for the development of technology based effluent limitations based on BPJ on a facility-specific basis.

## 15.7 PMF References

ADEQ. 2000. Arkansas Department of Environmental Quality. National Pollution Discharge Elimination System Permit Application NPDES – AR0036544 – Viskase Corporation, Osceola, AR. Little Rock, AR. (Month, Day). DCN 02493.

Devro. Unknown. Product Availability. Available online at: <http://www.devro.plc.uk/products/index.htm>. Date accessed: June 22, 2005. DCN 02087.

IEPA. 2003. Illinois Environmental Protection Agency Division of Water Pollution Control. General NPDES Permit for Storm Water Discharges from Industrial Activities. Springfield, IL. DCN 02540.

Innovia Films. 2004. Company Profile. Available online at: <http://www.innoviafilms.com/corporate/profile.htm>. Date accessed: June 22, 2005. DCN 02088.

KDHE. 2006. Kansas Department of Health and Environment. Kansas Water Pollution Control Permit and Authorization to Discharge Under NPDES KS0003204 – Innovia Films, Tecumseh, KS. Topeka, KS. DCN 02581.

Martin, Tony. 2006. Telephone conversation with Tony Martin of Innovia Films Inc. and Jessica Wolford of Eastern Research Group, Inc. “Discussion of Carbon Disulfide Discharges for Innovia Films Inc. (KS0003204).” (April 27). DCN 03228.

Schmidtke, Karen and Thomas Holloway. 2000. *Industry Profile of the Cellulose Products Manufacturing Facilities in the U.S. Prepared for U.S. EPA National Emissions Standards for Hazardous Air Pollutants: Cellulose Products Manufacturing*. Cary, NC. (April 11). Docket EPA-HQ-OAR-2003-0193-0004.

Spontex. 2004. MAPA Spontex, Inc. Wiping Products. Available online at: <http://www.spontexusa.com/products.cfm?PRTID=1>. Date accessed: June 22, 2005. DCN 02092.

TDEC. 2002. Tennessee Department of Environment and Conservation. State of Tennessee National Pollutant Discharge Elimination System Permit NPDES TN0001457 – Viskase Corporation, Loudon, TN. Nashville, TN. DCN 02532.

TDEC. 2005. Tennessee Department of Environment and Conservation. State of Tennessee National Pollutant Discharge Elimination System Permit NPDES Permit TN0001571 – Spontex Inc., Columbia, TN. Nashville, TN. 2005. DCN 02533.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1984. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Plastics Molding and Forming Point Source Category*. EPA 440/1-84/069. Washington, DC. (December).

U.S. EPA. 1987. *Development Document for Effluent Limitations Guidelines and Standards for the Organic Chemical, Plastics, and Synthetic Fibers Point Source Category - Final*. EPA 440-1-87-009. Washington, DC. (October).

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

U.S. EPA. 2005c. *Product and Product Group Discharges Subject to Effluent Limitations and Standards for the Organic Chemicals, Plastics, and Synthetic Fibers Point Source Category - 40 CFR 414*. Washington, DC. DCN 01812.

Viskase. 2002. Viskase Companies, Inc. Viskase Casing Solutions Worldwide. Available online at: <http://www.viskase.com/>. Date accessed: June 22, 2005. DCN 02089.

## **16.0 PORCELAIN ENAMELING (40 CFR PART 466)**

EPA selected the Porcelain Enameling Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FR 51050, August 29, 2005). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the Porcelain Enameling Category. EPA's 2006 annual review builds on the 2005 annual review. As part of the 2006 annual review, EPA changed the classification of 174 of 188 facilities in the TRI 2002 and PCS 2002 databases from the Porcelain Enameling Category to the Metal Finishing Category (40 CFR Part 433). As a result of this change, EPA identified that the combined TRI and PCS 2002 TWPE for the Porcelain Enameling Category in the 2006 annual review is 99 percent less than the combined TWPE in the 2005 annual review. Consequently, the Porcelain Enameling Category is not identified as a hazard priority based on data available at this time.

### **16.1 Porcelain Enameling Category Background**

This section provides background on the Porcelain Enameling Category including a brief profile of the porcelain enameling industry and background on 40 CFR Part 466.

#### **16.1.1 Porcelain Enameling Industry Profile**

The porcelain enameling industry includes facilities that prepare the surface of a basis metal and apply a substantially vitreous or glassy inorganic coating bonded to the basis metal by fusion at a temperature above 800°F (PEI, Unknown). The coatings can be applied by spraying, dipping, or flow coating (U.S. EPA, 1982). Some of the facilities classified in the seven SIC codes listed in Table 16-1 conduct porcelain enameling operations. The Porcelain Enameling Category ELGs apply to the wastewater dischargers from these operations. Most facilities classified in the seven SIC codes listed in Table 16-1 do not conduct porcelain enameling operations, but conduct metal finishing operations. The Metal Finishing Category ELGs apply to the wastewater discharges from nonporcelain-enameling metal finishing operations, such as electroplating, etching and chemical milling, machining, galvanizing, and painting (U.S. EPA, 1983) (see 40 CFR Part 433.10(b)). EPA reviewed information about facilities in the SIC codes listed in Table 16-1 that reported wastewater discharges to TRI and PCS, to determine whether they conduct porcelain enameling operations.

**Table 16-1. Number of Facilities in Porcelain Enameling SIC Codes**

| SIC Code   | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> |
|--|---------------------------|-----------------------|-----------------------|
| 3431: Enameled Iron and Metal Sanitary Ware              | 80                        | 1                     | 4                     |
| 3469: Metal Stamping, NEC                                | 2,287                     | 1                     | 55                    |
| 3479: Coating, Engraving, and Allied Services, NEC       | 5,255                     | 8                     | 102                   |
| 3631: Household Cooking Equipment                        | 97                        | 0                     | 6                     |
| 3632: Household Refrigerators and Home and Farm Freezers | 23                        | 1                     | 6                     |
| 3633: Household Laundry Equipment                        | 18                        | 1                     | 7                     |
| 3639: Household Appliances, NEC                          | 1,536                     | 1                     | 4                     |
| <b>Total</b>   | <b>9,296</b>              | <b>13</b>             | <b>184</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Releases to water only.

NEC - Not elsewhere classified.

### 16.1.2 40 CFR Part 466

EPA first promulgated ELGs for the Porcelain Enameling Category on November 24, 1982 (47 FR 53184). All of the subcategories, except for Subpart D – Copper Basis Material, have BPT, BAT, NSPS, and PSES/PSNS limitations. Only NSPS and PSNS are established for the Copper Basis Material Subcategory. The priority pollutants chromium, lead, nickel, and zinc are regulated in all of the subcategories. This category consists of four subcategories, as shown in Table 16-2 with a description of the subcategories' applicability.

**Table 16-2. Porcelain Enameling Category Subcategory Applicability**

| Subpart | Subcategory Title        | Subcategory Applicability                       |
|---------|--------------------------|---|
| A       | Steel Basis Material     | Porcelain enameling on steel basis material     |
| B       | Cast Iron Basis Material | Porcelain enameling on cast iron basis material |
| C       | Aluminum Basis Material  | Porcelain enameling on aluminum basis material  |
| D       | Copper Basis Material    | Porcelain enameling on copper basis material    |

Source: *Porcelain Enameling Point Source Category - 40 CFR 466; Development Document for Effluent Limitations Guidelines and Standards for the Porcelain Enameling Point Source Category* (U.S. EPA, 1982).

### 16.2 Porcelain Enameling Category 2005 Annual Review

In 2005, EPA reviewed the Porcelain Enameling Category and determined that the majority of facilities identified by the SIC codes listed in Table 16-1 with data in the TRI and PCS databases did not perform porcelain enameling operations (U.S. EPA, 2005b; Wolford, 2005). As a result, instead of analyzing discharges from this category, the remainder of Section 16.0 focuses on identification of the facilities that are likely to have porcelain enameling operations that discharge wastewater subject to the Porcelain Enameling ELGs.

### 16.2.1 Porcelain Enameling Category 2005 Screening-Level Review

Table 16-3 presents the Porcelain Enameling Category TWPE calculated, using *TRIReleases2002\_v2* and *PCSLoads2002\_v2*.

**Table 16-3. Porcelain Enameling Category 2005 Screening-Level Review Results**

| Point Source Category | PCS TWPE <sup>a</sup> | TRI TWPE <sup>b</sup> | Total TWPE |
|-----------------------|-----------------------|-----------------------|------------|
| Porcelain Enameling   | 3,478                 | 88,749                | 92,228     |

Source: *2005 Annual Screening-Level Analysis* (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIReleases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 16.2.2 Porcelain Enameling Category 2005 Facility Classification Revisions

After the 2005 screening-level review, EPA conducted a detailed review of the category and determined that the Porcelain Enameling Category combined 2002 TRI and PCS TWPE discharges from many facilities that did not have porcelain enameling operations. EPA used information from individual company web sites (Wolford, 2005) and information provided by the main trade association for this industry, the Porcelain Enamel Institute, to determine which facilities were likely to conduct porcelain enameling operations (PEI, 2006). Facilities were assumed to have metal finishing operations, but not porcelain enameling operations, if their facility name contained any of the 46 metal finishing unit operations listed in 40 CFR Part 433.10(a) and they did not identify themselves as porcelain enamellers on their web site or manufacture products that could be porcelain enameled, such as kitchen appliances. EPA conducted additional review of facility web sites to determine if facilities performed metal finishing operations or porcelain enameling operations based on their products (Wolford, 2005). Table 16-4 presents the number of facilities in the seven SIC codes, separated into facilities likely to have porcelain enameling operations (Likely PE Facilities) and those with only metal finishing operations (Non-PE Facilities). The table includes only the facilities reporting wastewater discharges to TRI and facilities classified as major dischargers in PCS. EPA concluded that 92.6 percent of the facilities in the seven SIC codes are not likely to conduct porcelain enameling operations (U.S. EPA, 2005b).

**Table 16-4. 2005 Annual Review Results: Number of Facilities in Porcelain Enameling SIC Codes**

| SIC Code   | Likely Porcelain Enameling Facilities            |  | Non-Porcelain Enameling Facilities            |   |
|--|--|--|---|---|
|  | 2002 PCS <sup>a</sup><br>Likely PE<br>Facilities | 2002 TRI <sup>b</sup><br>Likely PE<br>Facilities | 2002 PCS <sup>a</sup><br>Non-PE<br>Facilities | 2002 TRI <sup>b</sup><br>Non-PE<br>Facilities |
| 3431: Enameled Iron and Metal Sanitary Ware              | 1  | 4  | 0   | 0   |
| 3469: Metal Stamping, NEC                                | 0  | 4  | 1   | 51  |
| 3479: Coating, Engraving, and Allied Services, NEC       | 0  | 0  | 8   | 102   |
| 3631: Household Cooking Equipment                        | 0  | 6  | 0   | 0   |
| 3632: Household Refrigerators and Home and Farm Freezers | 1  | 6  | 0   | 0   |
| 3633: Household Laundry Equipment                        | 1  | 7  | 0   | 0   |
| 3639: Household Appliances, NEC                          | 1  | 3  | 0   | 1   |
| <b>Total</b>   | <b>4<sup>c</sup></b>                             | <b>30<sup>c</sup></b>                            | <b>9</b>                                      | <b>154</b>                                    |

Source: *Preliminary Review of Priority Categories of Industrial Dischargers* (U.S. EPA, 2005b); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Releases to water only.

<sup>c</sup>There are 30 facilities likely to have porcelain enameling operations: 26 facilities report only to TRI, 1 facility reports only to PCS, and 3 facilities reported to TRI and PCS in 2002.

NEC - Not elsewhere classified.

PE – Porcelain Enameling.

### 16.2.3 Porcelain Enameling Category 2005 Revised Screening-Level Review

After identifying facilities likely to have porcelain enameling operations, EPA recalculated the category TWPE. Table 16-5 presents the recalculated TWPE. The table compares the number of facilities reporting discharges greater than zero, the pounds of pollutants discharged, and the estimated TWPE discharges for the facilities that are not likely to manufacture porcelain enameled products (Non-PE Facilities) and those that are (Likely PE Facilities). Approximately 42 percent of the TWPE for facilities in the porcelain enameling SIC codes is from facilities likely to have porcelain enameling operations (U.S. EPA, 2005b).

**Table 16-5. Porcelain Enameling Category 2005 Revised Screening-Level Review Results**

|  | <b>Number of Facilities Reporting TWPE Greater Than Zero</b> | <b>Total Pounds Discharged</b> | <b>TWPE</b>   |
|--|--|--------------------------------|---------------|
| <b>2002 Total</b>                          |  | <b>46,479,576</b>              | <b>92,228</b> |
| 2002 TRI Non-PE Facilities <sup>a</sup>    | 154  | 406,178                        | 49,395        |
| 2002 PCS Non-PE Facilities <sup>b</sup>    | 9  | 22,710,347                     | 3,450         |
| <b>2002 Total Non-PE Facilities</b>        |  | <b>23,116,525</b>              | <b>52,845</b> |
| 2002 TRI Likely PE Facilities <sup>a</sup> | 30   | 576,059                        | 39,348        |
| 2002 PCS Likely PE Facilities <sup>b</sup> | 4  | 38,322                         | 28            |
| <b>2002 Total Likely PE Facilities</b>     | <b>30<sup>c</sup></b>  | <b>614,381</b>                 | <b>39,376</b> |

Source: *Preliminary Review of Priority Categories of Industrial Dischargers* (U.S. EPA, 2005b); *TRIRelapses2002\_v2*; *PCSLoads2002\_v2*.

<sup>a</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>b</sup>Dischargers include major dischargers only.

<sup>c</sup>There are 30 facilities likely to have porcelain enameling operations: 26 facilities report only to TRI, 1 facility reports only to PCS, and 3 facilities reported to TRI and PCS in 2002.

PE – Porcelain Enameling.

### **16.3 Potential New Subcategories for the Porcelain Enameling Category**

EPA did not identify any potential new subcategories for the Porcelain Enameling Category.

### **16.4 Porcelain Enameling Category 2006 Annual Review**

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Porcelain Enameling Category. As shown in Table 16-5, during the 2005 annual review, EPA identified 30 facilities that could have operations subject to the Porcelain Enameling Category ELGs (U.S. EPA, 2005b). Of these 30 facilities, 26 report only to TRI, one reported only to PCS, and three reported to TRI and PCS in 2002 (U.S. EPA, 2005b). For the 2006 annual review, EPA further investigated the operations conducted at these facilities. In its comments on the *Preliminary Review of Priority Categories of Industrial Dischargers* (U.S. EPA, 2005b), the Porcelain Enamel Institute provided additional information about some of the facilities likely to perform porcelain enameling operations (PEI, 2005). The Porcelain Enamel Institute confirmed that 13 facilities reporting to TRI in 2002 and 2 facilities with 2002 discharge data in PCS have porcelain enameling operations. In addition, the Porcelain Enamel Institute identified the remaining facilities, 17 facilities reporting to TRI in 2002 and 2 facilities reporting to PCS in 2002, as facilities that do not have porcelain enameling operations. The Porcelain Enamel Institute identified one facility, Vitco Inc., reporting to TRI in 2002 that EPA had identified as not likely to have porcelain enameling operations. (PEI, 2005) Additional information about the facilities with porcelain enameling operations was provided by the Porcelain Enamel Institute during a meeting with EPA in March 2006 (Johnston, 2006). Table 16-6 lists EPA's findings about the 31 facilities identified in the 2006 screening-level review as likely to have porcelain enameling operations. EPA determined that only 14 of these facilities have porcelain enameling operations, and 2 of these facilities closed after 2003.

**Table 16-6. 2006 Screening-Level Review Results: Classification of Facilities in Porcelain Enameling and Metal Finishing Categories**

| Facility                                     | Location         | Data Sources | Applicable Category | Additional Facility Information, where Available   |
|--|------------------|--------------|---------------------|--|
| American Standard Inc.                       | Salem, OH        | TRI          | Porcelain Enameling | Manufactures bathroom fixtures.  |
| American Trim Superior Metal Prods. Div.     | Wapakoneta, OH   | TRI          | Metal Finishing     |  |
| Briggs Industries Incorporated               | Knoxville, TN    | PCS          | Porcelain Enameling | Mostly porcelain enameling operations.   |
| Electrolux Home Prods.                       | Springfield, TN  | TRI          | Porcelain Enameling | Powdered enamel and wet-process enamel, painting, and washing operations. Estimate 90% of wastewater is from metal finishing operations. |
| Electrolux Home Prods.                       | Webster City, IA | TRI          | Metal Finishing     |  |
| Electrolux Home Prods.                       | Jefferson, IA    | TRI          | Metal Finishing     |  |
| Eljer Plumbingware Inc.                      | Salem, OH        | TRI          | Metal Finishing     | Facility has closed.   |
| GE Appliances                                | Louisville, KY   | TRI          | Metal Finishing     |  |
| GE Co.                                       | Decatur, AL      | TRI          | Metal Finishing     |  |
| GE Co. GEA BPO L.L.C.                        | Bloomington, IN  | TRI          | Metal Finishing     |  |
| Hanson Porcelain Co. Inc.                    | Lynchburg, VA    | TRI          | Porcelain Enameling | Custom porcelain enameling facility. Majority of wastewater is from porcelain enameling.   |
| Kohler Co.                                   | Kohler, WI       | TRI          | Metal Finishing     |  |
| Kohler Co.                                   | Searcy, AR       | TRI          | Metal Finishing     |  |
| Kohler Co. Cast Iron Div.                    | Kohler, WI       | TRI          | Porcelain Enameling | Porcelain enameling process does not produce wastewater. Majority of facility's wastewater is from metal finishing operations.           |
| Maytag Appliances                            | Searcy, AR       | TRI          | Metal Finishing     |  |
| Maytag Appliances Amana Refrigeration Prods. | Amana, IA        | TRI & PCS    | Metal Finishing     |  |
| Maytag Florence Ops.                         | Florence, SC     | TRI          | Porcelain Enameling | Facility has closed.   |

Table 16-6 (Continued)

| Facility                     | Location         | Data Sources | Applicable Category | Additional Facility Information, where Available  |
|------------------------------|------------------|--------------|---------------------|---|
| Maytag Herrin Laundry Prods. | Herrin, IL       | TRI & PCS    | Metal Finishing     |   |
| Maytag Newton Laundry        | Newton, IA       | TRI          | Porcelain Enameling | Facility is in the process of closing. Previously, wastewater was 90% from metal finishing operations.  |
| Maytag P#1 Cleveland         | Cleveland, TN    | TRI          | Porcelain Enameling | Produces home cooking ranges and ovens. Estimate 90% of wastewater is from metal finishing operations.  |
| Maytag P#3 Cleveland         | Cleveland, TN    | TRI          | Porcelain Enameling | Estimate 95% of wastewater is from metal finishing operations.  |
| Roper Corp.                  | Lafayette, GA    | TRI          | Porcelain Enameling | Produces home cooking ranges and ovens. Estimate 90% of wastewater is from metal finishing operations.  |
| State Inds. Inc.             | Ashland City, TN | TRI & PCS    | Porcelain Enameling | Produces approximately 14,000 hot water heaters per day with enameled interiors. Estimate 50% of wastewater is from metal finishing operations. |
| Vitco Inc.                   | Nappanee, IN     | TRI          | Porcelain Enameling | Custom porcelain enameling facility. Majority of wastewater is from porcelain enameling.  |
| W.C. Wood Co. Inc.           | Ottawa, OH       | TRI          | Metal Finishing     |   |
| Whirlpool Corp.              | Evansville, IN   | TRI          | Metal Finishing     |   |
| Whirlpool Corp.              | Fort Smith, AR   | TRI          | Metal Finishing     |   |
| Whirlpool Corp.              | Findlay, OH      | TRI          | Metal Finishing     |   |
| Whirlpool Corp. Clyde        | Clyde, OH        | TRI          | Porcelain Enameling | Estimate 90% of wastewater is from metal finishing operations.  |
| Whirlpool Corp. Marion Div.  | Marion, OH       | TRI          | Metal Finishing     |   |
| Whirlpool Corp. Tulsa        | Tulsa, OK        | TRI          | Porcelain Enameling | Estimate 85% of wastewater is from metal finishing operations.  |

Source: “Comments of the Porcelain Enamel Institute” (PEI, 2005); “Meeting Minutes of EPA and Porcelain Enamel Institute (PEI) Discussion of PEI Comments on the Preliminary 2006 Effluent Guidelines Plan (29 March 2006)” (Johnston, 2006).

As a result of the 2006 screening-level review, EPA determined that the Porcelain Enameling Category ranked 44<sup>th</sup> of 49 categories in combined 2002 TRI and PCS TWPE. Table 16-7 presents the TRI and PCS discharges associated with the 14 facilities with porcelain enameling operations listed in Table 16-6. TRI and PCS discharges from these 14 facilities, including the two facilities that closed after 2003, represented 412 combined TWPE from *TRIRelases2002\_v4* and *PCSLoads2002\_v4*.

**Table 16-7. Porcelain Enameling Category 2006 Screening-Level Review Results**

| Data Source                | Number of Facilities Reporting TWPE Greater than Zero | Total Pounds Discharged | TWPE         |
|----------------------------|---|-------------------------|--------------|
| 2002 PCS <sup>a</sup>      | 2   | 22,943                  | 17.1         |
| 2002 TRI <sup>b</sup>      | 13  | 286,436                 | 398.3        |
| 2003 TRI <sup>b</sup>      | 12 <sup>c</sup>                                       | 70,743                  | 362.6        |
| <b>2002 Category Total</b> |   | <b>309,378</b>          | <b>412.4</b> |

Source: *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Vitco Inc. did not report to TRI in 2003.

## 16.5 Porcelain Enameling Category Conclusions

- The high TWPE ranking for the Porcelain Enameling Category in the 2005 annual review was due to including discharges from facilities without porcelain enameling operations. These facilities have the same SIC code as facilities that produce porcelain enameled products, but they only have metal finishing operations.
- Review of the Porcelain Enameling Category determined that only 14 facilities with discharges reported in TRI and/or PCS have porcelain enameling operations, including three that have closed or are in the process of closing.
- The 14 facilities with discharges subject to the Porcelain Enameling Category ELGs account for approximately 412 TWPE using combined TRI and PCS data from 2002.
- Improvements to porcelain enameling technology have reduced or eliminated the use of water in the process. For example, powder enameling is a water-free dry enameling process and the amount of cleaning, generating wastewater, has reduced due to new porcelain enamel glass compositions (Waggener, 2006).
- EPA is not identifying the Porcelain Enameling Category as a hazard priority based on data available at this time.

## 16.6 Porcelain Enameling Category References

Hackler, Cullen. 2006. Porcelain Enamel Institute. Email to Carey Johnston, U.S. EPA, from Cullen Hackler, Porcelain Enamel Institute. “Porcelain Enameling Industry Information.” (July 7). DCN 03230.

Johnston, Carey. 2006. U.S. EPA. Memorandum to Public Record for the Effluent Guidelines Program Plan 2005/2006. “Meeting Minutes of EPA and Porcelain Enamel Institute (PEI) Discussion of PEI Comments on the Preliminary 2006 Effluent Guidelines Plan (29 March 2006).” (March 29). DCN 03229.

PEI. 2005. Porcelain Enamel Institute. *Comments of the Porcelain Enamel Institute*. Docket EPA-HQ-OW-2004-0032-1072. (November).

PEI. 2006. Porcelain Enamel Institute. Available online at: <http://www.porcelainenamel.com>.

PEI. Unknown. Porcelain Enamel Institute. *Properties of Porcelain Enamel, Appearance Properties, Data Bulletin PEI 501*. Available online at: <http://www.porcelainenamel.com/pei501.htm>. DCN 02091.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1982. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Porcelain Enameling Point Source Category*. EPA-440/1-82/072. Washington, DC.

U.S. EPA. 1983. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Metal Finishing Point Source Category*. EPA-440/1-83/091. Washington, DC.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Priority Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

Wolford, Jessica. 2005. Eastern Research Group, Inc. Memorandum to 2006 Effluent Guidelines Program Plan Docket. “Identification of Facilities for the Porcelain Enameling Point Source Category.” (July 14). DCN 02195.

## **17.0 RUBBER MANUFACTURING (40 CFR PART 428)**

EPA selected the Rubber Manufacturing Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review, particularly discharges of sodium nitrite reported to TRI in 2002 (U.S. EPA, 2005b) (see Table V-1, 70 FR 51050, August 29, 2005). This section summarizes the 2005 annual review and also describes the results of EPA's 2006 annual review of the discharges associated with the Rubber Manufacturing Category. EPA's 2006 annual review builds on the 2005 annual review. After corrections to the TRI and PCS databases based on more detailed review and data collection, the Rubber Manufacturing Category is no longer one of the top categories in terms of TWPE.

### **17.1 Rubber Manufacturing Category Background**

This subsection provides a brief background on the Rubber Manufacturing Category including a brief profile of the rubber manufacturing industry and background on 40 CFR Part 428.

#### **17.1.1 Rubber Manufacturing Industry Profile**

The rubber manufacturing industry includes facilities that manufacture natural, synthetic, and reclaimed rubber. Manufactured rubber becomes finished goods through a variety of methods, such as molding, extruding, and fabricating (U.S. EPA, 1974a; U.S. EPA, 1974b). Because the U.S. Economic Census reports data by NAICS code, and TRI and PCS report data by SIC code, EPA reclassified the 2002 U.S. Economic Census data by equivalent SIC code. The facilities in SIC code 3069 do not translate directly to a NAICS code, and EPA could not determine the number of facilities in the 2002 U.S. Economic Census for SIC code 3069. Table 17-1 lists the seven SIC codes with operations in the Rubber Manufacturing Category.

Rubber manufacturing facilities discharge directly to surface water as well as to POTWs. Table 17-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of facilities reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting thresholds.

**Table 17-1. Number of Facilities in Rubber Manufacturing SIC Codes**

| SIC Code  | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 2822: Synthetic Rubber (Vulcanizable Elastomers)              | 157                       | 18                    | 34                    | 35                    |
| 3011: Tires and Inner Tubes                                   | 158                       | 23                    | 72                    | 69                    |
| 3021: Rubber and Plastics Footwear                            | 62                        | 0                     | 5                     | 6                     |
| 3052: Rubber and Plastics Hose and Belting                    | 260                       | 4                     | 72                    | 68                    |
| 3053: Gaskets, Packing, and Sealing Devices                   | 614                       | 4                     | 58                    | 56                    |
| 3061: Molded, Extruded, and Lathe-Cut Mechanical Rubber Goods | 608                       | 19                    | 70                    | 69                    |
| 3069: Fabricated Rubber Products, NEC                         | NA <sup>c</sup>           | 47                    | 216                   | 201                   |
| <b>Total</b>  | <b>&gt;1,859</b>          | <b>118</b>            | <b>527</b>            | <b>504</b>            |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

<sup>c</sup>Poor bridging between NAICS and SIC codes. Numbers of facilities could not be determined.

NA – Not applicable.

NEC - Not elsewhere classified.

**Table 17-2. Rubber Manufacturing Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code  | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 2822: Synthetic Rubber (Vulcanizable Elastomers)              | 7                               | 11                                | 0  | 15                           |
| 3011: Tires and Inner Tubes                                   | 8                               | 17                                | 25   | 22                           |
| 3021: Rubber and Plastics Footwear                            | 0                               | 1                                 | 0  | 4                            |
| 3052: Rubber and Plastics Hose and Belting                    | 3                               | 20                                | 14   | 35                           |
| 3053: Gaskets, Packing, and Sealing Devices                   | 1                               | 11                                | 3  | 43                           |
| 3061: Molded, Extruded, and Lathe-Cut Mechanical Rubber Goods | 5                               | 17                                | 8  | 40                           |
| 3069: Fabricated Rubber Products, NEC                         | 9                               | 49                                | 10   | 148                          |

Source: *TRIRelases2002\_v4*.

NEC – Not elsewhere classified.

## 17.1.2 40 CFR Part 428

EPA first promulgated ELGs for the Rubber Manufacturing Category (40 CFR Part 428) on February 21, 1974 (39 FR 6662). All 11 subcategories have BPT, BAT, NSPS, and PSNS limitations. The priority pollutants lead, chromium, and zinc are all regulated in at least one subcategory. Table 17-3 presents the subcategories, the related SIC codes, and descriptions of the subcategories' applicability (U.S. EPA, 1974a; U.S. EPA, 1974b).

**Table 17-3. Rubber Manufacturing Category Subcategory Applicability**

| Sub-part | Subcategory Title   | Related SIC Code(s)   | Subcategory Applicability  |
|----------|---|---|--|
| A        | Tire and Inner Tube Plants  | 3011: Tires and Inner Tubes   | Pneumatic tire and inner tube  |
| B        | Emulsion Crumb Rubber   | 2822: Synthetic Rubber (Vulcanizable Elastomers)  | Emulsion crumb rubber<br>excludes acrylonitrile butadiene rubber   |
| C        | Solution Crumb Rubber   | 2822: Synthetic Rubber (Vulcanizable Elastomers)  | Crumb rubber   |
| D        | Latex Rubber  | 2822: Synthetic Rubber (Vulcanizable Elastomers)  | Latex rubber   |
| E        | Small-Sized General Molded, Extruded, and Fabricated Rubber Plants  | 3021: Rubber and Plastics Footwear  | Molded, extruded, and fabricated rubber; foam rubber backing; rubber cement-dipped goods; and retreaded tires<br>Excludes latex-based products and textiles subject to 40 CFR Part 410 |
| F        | Medium-Sized General Molded, Extruded, and Fabricated Rubber Plants | 3052: Rubber and Plastics Hose and Belting<br>3053: Gaskets, Packing, and Sealing Devices       |  |
| G        | Large-Sized General Molded, Extruded, and Fabricated Rubber Plants  | 3061: Molded, Extruded, and Lathe-Cut Mechanical Goods<br>3069: Fabricated Rubber Products, NEC |  |
| H        | Wet Digestion Reclaimed Rubber                                      | 3069: Fabricated Rubber Products, NEC   | Wet digestion reclaimed rubber   |
| I        | Pan, Dry Digestion, and Mechanical Reclaimed Rubber                 | 3069: Fabricated Rubber Products, NEC   | Reclaimed rubber<br>Excludes wet digestion   |
| J        | Latex-Dipped, Latex-Extruded, and Latex-Molded Rubber               | 3069: Fabricated Rubber Products, NEC   | Latex-dipped, latex-extruded, and latex-molded rubber<br>Excludes textiles subject to 40 CFR Part 410  |
| K        | Latex Foam  | 3069: Fabricated Rubber Products, NEC   | Latex foam<br>Excludes textiles subject to 40 CFR Part 410   |

Source: *Rubber Manufacturing Point Source Category - 40 CFR 428; Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Fabricated and Reclaimed Rubber Segment of the Rubber Processing Point Source Category* (U.S. EPA, 1974a); *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Tire and Synthetic Segment of the Rubber Processing Point Source Category* (U.S. EPA, 1974b).  
NEC - Not elsewhere classified.

## 17.2 Rubber Manufacturing Category 2005 Annual Review

This subsection discusses EPA’s 2005 annual review of the Rubber Manufacturing Category including the screening-level review and category-specific review.

### 17.2.1 Rubber Manufacturing Category 2005 Screening-Level Review

Table 17-4 presents the Rubber Manufacturing Category TWPE calculated, using *TRIRelases2002\_v2* and *PCSLoads2002\_v2*.

**Table 17-4. Rubber Manufacturing Category 2005 Screening-Level Review Results**

| Rank | Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|------|-----------------------|----------------------------|----------------------------|------------|
| 9    | Rubber Manufacturing  | 2,386                      | 173,304                    | 175,690    |

Sources: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTW and account for POTW removals.

### 17.2.2 Rubber Manufacturing Category 2005 Pollutants of Concern

Table 17-5 shows the five pollutants with the highest TWPE in *TRIRelases2002\_v2*, as well as the five chemicals with the highest TWPE in *PCSLoads2002\_v2*. The top five pollutants account for approximately 99 percent of the Rubber Manufacturing Category’s 2002 combined TWPE.

## 17.3 Potential New Subcategories for the Rubber Manufacturing Category

EPA did not identify any potential new subcategories for the Rubber Manufacturing Category.

**Table 17-5. 2005 Annual Review: Rubber Manufacturing Category Pollutants of Concern**

| Pollutant                                  | 2002 PCS <sup>a</sup>   |                       |              | 2002 TRI <sup>b</sup>  |                       |                |
|--|---|-----------------------|--------------|--|-----------------------|----------------|
|  | Number of Facilities Reporting Pollutant                        | Total Pounds Released | TWPE         | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           |
| Sodium Nitrite                             | Pollutants are not in the top five PCS 2002 reported pollutants |                       |              | 12   | 316,929               | 118,320        |
| PACs                                       |   |                       |              | 4  | 500                   | 50,293         |
| 1,3-Butadiene                              |   |                       |              | 4  | 250                   | 1,208          |
| Zinc and Zinc Compounds                    |   |                       |              | 166  | 22,121                | 1,037          |
| Chlorine                                   |   |                       |              | 4  | 1,534                 | 781            |
| Benzidine                                  | 1   | 0.24                  | 677          | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                |
| Arsenic                                    | 2   | 115                   | 446          |  |                       |                |
| Acrylonitrile                              | 3   | 141                   | 320          |  |                       |                |
| Copper                                     | 8   | 266                   | 169          |  |                       |                |
| Vanadium                                   | 1   | 4,710                 | 165          |  |                       |                |
| <b>Rubber Manufacturing Category Total</b> | <b>20<sup>c</sup></b>   | <b>9,530,447</b>      | <b>2,386</b> | <b>220<sup>c</sup></b>   | <b>1,082,214</b>      | <b>173,304</b> |

Source: *PCSLoads2002\_v2*; *TRIRelases2002\_v2*.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

#### **17.4 Rubber Manufacturing Category 2006 Annual Review**

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Rubber Manufacturing Category. EPA obtained additional data and identified:

- Errors in how PCS loads were estimated for one facility; and
- Changes in estimates of TWPE for sodium nitrite.

After EPA made the changes identified during the 2006 annual review, the TWPE in the TRI and PCS databases is less than 5,000 TWPE for the entire category.

##### **17.4.1 Rubber Manufacturing Category Facility Discharge Revisions**

EPA contacted Michelin North America's Ardmore Plant, which reported PACs to TRI in 2002 as discharges to surface water. The facility indicated that the PACs were not released to surface water, but were actually transferred to a landfill. Michelin North America's Ardmore Plant plans to make a correction to previously submitted TRI reports (Dryden, 2005). To accurately reflect the actual discharges, EPA deleted the discharges of PACs reported to TRI in 2002 by this facility, resulting in a decrease of 6,747 pounds of PACs.

### 17.4.2 Rubber Manufacturing Category TWF and POTW Percent Removal Revisions

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF and POTW removal values used for sodium nitrite, the TWF for nitrate compounds, and the POTW removal for chlorine in the TRI and PCS databases. During the 2006 annual review, EAD revised the TWF and POTW percent removal values used for sodium nitrite in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373), and the POTW removal is now 90 percent (formerly 1.85 percent). According to facilities EPA contacted, rubber facilities that use a molten salt curing process may discharge sodium nitrite. The molten salt, which can contain sodium nitrite, is removed from the rubber products using a water wash that is discharged (Dryden, 2005; Hines, 2005; Hough, 2005; Rader, 2005). EAD also revised the TWF for nitrate compounds to better reflect the pollutant's properties. The TWF that EAD applies for nitrate compounds is now 0.000747 (formerly 0.000062). Additionally, EAD revised the POTW removal values used for chlorine in the TRI database to better reflect the water chemistry of chlorine. The POTW removal is now 100 percent (formerly 1.87 percent). Table 17-6 presents the loads before and after corrections to the sodium nitrite TWF and POTW percent removal, nitrate compounds TWF, and chlorine POTW percent removal for the Rubber Manufacturing Category. Based on the changes described above, the sodium nitrite TWPE dropped by 99 percent and is no longer a pollutant of concern.

**Table 17-6. Impact of Changes to TWF and POTW Percent Removal for the Rubber Manufacturing Category**

| Database | Pollutant         | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|-------------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite    | 12  | 118,320               | 22                    |
| TRI 2002 | Nitrate Compounds | 20  | 43                    | 521                   |
| TRI 2002 | Chlorine          | 4   | 781                   | 406                   |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*.

### 17.4.3 Rubber Manufacturing Category 2006 Screening-Level Review

The results of the 2006 screening-level review are the TRI and PCS rankings after the revisions described in Section 4.2. This accounts for methodology changes described in Section 4.2 and changes made based on contacts to facilities. For the Rubber Manufacturing Category, the most significant changes are also described in Sections 17.4.1 and 17.4.2. Table 17-7 shows the 2006 screening-level TWPE estimated for the Rubber Manufacturing Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 17-7. Rubber Manufacturing Category 2006 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Rubber Manufacturing  | 2,350                      | 5,104                      | 4,395                      |

Sources: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTW and account for POTW removals.

#### 17.4.4 Rubber Manufacturing Category 2006 Pollutants of Concern

Table 17-8 presents the pollutants of concern for the Rubber Manufacturing Category as part of the 2006 annual review. Sodium nitrite is no longer a top pollutant of concern due to the decrease in TWF and increase in POTW percent removal. With the revised TWPE, the Rubber Manufacturing Category is no longer ranked high in terms of TWPE.

#### 17.5 Rubber Manufacturing Category Conclusions

- The high TWPE ranking for the Rubber Manufacturing Category in the 2005 annual review was due to discharges of sodium nitrite reported to TRI. EPA changed the sodium nitrite TWF and POTW percent removal to better reflect the chemistry in water, and therefore sodium nitrite is no longer a top pollutant of concern
- After EPA revised the TRI and PCS databases, the facilities with discharges subject to the Rubber Manufacturing ELGS account for 7,454 TWPE using combined TRI and PCS data from 2002.
- EPA is not identifying the Rubber Manufacturing Category as a hazard based on data available at this time.

Table 17-8. 2006 Annual Review: Rubber Manufacturing Category Pollutants of Concern

| Pollutant                                  | 2002 PCS <sup>a</sup>   |                       |              | 2002 TRI <sup>b</sup>  |                       |              | 2003 TRI <sup>b</sup>  |                       |              |
|--|---|-----------------------|--------------|--|-----------------------|--------------|--|-----------------------|--------------|
|  | Number of Facilities Reporting Pollutant  | Total Pounds Released | TWPE         | Number of Facilities Reporting Pollutant                               | Total Pounds Released | TWPE         | Number of Facilities Reporting Pollutant                               | Total Pounds Released | TWPE         |
| 1,3-Butadiene                              | These pollutants are not reported in the top five PCS 2002 reported pollutants. |                       |              | 4  | 250                   | 1,208        | 2  | 65                    | 316          |
| Zinc and Zinc Compounds                    |   |                       |              | 164  | 21,870                | 1,025        | 154  | 18,401                | 863          |
| Lead and Lead Compounds                    |   |                       |              | 48   | 249                   | 558          | 47   | 258                   | 579          |
| Nitrate Compounds                          |   |                       |              | 20   | 697,523               | 521          | 18   | 625,824               | 467          |
| Chlorine                                   |   |                       |              | 4  | 798                   | 406          | 2  | 555                   | 283          |
| Benzidine                                  | 1   | 0.24                  | 667          | These pollutants are not in the top five TRI 2002 reported pollutants. |                       |              | These pollutants are not in the top five TRI 2003 reported pollutants. |                       |              |
| Arsenic                                    | 1   | 115                   | 466          |  |                       |              |  |                       |              |
| Acrylonitrile                              | 2   | 141                   | 320          |  |                       |              |  |                       |              |
| Copper                                     | 7   | 266                   | 169          |  |                       |              |  |                       |              |
| Vanadium                                   | 1   | 4,710                 | 165          |  |                       |              |  |                       |              |
| <b>Rubber Manufacturing Category Total</b> | <b>20<sup>c</sup></b>   | <b>9,530,447</b>      | <b>2,350</b> | <b>218<sup>c</sup></b>   | <b>770,616</b>        | <b>5,104</b> | <b>203<sup>c</sup></b>   | <b>727,211</b>        | <b>4,395</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include major dischargers only.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

## 17.6 Rubber Manufacturing Category References

Dryden, Bob. 2005. Telephone conversation with Bob Dryden of GDX Automotive, New Haven, MO, and Jessica Wolford of Eastern Research Group, Inc. “Clarification of Manufacturing Process and Pollutant Discharges.” (June 13). DCN 02071.

Hines, John. 2005. Telephone conversation with John Hines of Avon Automotive, Cadillac, MI, and Jessica Wolford of Eastern Research Group, Inc. “Clarification of Manufacturing Process and Pollutant Discharges.” (June 9). DCN 02070.

Hough, Mike. 2005. Telephone conversation with Mike Hough of GDX Automotive, Wabash, IN, and Jessica Wolford of Eastern Research Group, Inc. “Clarification of Manufacturing Process and Pollutant Discharges.” (June 22). DCN 02072.

Johnston, Carey. 2006. U.S. EPA. Memorandum to Public Record for the Effluent Guidelines Program Plan 2005/2006. “November 10, 2005, Meeting Between EPA and Rubber Manufacturers.” (February 8). DCN 03227.

Rader, Stacey. 2005. Telephone conversation with Stacey Rader of Cooper Standard Automotive, Bowling Green, OH, and Jessica Wolford of Eastern Research Group, Inc. “Clarification of Manufacturing Process and Pollutant Discharges.” (June 20). DCN 02069.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1974a. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Fabricated and Reclaimed Rubber Segment of the Rubber Processing Point Source Category*. EPA-440/1-74/030-a. Washington, DC.

U.S. EPA. 1974b. *Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Tire and Synthetic Rubber Segment of the Rubber Processing Point Source Category*. EPA-440/1-74-013-a. Washington, DC.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers*. EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

## 18.0 TEXTILE MILLS (40 CFR PART 410)

EPA selected the Textile Mills (Textiles) Category for additional data collection and analysis because of the high TWPE identified in the 2005 screening-level review (see Table V-1, 70 FR 51050, August 29, 2005). The 2004 Plan summarizes the results of EPA's previous reviews of this industry (U.S. EPA, 2004). This section summarizes the 2005 annual review and also describes EPA's 2006 annual review of the discharges associated with the Textiles Category (U.S. EPA, 2005b). EPA's 2006 annual review builds on the 2005 annual review. EPA identified facilities contributing the most TWPE as part of the 2006 annual review.

### 18.1 Textile Mills Point Source Category Background

This subsection provides background on the Textiles Category including a brief industry profile of the textiles industry and background on 40 CFR Part 410.

#### 18.1.1 Textiles Industry Profile

The Textiles Category includes facilities that manufacture and process textile materials, such as carpets, broad woven fabrics, and knitwear. It also includes facilities using wet processes, such as scouring, dyeing, finishing, printing, and coating, that discharge contact wastewater. These facilities are classified under SIC major group 22: Textile Mill Products. EPA is considering adding three SIC codes from major group 23: Apparel and Other Finished Products Made from Fabrics and Other Similar Materials as potential new subcategories of the Textiles Category, as discussed in Section 18.4. Table 18-1 lists the SIC major groups with operations in the Textiles Category.

**Table 18-1. Number of Facilities in Textiles SIC Major Groups**

| SIC Major Group   | 2002 U.S. Economic Census | 2002 PCS <sup>a</sup> | 2002 TRI <sup>b</sup> | 2003 TRI <sup>b</sup> |
|---|---------------------------|-----------------------|-----------------------|-----------------------|
| 22: Textile Mill Products   | 14,519                    | 145                   | 284                   | 289                   |
| <b>Potential New Subcategories</b>  |                           |                       |                       |                       |
| 23: Apparel and Other Finished Products Made from Fabrics and Other Similar Materials | 27,295                    | 0                     | 16                    | 16                    |

Source: U.S. Economic Census, 2002 (U.S. Census, 2002); *PCSLoads2002\_v2*; *TRIRelases2002\_v2*; *TRIRelases2003\_v2*.

<sup>a</sup>Major and minor dischargers.

<sup>b</sup>Releases to any media.

Textile manufacturers discharge directly to surface water as well as to POTWs. Table 18-2 presents the types of discharges reported by facilities in the 2002 TRI database. The majority of mills reporting to TRI reported no water discharges, but facilities may be discharging pollutants in wastewater at levels below the TRI-reporting threshold.

**Table 18-2. Textiles Category Facilities by Type of Discharge Reported in TRI 2002**

| SIC Major Group   | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|---|---------------------------------|-----------------------------------|--|------------------------------|
| 22: Textile Mill Products   | 15                              | 64                                | 8  | 183                          |
| <b>Potential New Subcategories</b>  |                                 |                                   |  |                              |
| 23: Apparel and Other Finished Products Made from Fabrics and Other Similar Materials | 1                               | 4                                 | 0  | 11                           |

Source: *TRIRelases2002\_v4*.

### 18.1.2 40 CFR Part 410

EPA first promulgated ELGs for the Textiles Category (40 CFR Part 410) on September 2, 1982 (47 FR 38819). There are nine subcategories, all of which have BPT, BAT, and NSPS limitations. Some subcategories also have PSES and PSNS limitations. Table 18-3 lists the nine subcategories, their related SIC codes, and applicability. Table 18-4 lists the regulated pollutants for the subcategories. Section 5.4.5 of the 2004 TSD provides more information on the regulatory background for the Textiles Category (U.S. EPA, 2004).

**Table 18-3. Applicability of Subcategories in the Textiles Category**

| <b>Subpart</b> | <b>Subpart Name</b>      | <b>Applicable SIC Code(s)</b>  | <b>Subpart Applicability</b>   |
|----------------|--------------------------|--|--|
| A              | Wool Scouring            | 2299   | Wool scouring, topmaking, and general cleaning of raw wool   |
| B              | Wool Finishing           | 2231   | Wool finishers, including carbonizing, fulling, dyeing, bleaching, rinsing, fireproofing, and other such similar processes   |
| C              | Low Water Use Processing | 2211, 2221, 2231, 2241, 2253, 2254, 2259, 2273, 2281, 2282, 2284, 2295, 2296, 2298 | Yarn manufacture, yarn texturizing, unfinished fabric manufacture, fabric coating, fabric laminating, tire cord and fabric dipping, and carpet tufting and carpet backing  |
| D              | Woven Fabrics Finishing  | 2261, 2262   | Woven fabric finishers, which may include any or all of the following unit operations: desizing, bleaching, mercerizing, dyeing, printing, resin treatment, water proofing, flame proofing, soil repellency application and a special finish application               |
| E              | Knit Fabric Finishing    | 2251, 2252, 2257, 2258   | Knit fabric finishers, which may include any or all of the following unit operations: bleaching, mercerizing, dyeing, printing, resin treatment, water proofing, flame proofing, soil repellency application and a special finish application                          |
| F              | Carpet Finishing         | 2273   | Carpet mills, which may include any or all of the following unit operations: bleaching, scouring, carbonizing, fulling, dyeing, printing, resin treatment, waterproofing, flameproofing, soil repellency, looping, and backing with foamed and unfoamed latex and jute |
| G              | Stock & Yarn Finishing   | 2269   | Stock or yarn dyeing or finishing, which may include any or all of the following unit operations and processes: cleaning, scouring, bleaching, mercerizing, dyeing and special finishing   |
| H              | Nonwoven Manufacturing   | 2297   | Facilities that primarily manufacture nonwoven textile products of wool, cotton, or synthetics, singly or as blends, by mechanical, thermal, and/or adhesive bonding procedures  |
| I              | Felted Fabric Processing | 2299   | Facilities that primarily manufacture nonwoven products by employing fulling and felting operations as a means of achieving fiber bonding  |

Source: *Textile Mills Point Source Category - 40 CFR 410; Development Document for Effluent Limitations Guidelines and Standards for the Textile Mills Point Source Category* (U.S. EPA, 1979).

**Table 18-4. Pollutants Regulated by Existing Textiles ELGs**

| Subpart | Subcategory                          | BPT   | BAT                                   | NSPS  |
|---------|--------------------------------------|---|---------------------------------------|---|
| A       | Wool Scouring <sup>a</sup>           | BOD <sub>5</sub> , COD, TSS, Oil & Grease, Sulfide, Phenols, Total Chromium, pH | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| B       | Wool Finishing <sup>a</sup>          | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| C       | Low Water Use Processing             | BOD <sub>5</sub> , COD, TSS, pH   | COD                                   | BOD <sub>5</sub> , COD, TSS, pH                                   |
| D       | Woven Fabrics Finishing <sup>a</sup> | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| E       | Knit Fabric Finishing <sup>a</sup>   | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| F       | Carpet Finishing <sup>a</sup>        | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| G       | Stock & Yarn Finishing <sup>a</sup>  | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| H       | Nonwoven Manufacturing               | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |
| I       | Felted Fabric Processing             | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH               | COD, Sulfide, Phenols, Total Chromium | BOD <sub>5</sub> , COD, TSS, Sulfide, Phenols, Total Chromium, pH |

Source: *Textile Mills Point Source Category – 40 CFR Part 410.*

<sup>a</sup>Subcategories with wet processing.

## 18.2 Textiles Category 2005 Annual Review

This subsection discusses EPA’s 2005 annual review of the Textiles Category including the screening-level review and category-specific review.

### 18.2.1 Textiles Category 2005 Screening-Level Review

Table 18-5 presents the Textiles Category TWPE, using *TRIReleases2002\_v2* and *PCSLoads2002\_v2*. Table 18-5 includes discharges from facilities in SIC codes EPA determined are potential new subcategories of the Textiles Category. The estimated TWPE from *PCSLoads2002\_v2* far exceeds the TWPE from *TRIReleases2002\_v2*.

**Table 18-5. Textiles Category 2005 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | Total TWPE |
|-----------------------|----------------------------|----------------------------|------------|
| Textiles Category     | 124,085                    | 32,765                     | 156,850    |

Source: 2005 Annual Screening-Level Analysis (U.S. EPA, 2005a); *PCSLoads2002\_v2*; *TRIReleases2002\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 18.2.2 Textiles Category 2005 Pollutants of Concern

Table 18-6 shows the top five pollutants with the highest TWPE in *TRIReleases2002\_v2*, as well as the top five pollutants with the highest TWPE in *PCSLoads2002\_v2*. Sulfide contributed 59 percent of the category PCS TWPE in 2002, while chlorine contributed approximately 25 percent of the TRI TWPE in 2002.

**Table 18-6. 2005 Annual Review: Textiles Category Pollutants of Concern**

| Pollutant                      | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |               |
|--------------------------------|--|-----------------------|----------------|--|-----------------------|---------------|
|                                | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE          |
| Sulfide                        | 66   | 26,013                | 72,874         | Pollutant is not in the top five TRI 2002 reported pollutants.   |                       |               |
| Chlorine                       | 32   | 59,576                | 30,334         | 4  | 25,316                | 12,890        |
| Arsenic                        | 5  | 3,989                 | 16,123         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |               |
| Toxaphene                      | 1  | 0.046                 | 1,393          |  |                       |               |
| Copper and Copper Compounds    | 33   | 1,854                 | 1,177          | 10   | 909                   | 577           |
| Sodium Nitrite                 | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 2  | 44,711                | 16,692        |
| Chlorine Dioxide               |  |                       |                | 1  | 4,613                 | 738           |
| Naphthalene                    |  |                       |                | 1  | 22,000                | 349           |
| <b>Textiles Category Total</b> | <b>74<sup>c</sup></b>  | <b>77,500,000</b>     | <b>124,085</b> | <b>90<sup>c</sup></b>  | <b>311,615</b>        | <b>32,765</b> |

Source: PCSLoads2002\_v2; TRIReleases2002\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

### 18.3 Potential New Subcategories for the Textiles Category

EPA reviewed industries with SIC codes not clearly subject to existing ELGs. EPA concluded the processes, operations, wastewaters, and pollutants discharged by facilities in the SIC codes listed in Table 18-7 are similar to those of the Textiles Category. These SIC codes fall under the major SIC major group 23: Apparel and Other Finished Products Made from Fabrics and Similar Materials. Some apparel manufacturing activities may be similar to textile mill processes, such as bleaching, dyeing, printing, and other finish applications. Table 18-7 shows the total TRI and PCS combined TWPE for each SIC code that is a potential new subcategory. As shown in the table, the discharges for the potential new subcategory SIC codes contribute a negligible percentage to the total Textiles Category TWPE.

**Table 18-7. Pollutant Loadings From Potential New Subcategories for the Textile Category**

| SIC Code                                 | 2005 Annual Review Combined TRI and PCS TWPE | Percentage of Total Category TWPE |
|--|--|-----------------------------------|
| 2322: Men's & Boys Underwear & Nightwear | 2.55   | 0.002                             |
| 2396: Automotive Trimmings, Apparel      | 0.12   | <0.001                            |
| 2399: Fabricated Textile Products, NEC   | 0.08   | <0.001                            |

Source: TRIReleases2002\_v2; PCSLoads2002\_v2.

NEC - Not elsewhere classified.

## 18.4 Textiles Category 2006 Annual Review

Following EPA's 2005 annual review, EPA continued to review the accuracy of the data in the PCS and TRI databases for the Textiles Category. EPA obtained additional data and identified changes in estimates of TWPE for sodium nitrite and chlorine.

### 18.4.1 Textiles Category TWF and POTW Percent Removal Revisions

As described in Table 4-1 in Section 4.2, during its 2006 annual review, EAD revised the TWF and POTW percent removal values for sodium nitrite and the POTW percent removal value for chlorine in the TRI and PCS databases to better reflect the pollutant's properties. The TWF that EAD applies for sodium nitrite is now 0.0032 (formerly 0.373), and the POTW percent removal is now 90 percent (formerly 1.95 percent). The POTW percent removal that EAD applies for chlorine is now 100 percent (formerly 1.87 percent). Table 18-8 presents the loads before and after corrections to the sodium nitrite TWF and POTW percent removal and the chlorine POTW percent removal for the Textiles Category.

**Table 18-8. Impact of Changes to TWF and POTW Percent Removal for the Textiles Category**

| Database | Pollutant      | Number of Facilities Reporting Discharges | TWPE from 2005 Review | TWPE from 2006 Review |
|----------|----------------|---|-----------------------|-----------------------|
| TRI 2002 | Sodium Nitrite | 2   | 16,692                | 2.96                  |
| TRI 2002 | Chlorine       | 4   | 12,890                | 552                   |

Sources: *TRIReleases2002\_v2*; *TRIReleases2002\_v4*.

### 18.4.2 Textiles Category 2006 Screening-Level Review

The results of the 2006 screening-level review are the TRI and PCS rankings after the revisions described in Section 4.2. This accounts for methodology changes described in Section 4.2. For the Textiles Category, the most significant changes are also described in Section 16.4.1. Table 18-9 shows the 2006 screening-level TWPE estimated for the Textiles Category from the 2002 and 2003 TRI and 2002 PCS databases.

**Table 18-9. Textiles Category 2006 Screening-Level Review Results**

| Point Source Category | 2002 PCS TWPE <sup>a</sup> | 2002 TRI TWPE <sup>b</sup> | 2003 TRI TWPE <sup>b</sup> |
|-----------------------|----------------------------|----------------------------|----------------------------|
| Textiles              | 123,494                    | 3,709                      | 3,447                      |

Source: *PCSLoads2002\_v4*; *TRIReleases2002\_v4*; *TRIReleases2003\_v2*.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

### 18.4.3 Textiles Category Pollutants of Concern

Table 18-10 presents the pollutants of concern for the Textiles Category based on the 2006 annual review.

Table 18-10. 2006 Annual Review: Textiles Category Pollutants of Concern

| Pollutant                       | 2002 PCS <sup>a</sup>  |                       |                | 2002 TRI <sup>b</sup>  |                       |              | 2003 TRI <sup>b</sup>                    |                       |              |
|---------------------------------|--|-----------------------|----------------|--|-----------------------|--------------|--|-----------------------|--------------|
|                                 | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE         | Number of Facilities Reporting Pollutant | Total Pounds Released | TWPE         |
| Sulfide                         | 39   | 26,013                | 72,874         | Pollutant is not in the top five TRI 2002 reported pollutants.   |                       |              |  |                       |              |
| Chlorine                        | 23   | 59,576                | 30,334         | 4  | 1,085                 | 552          | 3  | 1,019                 | 519          |
| Arsenic                         | 2  | 3,989                 | 16,123         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |              |  |                       |              |
| Toxaphene                       | 1  | 0.046                 | 1,393          |  |                       |              |  |                       |              |
| Copper and Copper Compounds     | 25   | 1,854                 | 1,177          | 10   | 909                   | 577          | 11                                       | 1,124                 | 713          |
| Chlorine Dioxide                | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |                | 1  | 4,613                 | 738          | 1  | 4,515                 | 722          |
| Naphthalene                     |  |                       |                | 1  | 22,000                | 349          | 1  | 11,000                | 175          |
| Chromium and Chromium Compounds |  |                       |                | 9  | 4,464                 | 338          | 9  | 3,175                 | 240          |
| <b>Textiles Category Total</b>  | <b>69<sup>c</sup></b>  | <b>77,497,564</b>     | <b>123,494</b> | <b>92<sup>c</sup></b>  | <b>243,597</b>        | <b>3,709</b> | <b>92<sup>c</sup></b>                    | <b>451,147</b>        | <b>3,447</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include only major dischargers.

<sup>b</sup>Discharges include transfers to POTWs and account for POTW removals.

<sup>c</sup>Number of facilities reporting TWPE greater than zero.

#### 18.4.4 Textiles Category Sulfide Discharges

EPA reviewed the sulfide discharges from textile mills reporting to PCS in 2002. Part 410 regulates discharges of sulfide from textile mills, and 39 textile mills report sulfide discharges to PCS. Table 18-11 lists the 15 mills that contribute the most sulfide TWPE for the category. Together, they account for 90 percent of the sulfide TWPE in PCS for textile mills.

**Table 18-11. Top Facilities Reporting Sulfide Discharges in *PCSLoads2002\_v4***

| Facility Name                         | Location          | 2002 Flow (MGY) | Pounds of Sulfide | Sulfide TWPE |
|---------------------------------------|-------------------|-----------------|-------------------|--------------|
| Mohawk Industries                     | Lyerly, GA        | 569             | 4,841             | 13,561       |
| Galey & Lord/Society Hill             | Society Hill, SC  | 1,371           | 3,837             | 10,749       |
| Chargeurs Wool (USA), Inc.            | Jamestown, SC     | 75              | 3,300             | 9,245        |
| Avondale Mills                        | Sylacauga, AL     | 535             | 1,699             | 4,761        |
| Kenyon Industries                     | Shannock, RI      | 129             | 1,604             | 4,493        |
| Eflex LLC Eflex WWTP                  | Lawndale, NC      | 48              | 1,511             | 4,233        |
| Cramerton Eagle Road                  | Cramerton, NC     | 371             | 1,293             | 3,622        |
| Gold Mills, Inc                       | Pine Grove, PA    | 132             | 1,141             | 3,197        |
| King America Fishing                  | Dover, GA         | 476             | 901               | 2,525        |
| Rabun Apparel, Inc.                   | Rabun Gap, GA     | 505             | 765               | 2,143        |
| Westpoint Stevens                     | Clemson, SC       | 635             | 690               | 1,933        |
| Plains Cotton Cooperative Association | New Braunfels, TX | 128             | 545               | 1,526        |
| Jockey International                  | Carlisle, KY      | 58              | 530               | 1,486        |
| Interface Fabrics Group Finish        | East Douglas, MA  | 65              | 421               | 1,180        |
| Velcorex                              | Orangeburg, SC    | 218             | 314               | 880          |

Source: *PCSLoads2002\_v4*.

For the four facilities with the largest sulfide discharges, EPA obtained detailed PCS data, including concentrations, for 2002 to 2006. Together, these four facilities account for more than 50 percent of the category's sulfide TWPE. Table 18-12 lists EPA's findings from PCS concentration data. Concentration data were available for two of these four facilities. One mill reported detecting sulfide in 8 of 14 samples (57 percent). The other mill reported detecting sulfide in 8 of 48 samples (17 percent).

**Table 18-12. Concentration Data Available for Top Four Facilities Reporting Sulfide Discharges in *PCSLoads2002* for the Textiles Category**

| Facility Name              | Location         | Date Range         | Concentration Data Summary |                 |                          |
|----------------------------|------------------|--------------------|----------------------------|-----------------|--------------------------|
|                            |                  |                    | Range (mg/L)               | Number Detected | Total Number Data Points |
| Mohawk Industries          | Lyerly, GA       | 9/30/02 – 1/31/06  | NA <sup>a</sup>            | NA <sup>a</sup> | NA <sup>a</sup>          |
| Galey & Lord/Society Hill  | Society Hill, SC | 5/31/02 – 2/28/06  | <0.038 – 2.1               | 8               | 48                       |
| Chargeurs Wool (USA), Inc. | Jamestown, SC    | 12/31/02 – 1/31/05 | <1.0 – 6                   | 7               | 14                       |
| Avondale Mills             | Sylacauga, AL    | 4/30/02 – 1/31/06  | NA <sup>a</sup>            | NA <sup>a</sup> | NA <sup>a</sup>          |

Source: Envirofacts; *PCSLoads2002\_v4*.

<sup>a</sup>Only quantity data are available in PCS.

NA – Not available.

#### 18.4.5 Textiles Category Chlorine Discharges

EPA reviewed the chlorine discharges from textile mills reporting to PCS in 2002. Part 410 does not regulate discharges of chlorine from textile mills; however, 32 textile mills report chlorine discharges to PCS (9 report discharges greater than zero). Table 18-13 lists the 23 mills with chlorine discharges greater than zero in *PCSLoads2002\_v4*. One facility, Burlington Industries in Cordova, NC, accounts for 87 percent of the category chlorine TWPE.

EPA obtained detailed PCS data for the Burlington Industries Cordova, NC mill, as well as its NPDES permit (NCDENR, 2004). Table 18-14 summarizes the chlorine concentrations, as reported in PCS for 2002, and the chlorine limitations in the Burlington permit. The chlorine concentrations appear to be misreported as mg/L for certain months, instead of µg/L, which is a consistent pattern for data from the years 2000 through 2005. As a result, EPA will verify these chlorine discharges as part of its 2007 review of industrial discharges with existing regulations and correct the PCS database accordingly. Also, the permitted chlorine limitation of 28 µg/L is a daily maximum value that took effect in March 2006, and the facility's current discharges of chlorine are likely lower than the values for 2002 summarized in Table 18-14.

**Table 18-13. Facilities With Largest Chlorine Discharges in PCSLoads2002\_v4**

| Facility Name                        | Location          | Pounds of Chlorine | Chlorine TWPE |
|--------------------------------------|-------------------|--------------------|---------------|
| Burlington Industries Richmond       | Cordova, NC       | 51,606             | 26,276        |
| Pharr Yarns Inc.                     | McAdenville, NC   | 1,679              | 855           |
| Cramerton Eagle Road WWTP            | Cramerton, NC     | 1,575              | 802           |
| Interface Fabrics Group S Inc. IF    | Elkin, NC         | 1,267              | 645           |
| Springs Industries/Grace Complex     | Lancaster, SC     | 785                | 400           |
| Burlington Industries LCC            | Hurt, VA          | 671                | 342           |
| Spring Industries, Inc.              | Griffin, GA       | 486                | 247           |
| Glen Touch Yarn Company LLC          | Altamahaw, NC     | 401                | 204           |
| Rabun Apparel, Inc.                  | Rabun Gap, GA     | 253                | 129           |
| Chargeurs Wool (USA) Inc.            | Jamestown, SC     | 192                | 98            |
| Westpoint Stevens/Clemson Plant      | Clemson, SC       | 181                | 92            |
| Dan River Inc. – Schoolfield         | Danville, VA      | 177                | 90            |
| Lees Carpets                         | Glasgow, VA       | 89                 | 45            |
| Mohawk Industries/Rocky River Plant  | Calhoun Falls, SC | 67                 | 34            |
| BBA Fiberweb/Bethune                 | Bethune, SC       | 64                 | 33            |
| Burlington Industries BM             | Clarksville, VA   | 28                 | 14            |
| West Pt Stevens Inc Wagram Plant     | Wagram, VA        | 21                 | 11            |
| Deroyal Textiles                     | Camden, NC        | 15                 | 8             |
| Kawashima Textile USA Inc.           | Lugoff, SC        | 14                 | 7             |
| Guilford Mills Inc. Gulford E Mills  | Kenansville, SC   | 2                  | 1             |
| Schneider Mills Inc. Schneider Mills | Taylorsville, NC  | 2                  | 1             |
| Cone Mills Corp. Cliffside Plant     | Cliffside, NC     | 1                  | 0             |
| CCX Fiberglass Products Division     | Walterboro, SC    | 1                  | 0             |

Source: PCSLoads2002\_v4.

**Table 18-14. Chlorine Limitations and PCS Concentration Data for Burlington Industries  
Cordova, NC Textile Mill**

| Outfall  | Chlorine Limit (ug/L)                             | Flow Limit (MGD)   | Concentrations As Reported in PCS |            |         | Units in PCS | Date       |
|--|---|--------------------|-----------------------------------|------------|---------|--------------|------------|
|  |   |                    | Mean                              | Minimum    | Maximum |              |            |
| 001:<br>Wastewater<br>treatment<br>plant<br>effluent | 28 (Daily<br>Maximum,<br>Effective<br>March 2006) | 1.2                | 73.3                              | 40         | 80      | mg/L         | 1/31/2002  |
|  |   |                    | 56.7                              | 40         | 80      | ug/L         | 2/28/2002  |
|  |   |                    | 66.7                              | 60         | 80      | mg/L         | 3/31/2002  |
|  |   |                    | 74.3                              | 60         | 80      | ug/L         | 4/30/2002  |
|  |   |                    | 64.3                              | 40         | 80      | mg/L         | 5/31/2002  |
|  |   |                    | 68.3                              | 60         | 80      | ug/L         | 6/30/2002  |
|  |   |                    | 62.7                              | 40         | 80      | mg/L         | 7/31/2002  |
|  |   |                    | 65.8                              | 50         | 80      | mg/L         | 8/31/2002  |
|  |   |                    | 50.8                              | 30         | 80      | mg/L         | 9/30/2002  |
|  |   |                    | 52.7                              | 40         | 70      | ug/L         | 10/31/2002 |
|  |   |                    | 54.2                              | 50         | 60      | ug/L         | 11/30/2002 |
| 50.8   | 40  | 60                 | mg/L                              | 12/31/2002 |         |              |            |
| 002:<br>Cooling<br>water                             | 28 (Daily<br>Maximum,<br>Effective<br>March 2006) | Monitoring<br>Only | 20.0                              | 20         | 20      | mg/L         | 1/31/2002  |
|  |   |                    | 10.0                              | 10         | 10      | mg/L         | 2/28/2002  |
|  |   |                    | 20.0                              | 20         | 20      | ug/L         | 3/31/2002  |
|  |   |                    | 40.0                              | 40         | 40      | ug/L         | 4/30/2002  |
|  |   |                    | 20.0                              | 20         | 20      | ug/L         | 5/31/2002  |
|  |   |                    | 20.0                              | 20         | 20      | ug/L         | 6/30/2002  |
|  |   |                    | 20.0                              | 20         | 20      | mg/L         | 7/31/2002  |
|  |   |                    | 20.0                              | 20         | 20      | mg/L         | 8/31/2002  |
|  |   |                    | 30.0                              | 30         | 30      | ug/L         | 9/30/2002  |
|  |   |                    | 20.0                              | 20         | 20      | ug/L         | 10/31/2002 |
|  |   |                    | 20.0                              | 20         | 20      | ug/L         | 11/30/2002 |
| 10.0   | 10  | 10                 | ug/L                              | 12/31/2002 |         |              |            |

Source: Envirofacts; Permit to Discharge Wastewater Under the National Pollution Discharge Elimination System NPDES NC0043320 – Burlington Industries, Inc., Cordova, NC (NCDENR, 2004).

---

## 18.5 Textiles Category Conclusions

- The Textiles Category was selected for additional review because of high TWPE in the PCS databases.
- Discharges of sulfide account for 59 percent of the category PCS TWPE. EPA reviewed PCS concentration data for sulfide discharges from the four textile mills with the highest TWPE, but only two had concentration data available. At these two mills, the data show concentrations ranging from levels below laboratory detection limits to 6 mg/L. For PCS data from 2002 to 2005, sulfide was detected above sample detection limits only 57 and 17 percent of the time.
- Discharges of chlorine account for 25 percent of the category PCS TWPE, and one facility accounts for 87 percent of the category chlorine TWPE: Burlington Industries in Cordova, NC. EPA reviewed the Burlington facility's permit and detailed PCS data and identified a likely error in the units in which chlorine concentrations are reported in PCS.
- EPA had incomplete data available for a full analysis. Specifically, further EPA review of this category will include acquiring additional concentration data from PCS for sulfide discharges, reviewing sulfide permit limitations, comparing current discharge concentrations and production-normalized loads, and considering if additional wastewater treatment would control sulfide discharges.

## 18.6 Textiles Category References

NCDENR. 2004. North Carolina Department of Environment and Natural Resources. Permit to Discharge Wastewater Under the National Pollution Discharge Elimination System NPDES NC0043320 – Burlington Industries, Inc., Cordova, NC. Raleigh, NC. (August 9). DCN 03980.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1979. *Development Document for Effluent Limitations Guidelines and Standards for the Textile Mills Point Source Category*. EPA-440/1-79/022b. Washington, DC.

U.S. EPA. 1996. *Preliminary Study of the Textile Mills Category*. Washington, DC. EPA-HQ-OW-2003-0074-0616. DCN 00484.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source*

*Categories for Effluent Limitations and Standards.* EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2005b. *Preliminary Review of Prioritized Categories of Industrial Dischargers.* EPA-821-B-05-004. Washington, DC. (August). DCN 02175.

**PART III: REVIEW OF INDUSTRIAL DISCHARGES  
NOT COVERED BY CATEGORICAL REGULATIONS**

## 19.0 REVIEW OF INDIRECT DISCHARGERS WITHOUT CATEGORICAL PRETREATMENT STANDARDS TO IDENTIFY POTENTIAL NEW CATEGORIES FOR PRETREATMENT STANDARDS

To identify candidates for categorical pretreatment standards under CWA sections 304(g) and 307(b), EPA reviewed eight industries that are composed entirely or almost entirely of indirect discharge facilities and that are not currently subject to categorical pretreatment standards. Table 19-1 lists the industries EPA reviewed (in alphabetical order), which were identified using stakeholder comments and pollutant discharge information.

**Table 19-1. Industries Included in EPA's 2006 Review of Possible New Candidates for Categorical Pretreatment Standards**

| No. | Industry                                 |
|-----|--|
| 1.  | Food Service Establishments              |
| 2.  | Health Services Industry                 |
| 3.  | Independent and Stand-Alone Laboratories |
| 4.  | Industrial Container and Drum Cleaning   |
| 5.  | Industrial Laundries                     |
| 6.  | Photoprocessing                          |
| 7.  | Printing and Publishing                  |
| 8.  | Tobacco Products                         |

### 19.1 Overview of EPA's 2006 Review of Possible New Candidates for Categorical Pretreatment Standards

As noted in 40 CFR §403.2, the three principal objectives of the National Pretreatment Program are to: (1) prevent the wide-scale introduction of pollutants into POTWs that will interfere with POTW operations, including use or disposal of municipal sludge; (2) prevent the introduction of pollutants into POTWs that will pass through the treatment works or will otherwise be incompatible with the treatment works; and (3) improve opportunities to recycle and reclaim municipal and industrial wastewaters and sludges (U.S. EPA, 1999).

All indirect dischargers are subject to general pretreatment standards (40 CFR 403), which includes a prohibition on discharges causing pass through or interference. See 40 CFR 403.5. The general pretreatment standards are implemented in the form of local limits developed either by POTWs with approved pretreatment programs, or POTWS that have experienced interference or pass through. In the United States, there are approximately 1,500 POTWs with approved pretreatment programs and 13,500 small POTWs that are not required to develop and implement pretreatment programs.

In addition, EPA establishes technology-based national regulations, termed "categorical pretreatment standards," for categories of industries discharging pollutants to POTWs that may pass through, interfere with or otherwise be incompatible with POTW operations. These are analogous to effluent limitations guidelines for direct dischargers. Generally, categorical pretreatment standards are designed such that wastewaters from direct and

indirect industrial dischargers are subject to similar levels of treatment. To date, EPA has promulgated such categorical pretreatment standards for 35 industrial categories.

The CWA also establishes review requirements for categorical pretreatment standards. Section 307(b) requires EPA to revise its categorical pretreatment standards for indirect dischargers “from time to time, as control technology, processes, operating methods, or other alternatives change.” Section 304(g) requires EPA to annually review these categorical pretreatment standards and revise them “if appropriate.” Although section 307(b) only requires EPA to review existing categorical pretreatment standards “from time to time,” section 304(g) requires an annual review. Therefore, EPA meets its 304(g) and 307(b) review requirements by reviewing all industrial categories subject to existing categorical pretreatment standards on an annual basis to identify potential candidates for revision. EPA conducts its annual review of existing categorical pretreatment standards concurrent with its review of existing effluent guidelines. These reviews are detailed in Sections 5.0-18.0 of this TSD.

Finally, the CWA also requires EPA to promulgate pretreatment standards for categories of dischargers that discharge pollutants not susceptible to treatment by POTWs or that would interfere with the operation of POTWs. However, it does not provide a timing requirement for the promulgation of such new pretreatment standards. EPA, in its discretion, periodically evaluates indirect dischargers not subject to categorical pretreatment standards to identify potential candidates for new pretreatment standards.

The remainder of this section discusses and provides results of EPA’s evaluation of categories of indirect dischargers not currently subject to categorical pretreatment standards.

## **19.2 EPA’s Evaluation of "Pass Through Potential" of Toxic and Nonconventional Pollutants through POTW Operations**

Categorical pretreatment standards are designed to prevent the discharge of pollutants that “interfere with, pass through, or otherwise [are] incompatible with” the operation of POTWs. See 33 U.S.C. § 1371(b)(1). In establishing pretreatment standards, Congress had two objectives: (1) that standards for indirect dischargers be equivalent to standards for direct dischargers, and (2) that the treatment capability and performance of POTWs be recognized and taken into account in regulating the discharge of pollutants from indirect dischargers. EPA’s approach in establishing categorical pretreatment standards is consistent with both objectives.

Historically, for most categorical pretreatment standard rulemakings, EPA determines the “pass through potential” by comparing the percentage of the pollutant removed by well-operated POTWs achieving secondary treatment with the percentage of the pollutant removed by wastewater treatment options that EPA is evaluating as the bases for categorical pretreatment standards. See 46 FR 9408 (January 28, 1981). If the median percentage removed by well-operated POTWs is less than the median percentage removed by direct discharging facilities using BAT, then EPA generally deems the pollutant to “pass through” and develops pretreatment standards for facilities that indirectly discharge the pollutant.

For some of the industries evaluated in this review (i.e., ICDC and Tobacco Products industries), EPA evaluated pass through potential using the traditional method mentioned above. Specifically, EPA compared each industry’s “current loadings” to the “potential post-regulatory loadings.” Current loadings are the pollutant loadings discharged to surface waters, accounting for POTW removals. Potential post-regulatory loadings are the pollutant loadings that would be discharged to surface waters upon compliance with pretreatment standards based on the BAT. EPA relied on wastewater sampling data and site visits to characterize the toxic pollutant discharges from both industries. Sections 19.5 and 19.9 discuss EPA’s data collection and analyses in more detail.

However, for the remaining six categories, EPA was unable to gather the data needed for a comprehensive analysis of the availability and performance (e.g., percentage of the pollutants removed) of treatment or process technologies that might reduce toxic pollutant discharges beyond that of technologies already in place at these facilities. Instead, EPA evaluated the "pass through potential" as measured by the total annual TWPE discharged by the industrial sector and the average TWPE discharge among facilities that discharge to POTWs. EPA relied on data from TRI, PCS, state pretreatment programs, industry trade groups, and contacts made to facilities to characterize toxic pollutant discharges from these six industries.

EPA relied on a similar evaluation of pass through potential in its prior decision not to promulgate national categorical pretreatment standards for the Industrial Laundries industry. See August 18, 1999 (64 FR 45071). EPA noted in this 1999 final action that, “While EPA has broad discretion to promulgate such [national categorical pretreatment] standards, EPA retains discretion not to do so where the total pounds removed do not warrant national regulation and there is not a significant concern with pass through and interference at the POTW.” See 64 FR 45077 (August 18, 1999).

EPA solicited comment on this evaluation for determining the "pass through potential" for industrial categories comprised entirely or nearly entirely of indirect dischargers. See 70, FR 51054 (August 29, 2005). In response to this solicitation, EPA only received two comments on this methodology and both comments were supportive of EPA’s approach (see OW-2004-0032-1042, 1051).

### **19.3 EPA’s Evaluation of “Interference Potential” of Industrial Indirect Discharges**

For each of the eight industries in this review, EPA evaluated the “interference potential” of the indirect industrial discharges. The term “interference” means a discharge which, alone or in conjunction with a discharge or discharges from other sources: (1) inhibits or disrupts the POTW, its treatment processes or operations, or its sludge processes, use or disposal; and (2) therefore is a cause of a violation of any requirement of the POTW’s NPDES permit (including an increase in the magnitude or duration of a violation) or of the prevention of sewage sludge use or disposal in compliance with applicable regulations or permits. See 40 CFR 403.3(i). To determine the interference potential, EPA generally evaluates the industrial indirect discharges in terms of: (1) the compatibility of industrial wastewaters and domestic wastewaters (e.g., type of pollutants discharged in industrial wastewaters compared to pollutants typically found in domestic wastewaters); (2) concentrations of pollutants discharged in industrial

wastewaters that might cause interference with the POTW collection system (e.g., fats, oil, and grease (FOG) discharges causing blockages in the POTW collection system, hydrogen sulfide corrosion in the POTW collection system), the POTW treatment system (e.g., high ammonia mass discharges inhibiting the POTW treatment system, high oil and grease mass discharges can also promote the growth of filamentous bacteria that inhibit the performance of POTWs using trickling filters), or biosolids disposal options; and (3) the potential for variable pollutant loadings to cause interference with POTW operations (e.g., batch discharges or slug loadings from industrial facilities interfering with normal POTW operations).

EPA relied on readily available information from the literature and stakeholders to evaluate the severity, duration, and frequency of interference incidents caused by industrial indirect discharges. As part of its evaluation, EPA reviewed data from its report to Congress on one type of interference incidents, blockages in the POTW collection system leading to combined sewer overflows (CSOs) and sanitary sewer overflows (SSOs) (U.S. EPA, 2004b).

EPA received comments from stakeholders during its review indicating that even with current authority provided in the general pretreatment regulations, some POTWs have difficulty controlling interference from some categories of indirect industrial dischargers (see OW-2004-0032-0020, 1090). EPA notes, however, that to a large extent, interference problems vary from POTW to POTW. Pollutants that interfere with the operation of one POTW may not adversely affect the operation of another. These differences are attributable to several factors including the varying sensitivities of different POTWs and the constituent composition of wastewater collected and treated by the POTW. See 46 FR 9406 (January 28, 1981).

EPA also notes that the national pretreatment program already provides the necessary regulatory tools and authority to local pretreatment programs for controlling interference problems – e.g., categorical pretreatment standards (40 CFR Parts 405-471) and general pretreatment standards (40 CFR 403). Under the provisions of Part 403.5(c)(1) & (2), in defined circumstances, a POTW must establish specific local limits for industrial users to guard against interference with the operation of the municipal treatment works. See 46 FR 9406 (January 28, 1981). Consequently, pretreatment programs must correct interference incidents with enforcement and oversight activities. The interference incidents identified by commenters do not necessarily indicate the need for additional categorical pretreatment standards, but they may indicate the need for additional oversight and enforcement.

#### **19.4 Category-Specific Evaluations**

Stakeholder comments and pollutant discharge information have helped EPA to identify industries that are composed entirely or nearly entirely of indirect dischargers. EPA has grouped these industries into the following eight possible new categories: Food Service Establishments; Industrial Laundries; Photoprocessing; Printing and Publishing; Independent and Stand-Alone Laboratories; Industrial Container and Drum Cleaning; Tobacco Products, and Health Services Industry. EPA is including within the Health Services Industry the following activities: Independent and Stand Alone Medical and Dental Laboratories, Offices and Clinics of Doctors of Medicine, Offices and Clinics of Dentists, Nursing and Personal Care Facilities, Veterinary Care Services, and Hospitals and Clinics. Data sources for these reviews include

TRI, PCS<sup>16</sup>, EPA reports and studies, periodicals and textbooks, EPA pretreatment coordinators and permitting authorities, and industry-supplied information. The following sections (19.5 through 19.12) summarize the information obtained for each industry reviewed. Table 19-2 below summarizes EPA's conclusions for each industry reviewed and provides the sources of detailed discussions of the industry reviews.

## **19.5            Food Service Establishments**

Food service establishments include facilities that prepare meals, snacks, and beverages to customer order for immediate on-premises and off-premises consumption. EPA reviewed wastewater discharges from the Food Service Establishments industry because of comments received in response to the 2004 Final Plan and the Preliminary 2006 Plan. This section briefly discusses EPA's findings on the Food Service Establishments industry.

### **19.5.1            Comments Received**

In response to the 2004 Plan, the Metropolitan Council Environmental Services (MCES) raised concerns about the interferences caused by FOG discharges from food service establishments (OW-2003-0074-0670), and the NRDC included food service establishments in a list of industries that it believes meet the criteria of Section 304(m)(1)(B) and therefore should have been identified for an effluent guidelines rulemaking (OW-2003-0074-0733). In response to the 2006 Preliminary Plan, two POTWs and the National Association of Clean Water Agencies (NACWA) submitted comments that categorical pretreatment standards are not necessary for the Food Service Establishments industry (OW-2004-0032-1042, 1086, 1078, 1093).

### **19.5.2            Industry Profile**

Food Service Establishments include facilities in SIC codes 5812, Eating Places, and 5813, Drinking Places. Of the approximately 509,000 food service establishments (approximately 460,000 eating places and 48,900 drinking places) in the United States, only 57 reported discharges to PCS in 2000 (all minor dischargers). The direct discharge facilities in the 2000 PCS represent 0.01 percent of the industry, supporting the likelihood that most food establishments are indirect dischargers. No food establishments reported to TRI in 2000 (Matuszko, 2005a).

---

<sup>16</sup> Although PCS only contains information for direct dischargers, this information can be useful in gaining some understanding of the types of discharges from a particular industry.

**Table 19-2. Summary of EPA’s 2006 CWA Sections 304(g) and 307(b) Review**

| <b>No.</b> | <b>Industry</b>                          | <b>Type of Pass Through Evaluation</b> | <b>Determination</b>   | <b>Section Including Summarized Industry Review Information</b> | <b>Source of Detailed Information</b> |
|------------|--|--|--|---|---------------------------------------|
| 1.         | Food Service Establishments              | Abbreviated                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.5  | DCN 02103                             |
| 2.         | Health Services Industry                 | Abbreviated                            | Not enough information: Conduct detailed study                             | Section 19.6  | DCN 02293                             |
| 3.         | Independent and Stand-Alone Laboratories | Abbreviated                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.7  | DCN 02101                             |
| 4.         | Industrial Container and Drum Cleaning   | Traditional                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.8  | DCN 03415                             |
| 5.         | Industrial Laundries                     | Abbreviated                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.9  | DCN 02102                             |
| 6.         | Photoprocessing                          | Abbreviated                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.10   | DCN 02096                             |
| 7.         | Printing and Publishing                  | Abbreviated                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.11   | DCN 02294                             |
| 8.         | Tobacco Products                         | Traditional                            | Low pass through potential: Categorical pretreatment standards unwarranted | Section 19.12   | DCN 03395                             |

### 19.5.3 Wastewater Characteristics

Food establishments use water for food preparation (washing, cooking, drinking water, ice, sinks), clean up (dishwashing, floor, and rack washing), sanitation (toilets), and landscaping (irrigation, parking lot spraying, etc). Using an average wastewater flow range of 3 gallons per day per meal (Tchobanoglous, 1991) and an estimate that Americans eat close to seven million meals per day from food service establishments (AFTS, 2004), EPA estimates that the food service industry generates 21 MGD of wastewater nationally, not including toilet waste (Matuszko, 2005a).

During this study, EPA could not locate nor did commenters provide a readily available source of discharge data for food service establishments that discharge to POTWs. No TRI data are available regarding pollutants in treated wastewater from food service establishments. As a result, EPA obtained data on food service establishments from *PCSLoads2000\_v6*. Because PCS data are for direct dischargers, they may or may not be representative of indirect discharging facilities (particularly for conventional pollutants and/or treatment chemicals such as chlorine). Nevertheless, the data provide some indication of the level and types of pollutants that may be present in discharges from food service establishments. From *PCSLoads2000\_v6*, EPA estimates relatively low TWPE per facility (less than 1 TWPE per year per facility). The pollutants discharged from the industry in the largest amounts, in terms of TWPE, were total residual chlorine (TRC) (14 TWPE per year) and ammonia as nitrogen (1.9 TWPE per year). Table 19-3 summarizes data on pollutant discharges reported from food service establishments.

**Table 19-3. Summary of Wastewater Discharges from the Food Service Establishments Industry**

| Data Source            | Total Annual TWPE Before POTW Removal | Number of Facilities Reporting | Annual TWPE per Facility Before POTW Removal |
|------------------------|---------------------------------------|--------------------------------|--|
| <i>PCSLoads2000_v6</i> | 16                                    | 57                             | <1   |

Source: *PCSLoads2000\_v6*

### 19.5.4 Pass Through and Interference

Based on the available data on food service establishment wastewater characteristics, EPA found that the total TWPE discharged from food service establishments to POTWs is low (<1 TWPE/facility/year). Additionally, EPA expects the main toxic pollutants identified in food service establishment wastewaters will not pass through POTWs because they are typically removed through POTW treatment. For example, chlorine, the pollutant discharged in the largest quantity, has a POTW pollutant removal efficiency of 100 percent. Therefore, EPA's review of current information indicates that there is little to no pass through potential of toxic and nonconventional pollutants from the Food Service Establishments.

EPA also collected data about discharges to POTWs through inquiries to EPA Regional pretreatment coordinators and internet queries. These data sources show that FOG is

the predominant pollutant of concern for food service establishments. FOG discharges from the food service industry can interfere with POTW operations by causing the following:

- Blockages in the POTW collection system leading to combined sewer overflows (CSOs) and sanitary sewer overflows (SSOs) (U.S. EPA, 2004b);
- POTW treatment interference from *Nocardia* filamentous foaming; and
- Damage to collection systems from hydrogen sulfide generation (WEF, 2004).

Food service establishments generate FOG as byproducts from food preparation. FOG captured on site is generally classified into two broad categories: yellow grease and grease trap waste (Wiltsee, 1998). Yellow grease is derived from used cooking oil and waste greases that are separated and collected at the point of use by the food service establishment.

Food service establishments can adopt a variety of best management practices (BMPs) or install interceptor/collector devices to control and capture the FOG material before discharge to the POTW collection system (IRAC, 2004b; ASCE, 2004). For example, instead of discharging yellow grease to POTWs, food service establishments usually accumulate this material for re-sale or re-use in the manufacture of tallow, animal feed supplements, fuels, or other products (U.S. EPA, 2004a).

Additionally, food service establishments can install interceptor/collector devices (e.g., grease traps in sinks and dish washer drain lines) to accumulate grease on site and prevent it from entering the POTW collection system. Proper design, installation, and maintenance procedures are critical for these devices to control and capture the FOG (IRAC, 2004a; TDEC, 2002). For example, devices must allow emulsified FOG to cool and separate in a non-turbulent environment (TDEC, 2002). Additionally, food service establishments must service their interceptor/collector devices at regular intervals (Wiltsee, 1998; Engle, 2005a; Engle, 2005b; CAL FOG, 2004). The required maintenance frequency for interceptor/collector devices “depends greatly on the amount of FOG a facility generates as well as any best management practices (BMPs) that reduce the FOG discharged into its sanitary sewer system. In many cases, an establishment that implements BMPs will realize financial benefit through a reduction in their required grease interceptor and trap maintenance frequency” (WEF, 2004). The annual production of collected grease trap waste and uncollected grease entering sewage treatment plants can be significant and ranges from 800 to 17,000 pounds/year per restaurant (Wiltsee, 1998).

Information collected from control authorities and stakeholders indicate that a growing number of control authorities are using their existing authority (e.g., local limits to implement general pretreatment standards in Part 403) to establish and enforce more FOG regulatory controls (e.g., numeric pretreatment limits, best management practices including the use of interceptor/collector devices) for food service establishments to reduce interferences with POTW operations. For example, since identifying a 73% non-compliance rate with its grease trap ordinance among restaurants, New York City instituted a \$1,000-per-day fine for FOG

---

violations (Engle, 2005a). Other municipal wastewater authorities address FOG discharges, “by imposing mandatory measures of assorted kinds, including inspections, periodic grease pumping, stiff penalties, and even criminal citations for violators, along with ‘strong waste’ monthly surcharges added to restaurant sewer bills. Surcharges are reportedly ranging from \$100 to as high as \$700 and more, the fees being deemed necessary to cover the cost of inspections and upgraded infrastructure” (Engle, 2005a). Pretreatment programs also develop and use inspection checklists for both food service establishments and municipal pretreatment inspectors to control FOG discharges (IRAC, 2004b).

Additionally, EPA identified typical numeric local limits controlling oil and grease in the range of 50 mg/L to 450 mg/L with 100 mg/L as the most common reported numeric pretreatment limit (LaDuca, 2001). Finally, EPA expects that blockages from FOG discharges will decrease as utilities incorporate Capacity, Management, Operations, and Maintenance (CMOM)<sup>17</sup> program activities into their daily practices. Collection system owners or operators that adopt CMOM program activities are likely to reduce the occurrence of sewer overflows, improve their operations, and maintain compliance with their NPDES permit (U.S. EPA, 2005a).

Current information indicates that although FOG may present some interference potential, local outreach and regulatory controls can address FOG sufficiently. EPA also notes that under the provisions of Part 403.5(c)(1) & (2), in defined circumstances, a POTW must correct interference incidents with enforcement and oversight activities.

### **19.5.5 Findings of EPA’s Review of the Food Services Establishments Industry**

Based on the available information, EPA found that there was low potential for pass through of toxic and non-conventional pollutants from food service establishments (as measured by hazard per facility). In addition, interference from conventional-type pollutants can be adequately addressed by local limits established to implement the general pretreatment standards under Part 403 and enforcement of those limits. For these reasons, EPA concludes that development of categorical pretreatment standards for food service establishments is not warranted at this time.

## **19.6 Health Services Industry**

The Health Services Industry includes establishments engaged in various aspects of human health (e.g. hospitals, dentists, medical/dental laboratories) and animal health (e.g. veterinarians). EPA reviewed wastewater discharges from the Health Services Industry in response to comments made on the 2004 Final Plan and the 2006 Preliminary Plan. This section briefly discusses EPA’s current findings on the Health Services Industry.

### **19.6.1 Comments Received**

In response to the 2004 Plan, MCES raised concerns about mercury discharges from dental facilities and suggested that EPA provide guidance regarding amalgam separator

---

<sup>17</sup> EPA has provided guidance to owners/operators of sanitary sewer collection systems through CMOM program guidelines to reduce sanitary sewer overflows (SSOs) (U.S. EPA, 2005a).

programs (OW-2003-0074-0670). NRDC included dental facilities in a list of industries that it believes meet the criteria of Section 304(m)(1)(B) and therefore should have been identified for an effluent guidelines rulemaking (OW-2003-0074-0733)<sup>18</sup>. EPA also received stakeholder comments in response to the 2006 Preliminary Plan. King County Wastewater Treatment Division, Hampton Roads Sanitation District, and NACWA indicated that discharges from the Health Services Industry are sufficiently controlled by local limits and general pretreatment standards (OW-2004-0032-1042, 1086, and 1093); Washington State Department of Ecology indicated that categorical pretreatment standards are necessary to control discharges from dental facilities (OW-2004-0032-1036); and Arkansas Department of Environmental Quality recommended that EPA study hospitals and dental facilities, with particular focus on emerging pollutants of concern, and laboratory and pharmaceutical “exotics” (OW-2004-0032-0678).

### **19.6.2 Industry Profile**

Health services establishments fall under SIC Major Group 80 Health Services and Industry Group 074 Veterinary Services. According to the 2002 Census, there are over 475,000 facilities in the Health Services Industry (Mott and Kaplan, 2005). For this study, EPA included within the Health Services Industry the following six industrial sectors: independent and stand-alone medical and dental laboratories, offices and clinics of doctors of medicine, offices and clinics of dentists, nursing and personal care facilities, veterinary care services, and hospitals and clinics. EPA included medical and dental laboratories in its review of the Health Services Industry, and not in its review of the Independent and Stand-Alone Laboratories industry (discussed in Section 19.7), because medical and dental laboratories have similar wastewater characteristics as hospitals and dental facilities. Additionally, medical and dental laboratories are often co-located with hospitals and dental facilities.

All six industrial sectors require services to be delivered by trained professionals for the purpose of providing health care and social assistance for individuals. These entities may be free standing and perhaps privately owned or may be part of a hospital or health system. The services can include diagnostic, preventative, cosmetic, and curative health services.

In 1976, EPA promulgated 40 CFR Part 460 which only applies to effluent discharges to surface water from hospitals with greater than 1,000 occupied beds. 40 CFR Part 460 did not establish pretreatment standards for indirect discharging facilities.

Nearly all facilities within the Health Services Industry are indirect dischargers (i.e., no discharge data reported in PCS) and few facilities report to TRI (only Federal facilities in the healthcare industry are required to report to TRI) (U.S. EPA, 2005b). For 2002, PCS only has data for two facilities which are considered “major” sources of pollutants.

### **19.6.3 Wastewater Characteristics**

EPA obtained relatively little information on the pollutant discharges from the Health Services Industry during its screening-level reviews because TRI and PCS data for this industry are sparse. In 1989, EPA published a Preliminary Data Summary (PDS) for the

---

<sup>18</sup> EPA did not identify this industry as a potential new category under section 304(m)(1)(B), as that provision applies only to direct discharging industries subject to effluent guidelines – not to indirect dischargers.

Hospitals Point Source Category (U.S. EPA, 1989). Also, EPA’s Office of Enforcement and Compliance Assistance (OECA) published a Healthcare Sector Notebook in 2005 (U.S. EPA, 2005b). In addition, for some portions of this industry such as dental facilities, industry and POTWs have conducted studies to estimate discharges (Stone, 2004). The memorandum entitled, “Industry Sectors Being Evaluated under Proposed ‘Health Services Industry’ Category” includes a detailed examination of the type of operations performed, pollutants and wastewaters generated, and available pollution prevention and treatment options for the Health Services Industry (Johnston, 2005a). This section provides a summary of EPA’s findings on the wastewater characteristics of the Health Services Industry.

Based on preliminary information, the major pollutants of concern in discharges from health care service establishments include mercury, silver, pharmaceuticals, endocrine-disrupting compounds, and biohazards (U.S. EPA, 2005b). The majority of the silver originates from silver-based photographic materials used in photograph and X-ray processing, which may be discharged in wastewaters from dental clinics and hospitals. The majority of the mercury originates from the following sources: amalgam used in dental facilities; and medical equipment, laboratory reagents, and cleaning supplies used in healthcare facilities. (Johnston, 2005a; Johnston, 2005b) EPA found little to no quantitative information on wastewater discharges of emerging pollutants of concern such as pharmaceuticals, EDCs and biohazards.

#### **19.6.4 Pass Through and Interference Potential**

POTW pollutant removal efficiencies for silver and mercury are relatively high (88% and 90%, respectively), but EPA only has limited data on the amount of pollutant discharges from the Health Services Industry and POTW removal efficiencies of other pollutants of concern, including pharmaceuticals such as antibiotics, hormones, and endocrine-disrupting compounds. As a result, EPA does not have enough information at this time to determine if the pollutants discharged from the Health Services Industry are likely to pass through POTWs.

Based on limited data available, EPA did not identify any pollutants discharged from the Health Services Industry that will interfere with the operations of POTWs. Hospital laundry facilities discharge a certain amount of organic material, FOG, and an alternating range of pH (alkaline detergent followed by an acidic sanitizer). Depending upon the processes employed, the hospital laundry waste stream can have elevated temperatures and pH extremes and can contain starch, particulate (including lint), proteins (blood products), detergents, and oxidizers (bleach or other disinfectant). However, these laundry-related wastes are diluted by the large volume of other hospital wastewater. The majority of hospital wastewater (77 percent) results from cooling (53 percent) and domestic sewage (24 percent), which do not present interference problems. Also, BOD and COD concentrations from hospital laundry wastewater are usually in the normal range for domestic sewage (Johnston, 2005b).

#### **19.6.5 Findings of EPA’s CWA Sections 304(g) and 307(b) Review of the Health Services Industry**

EPA found that it does not have readily available information to make an informed decision as to whether toxic and non-conventional discharges associated with the health service industries pass through POTWs. For this reason, EPA plans to conduct a detailed

study of this industry during the 2007-2008 review cycle. In this detailed study, EPA will attempt to better quantify pollutant discharges in wastewater discharged by health service facilities including endocrine-disrupting compounds. EPA will also investigate whether there are technologies, process changes or pollution prevention alternatives that would significantly reduce discharges to POTWs. Finally, EPA will attempt to evaluate the pass through and interference potential of such discharges.

## **19.7 Independent and Stand-Alone Laboratories**

Independent and stand-alone laboratories include facilities that conduct commercial physical and biological research and laboratories that perform various types of testing. EPA reviewed wastewater discharges from the Independent and Stand-Alone Laboratories Industry in response to comments made on the 2004 Final Plan and the 2006 Preliminary Plan. This section briefly discusses EPA's findings on the Independent and Stand-Alone Laboratories industry.

### **19.7.1 Comments Received**

In response to the 2004 Plan, MCES commented that inspections of Independent and Stand-Alone Laboratories indicate that the wastewater discharges do not warrant regulation (OW-2003-0074-0670), and NRDC included independent and stand-alone laboratories in a list of industries that it believes meet the criteria of Section 304(m)(1)(B) and therefore should have been identified for an effluent guidelines rulemaking (OW-2003-0074-0733)<sup>19</sup>. EPA received no stakeholder comments in response to the 2006 Preliminary Plan about the Independent and Stand-Alone Laboratories industry.

### **19.7.2 Industry Profile**

Independent and stand-alone laboratories are establishments classified under SIC codes 8731 and 8734. Typical operations at independent and stand-alone laboratories include the following: contract research in the healthcare, chemical, natural resources, energy, or manufacturing industries (SIC code 8731); or commercial testing labs in the environmental, material science, healthcare, industrial hygiene, food, and engineering sectors (SIC code 8734) (e.g., forensic laboratories, pollution testing, hydrostatic testing, and radiation dosimetry). EPA did not include medical and dental laboratories in its review of the Independent and Stand-Alone Laboratories industry. EPA included these laboratories in its review of the Health Services Industry, as described in Section 19.3, because medical and dental laboratories have similar wastewater characteristics as hospitals and dental facilities and are often co-located with hospitals and dental facilities.

According to the 2002 Census, SIC code 8731 included 9,173 facilities, and SIC code 8734 included 5,488 facilities. Of these 14,661 independent and stand-alone laboratories, only 0.5 percent (44 facilities) reported discharges to PCS in 2000 (7 major dischargers). Four laboratories reported to TRI in 2000 (one reported direct-only discharges, one reported indirect-

---

<sup>19</sup> EPA did not identify this industry as a potential new category under section 304(m)(1)(B), as that provision applies only to direct discharging industries subject to effluent guidelines – not to indirect dischargers.

only discharges, one reported both direct and indirect discharges, and one reported no discharge) (Matuszko, 2005b).

### 19.7.3 Wastewater Characteristics

Laboratory operations typically use low quantities of a wide variety of substances. Operations are also highly variable. As a result, laboratories typically generate a small quantity of a large variety of pollutants.

During this study, EPA could not locate nor did commenters provide a readily available source of discharge data for independent and stand-alone laboratories that discharge to POTWs. TRI contains information on only a single indirect discharging independent and stand alone laboratory. As a result, EPA obtained data on independent and stand-alone laboratories from *PCSLoads2000\_v6*. Because PCS data are for direct dischargers, they may or may not be representative of indirect discharging facilities (particularly for conventional pollutants and/or treatment chemicals such as chlorine). Nevertheless, the data provide some indication of the level and types of pollutants that may be present in discharges from independent and stand-alone laboratories. From *PCSLoads2000\_v6*, EPA estimates that for SIC codes 8731 and 8734, the industry discharges approximately 34 TWPE and 1 TWPE per year per facility, respectively. The average facility TWPE for SIC code 8731 is largely driven by four facilities that contribute over 95% of the total SIC code 8731 TWPE. If these facilities are considered separately, the average TWPE for facilities in SIC code 8731 is approximately less than 1 TWPE/year. The median flow rate for independent and stand-alone laboratories in SIC code 8731 is 57 MGY. The median flow rate for laboratories in SIC code 8734 is 36 MGY. Table 19-4 summarizes data from *PCSLoads2000\_v6*. EPA did not include TRI data in Table 19-4 because only three laboratories had wastewater data in *TRIReleases2000\_v6* (a fourth laboratory had no reported water discharges in the 2000 TRI).

**Table 19-4. Summary of Wastewater Discharges from the Independent and Stand-Alone Laboratories Industry**

| Data Source            | Total Annual TWPE Before POTW Removal | Number of Facilities Reporting | Annual TWPE per Facility Before POTW Removal |
|------------------------|---------------------------------------|--------------------------------|--|
| <i>PCSLoads2000_v6</i> | 1,200                                 | 44                             | 27   |

Source: *PCSLoads2000\_v6*

From *PCSLoads2000\_v6*, metals (iron, copper, lead, and silver) and chlorine are the pollutants with the largest discharge in terms of TWPE. Iron is the pollutant with the largest discharge, in terms of TWPE (68% of total TWPE).

### 19.7.4 Pass Through and Interference Potential

As indicated above, the main pollutants driving the TWPE reported to PCS in 2000 are metals and chlorine. POTW percent removals for these pollutants range from 77 (lead) to 100% (chlorine). Accounting for treatment at the POTWs reduces the TWPE associated with

these pollutants substantially. For the industry, the average annual TWPE would be reduced to 5 TWPE per lab, and for SIC code 8731, it would be reduced to less than 10 TWPE per lab.

EPA did not locate nor did commenters provide any data relating to the interferences from Independent and Stand-Alone Laboratory discharges.

#### **19.7.5 Findings of EPA’s CWA Sections 304(g) and 307(b) Review of the Independent and Stand-Alone Laboratories Industry**

Based on the available information, EPA concludes that overall the pass through potential of toxic and non-conventional pollutants from independent and stand-alone laboratories is low (as measured by hazard per facility). For these reasons, EPA concludes that development of categorical pretreatment standards for independent and stand-alone laboratories is not warranted at this time.

### **19.8 Industrial Container and Drum Cleaning**

The Industrial Container and Drum Cleaning (ICDC) industry includes facilities that clean and recondition metal and plastic drums and intermediate bulk containers for resale, reuse, or disposal. EPA collected data and compiled a Preliminary Data Summary for Industrial Container Drum Cleaning Facilities (PDS) in 2002 (U.S. EPA, 2002). The PDS identified approximately 291 ICDC facilities, all of which discharge indirectly to a POTW.

#### **19.8.1 Comments Received**

The Metropolitan Sewer District of Greater Cincinnati (MSD) commented on EPA’s Preliminary 2004 and 2006 ELG Plans (OW-2003-0074-0741; OW-2004-0032-1051). They recommended that EPA evaluate the need for ELGs for the drum reconditioning and tote recycling industry. They explained that they had consistent compliance problems with all six drum reconditioning facilities in their district. MSD commented that in discharges from this industry they had found levels of mercury, petroleum oil and grease, pH and zinc that were outside of the acceptable local limits. MSD also suggested that EPA’s recent promulgation of ELGs for the Transportation and Equipment Cleaning (TEC) industry changed the operating procedures for the ICDC industry. They suggested that as a result of these changes totes and drums are now more attractive shipping containers than tank trucks, because their discharges are not controlled by an effluent guideline. Washington State Department of Ecology also commented that the ICDC industry is an appropriate category to study.

#### **19.8.2 Industry Profile**

ICDC facilities often report under SIC code 7699: Repair Shops and Related Services. However, SIC code 7699 encompasses a wide range of operations, of which drum cleaning and reconditioning is only a small subset (U.S. EPA, 2002). As a result, data for SIC code 7699 from TRI, PCS and the U.S. Economic Census are not representative of ICDC facilities and, therefore, are not presented.

Operations at ICDC facilities are classified into three categories:

- Drum washing;
- Drum burning; and
- Intermediate Bulk Container cleaning/reconditioning.

Drums, which may be constructed of steel or plastic, typically contain oil and petroleum, industrial chemicals, paint and ink, cleaning solvents, resins, adhesives, food, or pesticides. Intermediate bulk containers may contain oil and petroleum, chemicals, or food.

Based on 1994 data, there are a total of 291 ICDC facilities in the U.S., of which 173 also clean transportation equipment (U.S. EPA, 2002). Additional information about the ICDC industry is available from the Reusable Industrial Packaging Association (RIPA), a trade association which represents the industrial container and reconditioning industry in North America. The RIPA web page listed 92 reconditioner members as of 2004 (RIPA, 2004). Also, according to RIPA, the majority of container reconditioners are small businesses as defined by the SBA for SIC code 7699 (RIPA, 2000).

### 19.8.3 Wastewater Characteristics

Because neither the PCS nor TRI database contains any information specific to discharging ICDC facilities, EPA used information from the 2002 PDS to characterize wastewater generation and pollutants of concern and their concentrations in untreated ICDC wastewaters. According to the 2002 PDS, the ICDC industry generates approximately 280 to 290 million gallons of wastewater per year. The greatest source of wastewater is rinse water. Other sources include: interior preflushes and washes; spent cleaning solutions; exterior washwater; leak testing wastewater; compressor condensate; boiler blowdown; acid washing emissions scrubber water; and label removal.

EPA conducted site visits at three ICDC facilities in 2000 and analyzed wastewater samples collected at these facilities. EPA also collected samples of untreated wastewater (raw wastewater) from four steel drum reconditioning facilities in the 1980s. These data are the basis for EPA's raw wastewater quality estimates for this industry. EPA did not analyze any of the samples collected in the 1980's for dioxins<sup>20</sup>. However, EPA detected dioxins in wastewater samples collected at all three facilities in 2000.

Using information provided in the PDS, EPA estimated the number of ICDC facilities and how they manage their wastewater. These estimates are presented in Table 19-5.

---

<sup>20</sup> The term dioxins used in this section refers to polychlorinated dibenzo-p-dioxins (CDDs) and polychlorinated dibenzofurans (CDFs), a group of persistent, bioaccumulative, and toxic chemicals. The most toxic of this family of compounds is 2,3,7,8-tetrachlorodibenzo-p-dioxin, which is often referred to as 'dioxin.' However, there are 16 other CDDs and CDFs compounds (called congeners) which, like TCDD, include chlorine substitution of hydrogen atoms at the 2, 3, 7, and 8 positions on the benzene rings. In this section, EPA uses the term dioxins to refer to all 17 of the 2,3,7,8-substituted CDDs and CDFs.

---

**Table 19-5. Estimated Number of ICDC Facilities, by Discharge and Treatment**

| Description   | Number of Facilities |
|---|----------------------|
| Total number of ICDC facilities   | 291                  |
| Do not discharge wastewater because they either completely reuse all wastewater generated or they contract for off-site treatment and disposal. | 104                  |
| Discharge to POTWs (total)  | 187                  |
| Discharge to POTWs (with pretreatment)  | 104                  |
| Discharge to POTWs (no pretreatment)  | 83                   |

Using these assumptions about the number of ICDC facilities that discharge and pretreat their wastewaters and sampling data summarized in the PDS, EPA estimated the amount of pollutants discharged to POTWs and to receiving streams. As shown in Tables 19-5 and 19-6, EPA estimated that 187 facilities discharge 28,445 TWPE to their POTWs, including 12,032 TWPE from dioxins. EPA further estimated that the POTWs remove more than 80% of the discharged pollutants, so that baseline discharge for the entire ICDC industry to surface water is approximately 5,000 TWPE. Dioxins account for about 40% (2,000 TWPE) and metals (particularly lead) account for approximately 58% of the baseline load discharged to surface water (Matuszko, 2006).

#### 19.8.4 ICDC On-Site Wastewater Pretreatment

EPA's PDS reported that pretreatment used by ICDC facilities generally consists of oil/water separation or chemical precipitation followed by air flotation (U.S. EPA, 2002). Because EPA lacks effectiveness data for a wide range of pollutants for these treatment technologies as applied to ICDC wastewaters, EPA used performance data from facilities in the Transportation Equipment Cleaning (TEC) Category. EPA used data from TEC facilities that employ technology equivalent to the basis for the PSES for the tank truck cleaning subcategory (oil/water separation, chemical oxidation, neutralization, coagulation, clarification). EPA used these data because ICDC wastewaters are similar to wastewaters from the TEC tank truck subcategory and ICDC pretreatment is similar to TEC tank truck subcategory pretreatment (U.S. EPA, 2002).

However, EPA does not have any information from the TEC rulemaking to characterize the removal of dioxins and furans by this technology basis. In the absence of TEC data, EPA assumed that pretreatment used by ICDC facilities reduces concentrations of dioxins to below the limits of detection, which EPA assumed to be zero for these calculations. This approach reflects conclusions EPA previously made during its 2004 detailed study of the Petroleum Refining Category.<sup>5</sup> During that study, EPA concluded that dioxins can be removed to non-detect levels from refinery wastewaters using oil/water separators.<sup>6</sup>

<sup>5</sup>Results of EPA's detailed study of the Petroleum Refining Category are presented in the *Technical Support Document for the 2004 Effluent Guidelines Program Plan*, Section 7 (U.S. EPA, 2004c).

<sup>6</sup>From *Technical Support Document for the 2004 Effluent Guidelines Program Plan* pp 7-61 to 7-62 (U.S. EPA, 2004c).

### 19.8.5 Pass Through and Interference Potential

EPA used the traditional pass through evaluation described in Section 19.1 to identify whether there is a significant pass through potential of toxic pollutants and nonconventional pollutants. Specifically, EPA compared toxic pollutant loadings currently discharged to POTWs and surface waters (baseline loadings) to toxic pollutant loadings that would be discharged to POTWs and surface waters upon compliance with pretreatment standards. EPA assumed that ICDC pollutant concentrations would be equivalent to those achieved with the PSES technology basis for TEC Subpart A (Tank Trucks Chemical and Petroleum Cargoes) for all pollutants other than dioxins. As explained above, EPA assumed the technology basis would reduce dioxin concentrations to less than limits of detection (or zero, for these calculations). Table 19-6 summarizes the current baseline loads, the resulting loads if all ICDC facilities pretreated, and the current quantity of toxic pollutants that pass through.

**Table 19-6. Estimated Pollutant Loads Discharged by 187 ICDC Facilities**

|  | TWPE without dioxins | TWPE from dioxins | TWPE (total) | TWPE per facility |
|--|----------------------|-------------------|--------------|-------------------|
| Baseline load discharged to POTWs  | 16,413               | 12,032            | 28,445       | 152               |
| Baseline load discharged to surface water                                | 3,007                | 2,046             | 5,052        | 27.0              |
| Load discharged to surface water if all ICDC wastewaters were pretreated | 125                  | 0                 | 125          | 0.67              |
| Additional Pollutants Removed (if all facilities pretreated)             | 2,882                | 2,046             | 4,927        | 26.3              |

Source: “Industrial Container and Drum Cleaning Facilities” (Matuszko, 2006).

As shown above, on a per facility basis, EPA estimates ICDC facilities currently annually discharge approximately 27 TWPE (accounting for POTW removals). As shown in Table 19-6, if all ICDC facilities pretreated, this would reduce the pass through on a per facility basis to less than 1 TWPE. EPA performed an analysis of the annual costs to the industry for all ICDC facilities to pretreat their wastewater prior to discharge to the POTW. EPA found that the costs to pretreat significantly exceed the incremental pollutant reductions (>\$500/TWPE).

As to interference potential, although MSD noted that ICDC facilities discharging to their treatment system violated local limits, they did not provide information relating to the interference potential from the ICDC industry. EPA did not identify any other information about discharges of ICDC facilities interfering with the operations of POTWs.

### 19.8.6 Findings of EPA’s Review of the ICDC Industry

EPA estimates that the pass through potential of the ICDC industry as a whole approximates 5,000 TWPE annually. EPA performed a pass through analysis assuming all ICDC facilities would employ treatment technology equivalent to the PSES technology basis for the TEC Truck Subcategory. EPA found that the incremental pollutant removals would be small in comparison to the costs of achieving such removals. Furthermore, EPA did not identify any

significant interference concerns. Consequently, EPA has concluded that pretreatment standards are not warranted for the ICDC industry at this time because the total incremental toxic pound reductions for the category as a whole are small and because incremental removals on a per facility basis are also small relative to the associated treatment costs.

## **19.9 Industrial Laundries**

Industrial laundries include establishments that are engaged in the following: operating mechanical laundries; or supplying laundered or drycleaned textiles to industrial, commercial, and government users.

In 1999, EPA concluded rulemaking for facilities in the Industrial Laundries point source category. See 64 FR 45071 (August 18, 1999). EPA determined that all facilities in this industry discharge indirectly to POTWs and that indirect discharges from industrial laundries did not warrant national regulation because of the small amount of pollutants removed by the pretreatment options that were found to be economically achievable. At that time, EPA estimated the total annual TWPE for industrial laundries to be 88,000 and that the amount of pollution that would be removed through pretreatment standards would be less than 32 TWPE per facility annually (accounting for POTW removals). In addition, EPA found that POTWs were generally not experiencing problems with discharges from this industry, and that such discharges were unlikely to present a problem at the national level. EPA found that to the extent that isolated problem discharges occur, existing pretreatment authority is available to control these isolated discharges. EPA concluded that for this industry, the best way to control effluent discharges of certain organic pollutants is to remove the pollutants which are contained on the laundry items before they are washed, rather than establishing categorical pretreatment standards for discharges from this industry.

In addition, at the time of EPA's final decision, representatives from this industry agreed to a voluntary pollutant reduction program. The industry refers to this program as the Laundry Environmental Stewardship Program or LaundryESP<sup>®</sup>. The industry designed this program to encourage improvement in four areas: water usage; energy usage; pollutant discharges to the sewer; and use of wash chemicals with a more positive environmental profile. As part of this program, the industry has been collecting information from program participants in four improvement areas. In 2004, the industry collated this information and provided a summary of the results to date.

EPA conducted a review of discharges from the Industrial Laundries industry based on comment received in response to the 2004 Final Plan. EPA used the information from the 2004 summary information from the LaundryESP<sup>®</sup> program as the primary information source to update the data collected for the 1999 final action. This section briefly discusses EPA's findings on the Industrial Laundries industry.

### **19.9.1 Comments Received**

In response to the 2004 Plan, MCES commented that little benefit would be attained from categorical standards for industrial laundries (OW-2003-0074-0670), and the Uniform and Textile Service Association (UTSA) provided information on LaundryESP<sup>®</sup>, a

voluntary program that they believe has been successful at raising the environmental performance of industrial laundries (OW-2003-0074-0720). EPA also received stakeholder comments in response to the 2006 Preliminary Plan. UTSA and King County Wastewater Treatment Division agreed with EPA's conclusion that categorical pretreatment standards are not necessary for the Industrial Laundries industry (OW-2004-0032-1064 and 1042), while the Arkansas DEQ recommended that EPA revisit pretreatment standards for the industry (OW-2004-0032-0678).

### **19.9.2 Industry Profile**

Industrial laundries primarily include facilities in SIC codes 7211 and 7218. Brief descriptions of these SIC codes are as follows:

- 7211: Establishments primarily engaged in operating mechanical laundries with steam or other power.
- 7218: Establishments primarily engaged in supplying laundered or drycleaned work uniforms, wiping towels, protective apparel (gloves, flame resistant clothing, etc.), dust control items (treated mats or rugs, mops, cloths, etc.), and similar items to industrial, commercial, and government users.

According to 1997 U.S. Census Bureau data, there are approximately 3,100 industrial laundry facilities in the United States. From data collected for the 1999 Final Action, there are 1,700 U.S. industrial laundries. No industrial laundry facilities reported to TRI or PCS in 2000 (Matuszko, 2005c).

### **19.9.3 Wastewater Characteristics**

The LaundryESP<sup>®</sup> program established goals to reduce water and energy usage by 10 to 25 percent per pound of textile processed, a reduction of 20,000 TWPE of pollutants discharged, and 10 to 25 percent substitution of wash chemicals with chemicals with a more positive environmental profile. The results of this program's review are summarized below.

As of 2002, 750 industrial laundry facilities were participating in the LaundryESP<sup>®</sup>. According to industry documents, this participation accounts for nearly 70 percent of the industry's revenue (2002). From 1997-2002, the industry conducted three facility surveys, one pollutant data survey, and three wash chemical surveys (Matuszko, 2005c).

A review of the 2002 LaundryESP<sup>®</sup> data by the UTSA and the Textile Rental Service Association (TRSA) indicated that 326 of the 562 reporting facilities (58 percent) used one or more of the following wastewater treatment systems: air stripping, carbon absorption, centrifuging, chemical emulsion breaking, dissolved air flotation, induced air flotation, microfiltration, oil skimming, oil/water separation, pH adjustment, polishing filters, reverse osmosis, rotary screening, and ultrafiltration (Matuszko, 2005c).

The LaundryESP<sup>®</sup> data demonstrate that from 1997 to 2002 the participating facilities reduced water usage per pound of textile processed by 12.5 percent: from an average of 2.61 gallons/pound of textile processed to an average of 2.28 gallons/pound of textile processed. In addition, the industry reduced its water usage by 5.5 billion gallons from 1997 to 2002. Energy usage showed a similar trend with an 11.8 percent reduction in the energy use/pound of textile processed. The average energy usage dropped from 3,650 btu/lb to 3,219 btu/lb. The industry also saw a 100 percent increase (from 3 to 6 million lbs/yr) in the use of peroxide bleaches as wash chemicals which have fewer toxic byproducts than the standard wash chemicals (Matuszko, 2005c).

One way facilities have reduced water usage is through installation of tunnel washers, which have a built-in “reuse cycle” where the final rinse water is automatically cycled back to the first rinse. According to the industry, there is also an industry-wide increase in pollution prevention activities such as installation of more efficient washers and extractors, and use of detergents that allow for lower wash temperatures and a lower pH for the removal of oils and grease (Matuszko, 2005c).

The LaundryESP<sup>®</sup> database also demonstrated overall toxic pollutant reductions from 1998 to 2002. Table 19-7 summarizes the discharges from the industrial laundries industry as a whole from 1998 to 2002, based on information in the LaundryESP<sup>®</sup> database<sup>1</sup> (Matuszko, 2005c).

**Table 19-7. Pollutant Discharges from Industrial Laundry Facilities  
(Measured as TWPE)**

| Year | TWPE   |
|------|--------|
| 1998 | 40,677 |
| 1999 | 29,090 |
| 2000 | 32,830 |
| 2001 | 22,277 |
| 2002 | 23,162 |

Data Source: LaundryESP<sup>®</sup>; “Industrial Laundries” (Matuszko, 2005c).

#### 19.9.4 Pass Through and Interference Potential

The industrial laundries industry has worked to reduce discharges since EPA’s 1999 Final Action. Based on the approximately 750 laundries and 23,000 TWPE estimated for 2002 in Table 19-7, the average annual TWPE is less than 31 TWPE per facility, prior to treatment at the POTW.

In terms of interference potential, EPA did not locate nor did commenters provide any updated data relating to the interference potential from the Industrial Laundries industry.

<sup>1</sup>The industry calculated the TWPE estimates using information in its database and TWFs from the 1999 Industrial Laundries record.

### **19.9.5 Findings of EPA’s Review of the Industrial Laundries Industry**

Based on the industry’s 2004 evaluation of the Laundry ESP program, EPA concludes that pollutant discharges from industrial laundries have decreased since its 1999 decision not to establish categorical pretreatment standards for this industry. Therefore, pass through and interference potential from industrial laundries continues to be low (as measured in hazard per facility), and development of categorical pretreatment standards for industrial laundries continues to be unwarranted at this time.

### **19.10 Photoprocessing**

The Photoprocessing industry includes establishments that are engaged in providing the following services: portrait photography for the general public; commercial photography; commercial art or graphic design; or photo finishing.

In 1976, EPA promulgated a final rule establishing BPT for the Photographic Category (Part 459). BPT regulations under Part 459 limit direct discharges of wastewater for silver, cyanide, and pH. In 1997 published EPA a Preliminary Data Study for the Photoprocessing Industry (1997 PDS) (U.S. EPA, 1997). That study noted that most photoprocessing facilities are small (less than 10 employees), typically discharge less than 1,000 gallons/day of wastewater, and overwhelmingly discharge to POTWs. As a result, EPA reviewed discharges from photoprocessing facilities as part of the categories composed primarily of indirect dischargers. This section briefly discusses EPA’s findings on the Photoprocessing industry.

#### **19.10.1 Comments Received**

EPA received no stakeholder comments in response to the 2004 Plan about the Photoprocessing industry. EPA received comments from the King County Wastewater Treatment Division in response to the 2006 Preliminary Plan, stating that categorical pretreatment standards are not necessary for the Photoprocessing industry (see OW-2004-0032-1042).

#### **19.10.2 Industry Profile**

The Photoprocessing industry includes facilities in SIC codes 7221, 7335, 7336, and 7384. The 1987 SIC Code Manual defines these SIC codes as follows:

- 7221: Establishments primarily engaged in still or video portrait photography for the general public. Included in this classification are school, home, and transient portrait photographers.
- 7335: Establishments engaged in providing commercial photography services for advertising agencies, publishers, and other business and industrial users.
- 7336: Establishments primarily engaged in providing commercial art or graphic design services for advertising agencies, publishers, and other

business and industrial users. Included in this classification are producers of still and slide films.

- 7384: Establishments primarily engaged in developing film and photographic prints and enlargements. Data for retail outlets (kiosks), which are owned and operated by photo finishing laboratories for the pickup and delivery of film, are merged with data for the laboratory which owns them and are not treated as separate establishments.

The PCS database contains little information on this industry because it consists primarily of indirect dischargers. The PCS database contains discharge information for only one facility for the year 2000. No facilities in the photoprocessing industry reported to TRI in 2000 (Matuszko, 2005d). The TRI database contains little information on this industry, in part, because the majority of photoprocessing facilities have few employees and are not required to report to TRI.

### 19.10.3 Wastewater Characteristics

EPA obtained information on the photoprocessing industry's wastewater sources and characteristics from the 1997 PDS. Process water used in photoprocessing consists of (1) film and paper wash water; (2) solution make-up water; and (3) area and equipment wash water. According to the 1997 PDS, photoprocessors typically discharge less than 1,000 gallons of wastewater per day. The 1997 PDS also documents 296 million square feet of film and 4,130 million square feet of paper processed per year. EPA estimates that the total U.S. wastewater discharge for the Photoprocessing industry was 2,260 million gallons per year (MGY) in 1994 and 1,840 MGY in 2003 (Matuszko, 2005d).

Silver from silver-halide printing accounts for the majority of the TWPE associated with photoprocessing wastewater. Table 19-8 summarizes the wastewater discharges from the photoprocessing industry.

**Table 19-8. Summary of Wastewater Discharges from the Photoprocessing Industry**

| Data Source                             | Total Annual TWPE <sup>a</sup> | Number of Facilities Estimated in Industry <sup>b</sup> | Annual TWPE per Facility |
|---|--------------------------------|---|--------------------------|
| Raw Discharges (before POTW removal)    | 2,543,010                      | 39,393  | 64.6                     |
| Treated Discharges (after POTW removal) | 300,969                        | 39,393  | 7.64                     |

Source: "Photoprocessing" (Matuszko, 2005d).

<sup>a</sup>2003 estimates (using 1997 PDS pollutant concentrations and 2003 wastewater flows)

<sup>b</sup>Estimates from 2002 U.S. Census Bureau (U.S. Census, 2002)

The industry trend towards digital photography may decrease the discharge of silver-laden wastewater associated with silver-halide printing. The use of digital photography and digital printing increased in the U.S. from 2002 to 2004. In 2002, digital cameras were owned by 18 percent of adults. In 2003, digital cameras were owned in 30 to 50 percent of U.S.

households. In 2004, shipments of digital still cameras in the U.S. grew by roughly 30 percent, indicating digital camera use in 60 to 80 percent of U.S. households (Matuszko, 2005d).

Contrarily, pictures from digital cameras can still be printed using silver-halide technology, for better quality. Although this is not currently an identified trend, film manufacturers have incentive to establish this trend, to keep their part of the market share (Matuszko, 2005d).

#### **19.10.4 Wastewater Treatment and Pollution Prevention**

EPA estimates that discharges of silver account for 99 percent of the toxic load discharged by the photoprocessing industry. According to the 1997 PDS, silver recovery is almost always practiced to some extent at photoprocessing facilities. The most common methods of silver recovery are metallic replacement and electrolytic recovery.

Many POTWs have stringent silver limits in their NPDES permits or need to reduce metals concentrations in biosolids. POTWs have identified photographic facilities as a whole as a major source of silver. In an attempt to provide photoprocessing facilities and POTWs with a cost-effective alternative to numeric limits and monitoring, in 1997, NACWA (formerly AMSA), the Silver Council, and two industry groups for the Photographic industry developed a “Code of Management Practices for Silver Dischargers” (Silver CMP). The Silver CMP provides recommendations on control technologies and management practices for controlling silver discharges to POTWs, and encourages pollution prevention technologies such as water conservation. The recommended practices are defined by a minimum recovery of silver from silver-rich processing solutions (e.g., 90%, 95%, and 99%). The minimum recovery and recommended practices vary with the size of the photoprocessor, defined by flow volume of silver-rich solution and wash water. Four POTWs documented loadings reductions of 20 to 52 percent over historical baselines after CMP implementation (Matuszko, 2005d).

#### **19.10.5 Pass Through and Interference Potential**

As described above, pollutant loading estimates based on most recent information available indicate annual TWPE discharges for the industry are approximately 300,000 (over 99% due to silver). On a per facility basis, accounting for a POTW removal for silver of 88%, this equates to discharges of less than 10 TWPE per facility per year. As to interference potential, EPA did not locate nor did commenters provide any updated data relating to the interference potential from discharges from photoprocessing wastewater.

#### **19.10.6 Findings of EPA’s Review of the Photoprocessing Industry**

EPA’s review of current information indicates that there is not a significant concern with pass through and interference at POTWs from this industry’s discharges. EPA concludes that categorical pretreatment standards are not warranted for this industry at this time.

## **19.11            Printing and Publishing**

Printing and publishing establishments are engaged in operations that include five main printing processes: lithographic printing; screen printing; flexographic printing; letterpress printing; and gravure printing.

In October of 1983, EPA published a study of the Printing and Publishing industry, entitled *Summary of Available Data on the Levels and Control of Toxic Pollutant Discharges in the Printing and Publishing Point Source Category* (1983 Data Summary) (U.S. EPA, 1983). At that time, EPA concluded that national pretreatment standards were not warranted due to the small quantity of toxic pollutant discharges associated with this industry (0.0021 to 0.914 pounds per day per facility). This section briefly discusses EPA’s findings from the most recent review of the Printing and Publishing industry.

### **19.11.1            Comments Received**

In response to the 2004 Plan, MCES commented that categorical pretreatment standards are not warranted for the Printing and Publishing industry (OW-2003-0074-0670), and NRDC suggested that EPA develop regulations for the industry that focus on preventing pollution by substituting materials, minimizing changeover, and recycling ink (OW-2003-0074-0733)<sup>21</sup>. EPA received comments from the King County Wastewater Treatment Division in response to the 2006 Preliminary Plan stating that categorical pretreatment standards are not necessary for the Printing and Publishing industry (see OW-2004-0032-1042).

### **19.11.2            Industry Profile**

The Printing and Publishing industry includes facilities in SIC codes 2732, 2752, 2754, 2759, 2761, 2771, 2782, 2789, 2791, 2796, and 7334. Brief descriptions of these SIC codes are as follows:

- 2732: Book printing;
- 2752: Commercial printing, lithographic;
- 2754: Commercial printing, gravure;
- 2759: Commercial printing, not elsewhere classified;
- 2761: Manifold business forms;
- 2771: Greeting cards;
- 2782: Blankbooks and looseleaf binders;
- 2789: Bookbinding and related work;
- 2791: Typesetting;
- 2796: Platemaking services; and
- 7334: Photocopying and duplicating services.

According to the U.S. Census Bureau, there were approximately 49,000 printing and publishing facilities in 1997 and 43,000 facilities in 2002. Of these facilities, 202 reported to TRI in 2000. Sixty-two percent of these facilities reported no wastewater discharges, 37 percent

---

<sup>21</sup> EPA did not identify this industry as a potential new category under section 304(m)(1)(B), as that provision applies only to direct discharging industries subject to effluent guidelines – not to indirect dischargers.

reported only indirect discharges, and one percent reported both direct and indirect discharges. Twenty-one printing and publishing facilities reported to PCS in 2000 (two were classified as major dischargers). The direct dischargers captured in the PCS database represent less than 0.05 percent of the industry. Thus, EPA estimates that the vast majority of printing and publishing facilities are indirect dischargers (Matuszko, 2005e).

### 19.11.3 Wastewater Characteristics

The EPA's October 1983 Summary of Available Data on the Levels and Control of Toxic Pollutant Discharges in the Printing and Publishing Point Source Category (1983 Data Summary) contains information on wastewater generation. According to the 1983 Data Summary, wastewater flows in the industry generally range from 26 to 50 gallons per day and are often not continuous. The 1983 Data Summary also found that the facilities with the largest flows are direct dischargers and only 3.7 percent of printers discharge more than 5,000 gpd of wastewater (Matuszko, 2005e).

No establishments reported wastewater flow data to TRI in 2000. In the 2000 PCS database, 21 facilities report direct discharges, and their flows range from 241 to 2.5 million gallons per day with a median wastewater flow of 0.02 million gallons per day (MGD) (Matuszko, 2005e).

While PCS data is limited for this industry, these more recent data indicate that wastewater discharge volumes may have decreased from those presented in the 1983 Data Summary. This finding is consistent with case studies documenting water reduction practices (Massachusetts Office of Technical Assistance, Connecticut Department of Environmental Protection, and the Enviro\$en\$e Web Page) (Matuszko, 2005e).

EPA obtained discharge data for the untreated wastewater (before POTW treatment) from the Printing and Publishing industry from reported releases to PCS and TRI in 2000. Based on these data (1,630 TWPE<sup>22</sup> discharged from the 76 TRI-reporting facilities in 2000), approximately 21 TWPE is discharged per facility per year.

Eight facilities collectively contribute approximately 81 percent of the total industry TWPE in treated wastewater based on 2000 TRI data (accounting for POTW removals)<sup>23</sup>. Ninety-nine percent of the TWPE discharges from these eight facilities are indirect discharges of copper, which EPA estimated at approximately 44 TWPE per facility based on an estimated facility TPWE of 255 (reported ranges of 11 – 499 TWPE) and accounting for POTW removals. EPA contacted five of these facilities (four companies) to determine the source of copper. These facilities explained that the gravure printing process involves copper and chrome

---

<sup>22</sup> The 2005 memorandum (Matuszko, 2005e) lists the industry TWPE (before POTW treatment) as 1,907, which includes 279.98 TWPE of sodium nitrite discharged from the Citiplate, Inc. facility. In response to comments on the proposed 2006 Plan, EPA revised its methodology for sodium nitrite. See Section 4.2 and DCN 03675. The revised sodium nitrite TWPE from Citiplate, Inc. (before POTW treatment) is 0.486.

<sup>23</sup> The 2005 memorandum (Matuszko, 2005e) lists nine facilities contributing approximately 90 percent of the total industry TWPE. EPA calculated this industry TWPE including sodium nitrite discharges from the Citiplate, Inc. facility based on an older methodology described in footnote 4. In addition, in response to comments, EPA updated the POTW removal rate for sodium nitrite. See Section 4.2 and DCN 03676. The revised sodium nitrite TWPE from Citiplate, Inc. (accounting for POTW removal) is 0.0486.

---

plating of the printing cylinders. The cylinders are de-chromed and de-coppered after every print job, and then re-plated with chrome and copper for the next image imprinting. Etching, polishing and rinsing of the copper plated cylinders releases copper into the wastewater. Copper is also present in the discarded sludge from blue and green inks (Matuszko, 2005e).

Of the five facilities that EPA contacted, all perform gravure printing in addition to other types of printing. Also, four facilities use analytical data to estimate the range of copper transferred to the POTW. The fifth facility back calculates the amount transferred based on copper in filter cake from pretreatment, and the efficiency of the pretreatment system (Matuszko, 2005e).

#### 19.11.4 Wastewater Treatment and Pollution Prevention

Based on the 1983 Data Summary, most printing and publishing facilities do not perform wastewater treatment on site.

#### 19.11.5 Pass Through and Interference Potential

Seventy six facilities reported discharges to TRI in 2000 from printing and publishing facilities. After accounting for POTW removals, the majority of these facilities discharge approximately 1 TWPE per facility annually. TWPE for the eight facilities described in Section 19.11.3 (including platemaking, gravure printing, lithographic printing, and greeting card printing facilities) approximate 44 TWPE per facility annually. Table 19-9 presents the year 2000 TRI discharge data for treated and untreated wastewater.

**Table 19-9. Summary of Wastewater Discharges from the Printing and Publishing Industry**

| Data Source                                     | Total Annual TWPE <sup>a,b</sup> | Number of Facilities Reporting <sup>a</sup> | Annual TWPE per Facility |
|---|----------------------------------|---|--------------------------|
| <i>TRIReleases2000_v6 (Before POTW removal)</i> | 1,630                            | 76  | 21.4                     |
| <i>TRIReleases2000_v6 (After POTW removal)</i>  | 440                              | 76  | 5.79                     |

Source: "Printing and Publishing" (Matuszko, 2005e)

<sup>a</sup>Includes direct and indirect dischargers.

<sup>b</sup>Accounts for reduced TWPE from Citiplate, Inc. sodium nitrite discharge as described in footnotes 4 and 5.

Regarding interference potential, EPA did not locate nor did commenters provide any updated data relating to the interference potential from the printing and publishing industry.

#### 19.11.6 Findings of EPA's Review of the Printing and Publishing Industry

EPA's review of current information indicates that there is not a significant concern with pass through and interference at POTWs from this industry's discharges. EPA therefore finds that categorical pretreatment standards are not warranted for this industry at this time.

## 19.12 Tobacco Products

The Tobacco Products industry is composed of facilities that manufacture the following: cigarettes; cigars; smokeless tobacco (i.e., chewing, plug/twist, and snuff tobacco); loose smoking tobacco (i.e., pipe and roll-your-own cigarette tobacco); and reconstituted (sheet) tobacco; as well as facilities engaged in the stemming and redrying of tobacco.

EPA identified the Tobacco Products industry for review because one public comment on the preliminary 2004 Final Plan suggested that EPA consider developing tobacco products effluent guidelines. In particular, the commenter expressed concern over the quantity of toxics and carcinogens that may be discharged in wastewater associated with the manufacture of cigarettes. At the time of publication of the 2004 Final Plan, EPA was unable to determine, based on readily available information, whether to identify Tobacco Products as a potential new category in the Plan. In particular, EPA lacked information on whether Tobacco Products facilities discharge toxic and nonconventional pollutants in nontrivial amounts, whether the industry is composed of entirely or almost entirely indirect dischargers, and whether indirect dischargers in the industry cause pass through or interference with POTWs. In order to determine whether to identify the tobacco products industrial sector as a potential new point source category, EPA conducted a detailed study of the pollutant discharges for this industrial sector.

During its detailed study of this industry, EPA determined that most tobacco products facilities discharge their wastewater to POTWs. EPA therefore determined that this category is almost entirely composed of indirect dischargers and is therefore not subject to identification as a potential new category for effluent guidelines under CWA section 304(m)(1)(B). EPA therefore proceeded to review this industry in its review of indirect dischargers without categorical pretreatment standards to determine whether to establish such standards under CWA Sections 304(g) and 307(b).

This section briefly discusses EPA's findings on the Tobacco Products industry. For a complete discussion of EPA's review, see *Final Engineering Report: Tobacco Products Processing Detailed Study* (U.S. EPA, 2006).

### 19.12.1 Comments Received

As described above, EPA received one comment on its Preliminary 2004 Plan that it should consider developing ELGS for the tobacco products industry. On its Preliminary 2006 Plan, EPA received four comments that it should not develop ELGs for the tobacco products industry: one from a POTW association, NACWA; one from the City of Winston-Salem, NC; and two from tobacco companies. R.J. Reynolds (Reynolds American) provided information on its tobacco products processes and study reports on the biodegradability of nicotine (OW-2004-0032-1096). For an evaluation of these study reports, see *Comments on the Four Reports Submitted by R.J. Reynolds Tobacco Company in Response to Request for Data in the Notice of Availability of Preliminary 2006 Effluent Guidelines Program Plan* (Upgren, 2006). Lorillard Tobacco Company provided a Sewage Collection and Water Reclamation Plant Report for 2004 for the City of Greensboro (OW-2004-0032-1105.1). The City of Winston-Salem provided pollutant concentrations and other information on the wastewater that tobacco products facilities

discharge to one POTW (OW-2004-0032-1061). NACWA stated that indirect dischargers within the tobacco products industry are efficiently regulated by local pretreatment programs (OW-2004-0032-1093).

### **19.12.2 Industry Profile**

This Tobacco Products industry is divided into the following four industry groups:

- SIC code 2111 (Cigarettes): establishments primarily engaged in manufacturing cigarettes from tobacco or other materials;
- SIC code 2121 (Cigars): establishments primarily engaged in manufacturing cigars;
- SIC code 2131 (Smokeless and Loose Chewing Tobacco): establishments primarily engaged in manufacturing chewing and smoking tobacco and snuff; and
- SIC code 2141 (Reconstituted Tobacco and Tobacco Stemming and Re-drying): establishments primarily engaged in the stemming and re-drying of tobacco or in manufacturing reconstituted tobacco.

Based on information in the 2002 Economic Census and reported in 2004 to the U.S. Alcohol and Tobacco Tax and Trade Bureau (TTB), EPA estimates there are 149 tobacco products facilities in the United States. The number of tobacco products processing facilities has been in decline as facilities consolidate. Of these facilities, EPA has identified three facilities with active NPDES permits that discharge process wastewater directly to waters of the U.S. and at least 15 facilities that discharge indirectly to POTWs. The remaining dischargers are either indirect dischargers or zero dischargers.

### **19.12.3 Wastewater Characteristics**

In conducting its detailed study, EPA conducted outreach to the most significant dischargers in this category. These companies have provided extensive information on processes, pollutant discharges and existing permits. Based on information collected to date, EPA believes that primary processing at cigarette manufacturers and their related reconstituted tobacco operations are the main source of discharged wastewater pollution in this industrial sector.

EPA conducted site visits at six tobacco product facilities: four cigarette manufacturing facilities and two dedicated reconstituted tobacco facilities. In addition to collecting information on processes and wastewater generation, EPA also collected grab samples of wastewater during these site visits. EPA collected these wastewater samples to: (1) further characterize wastewater generated and/or discharged at these facilities; and (2) evaluate treatment effectiveness, as applicable. For the sites visited, EPA also contacted states and POTWs to obtain existing permits and identify concerns. Finally, EPA reviewed and evaluated comments from the Preliminary 2006 Plan regarding the tobacco products processing industry.

EPA's review of effluent data from indirect discharging tobacco products processing facilities demonstrates that such discharges are generally characterized by low concentrations of toxic and nonconventional pollutants – primarily metals. One exception is nicotine, with discharge concentrations ranging from 7,500 ug/L to 31,000 ug/L. Nicotine and metals discharges account for approximately 93% of the total annual TWPE associated with indirect tobacco products processing discharges. Source water appears to be the biggest contributor to metal discharges at both indirect and direct discharging facilities (U.S. EPA, 2006).

#### **19.12.4 Wastewater Treatment**

EPA did not identify any indirect discharging tobacco products processing facilities that operate pretreatment. As a result, EPA also reviewed wastewater discharge data from direct dischargers in this category. Biological treatment with or without nutrient removal is the most commonly employed wastewater treatment technology. Treatability data collected from tobacco products processing facilities demonstrate on site wastewater treatment systems are highly efficient with BOD<sub>5</sub> and nicotine removals in excess of 99 percent. Resulting discharges are characterized by low concentrations of toxic and nonconventional pollutants – primarily metals. However, based on available data, these metal discharges largely result from source water contributions (U.S. EPA, 2006).

#### **19.12.5 Pass Through and Interference Potential**

EPA used the traditional pass through evaluation described in Section 19.1 to identify whether there is a significant pass through potential of toxic pollutants and nonconventional pollutants. Specifically, EPA compared toxic pollutant loadings currently discharged to POTWs and surface waters (baseline loadings) to toxic pollutant loadings that would be discharged to POTWs and surface waters upon compliance with pretreatment standards based on biological treatment with nutrient removal (BNR) (potential post-regulatory loadings). EPA considered BNR treatment technology to be the BAT because both of the direct discharge tobacco facilities sampled by EPA used this technology and based on influent and effluent data collected from these two facilities, EPA determined that BNR treatment systems are generally effective at reducing pollutants in tobacco products wastewater. From this evaluation, EPA found the annual incremental toxic pollutant removals per facility would be small, approximately 29 TWPE/facility (U.S. EPA, 2006), which are similar to the incremental removals EPA calculated for the withdrawn Industrial Laundries proposed rulemaking (32 TWPE/facility). See 64 FR 45071 (August 18, 1999). EPA also performed an analysis of the annual costs for facilities to pretreat using the BNR technology prior to discharge to the POTW. EPA found that the costs to pretreat were well in excess of the incremental pollutant reductions (>\$10,000/TWPE removed).

EPA also evaluated possible negative effects of discharges from tobacco products processing facilities to POTWs. As explained above, nicotine and metals account for approximately 93% of the total annual TWPE associated with indirect discharges from this category. Based on information obtained in this study, POTWs achieve nicotine removals in excess of 96%. EPA compared the concentrations of metals found in indirect tobacco products

processing discharges to those typically found in POTW influent. This comparison demonstrated that metals concentrations discharged by tobacco products processing facilities are lower than those found in typical POTW influent. Based on these findings, EPA believes that tobacco products processing discharges should not have negative impacts on the receiving POTWs (U.S. EPA, 2006).

To verify this finding, EPA contacted POTWs receiving significant tobacco products processing discharges. All POTWs contacted indicated they had experienced little to no problems with such discharges and that they had no problem handling and treating tobacco products processing discharges.

#### **19.12.6 Findings of EPA’s Review of the Tobacco Products Industry**

EPA has found that national pretreatment standards are not warranted for this category at this time because there is low potential for pass through (as measured by incremental toxic pollutant removal) or interference at POTWs.

EPA also reviewed wastewater discharge data from the three direct dischargers in this category and found that national effluent guidelines for direct dischargers are unwarranted at this time, as discharges from these facilities are best addressed through effluent limits established by permit writers on a case-by-case BPJ basis.

#### **19.13 References**

AFTS. 2004. Agri-Food Trade Service. Market Information, United States. Available online at: <http://atn-riac.agr.ca/info/us-e.htm>. Date accessed: October 27. DCN 01464.

ASCE. 2004. American Society of Civil Engineers. *Sanitary Sewer Overflow Solutions*. (April 1). DCN 03046.

CAL FOG. 2004. California Fats, Oils, and Grease TriTAC Workgroup. *A Guide for Developing and Implementing a Fats, Oils, and Grease Control Program for Food Service Establishments*. (September). DCN 03039.

CSIRO. 2004. Australia's Commonwealth Scientific and Industrial Research Organisation. Endocrine Disrupting Chemicals and Pharmaceuticals and Personal Care Products in Reclaimed Water in Australia, Australian Water Conservation and Reuse Research Program. (January). Available online at: [http://www.clw.csiro.au/awcrrp/stage1files/AWCRRP\\_1H\\_Final\\_27Apr2004.pdf](http://www.clw.csiro.au/awcrrp/stage1files/AWCRRP_1H_Final_27Apr2004.pdf). DCN 02186.

Engle, David. 2005a. “FOG Bound Food Service: Restaurant Wastewater Requires Painstaking Care to Circumvent Sewer-rate Surcharges and Drainfield Damage.” (October). Available online at: [http://www.onsitewater.com/ow\\_0509\\_fog.html](http://www.onsitewater.com/ow_0509_fog.html). Date accessed: February 10, 2006. DCN 02616.

- Engle, David. 2005b. FOG Cutters. (December). Available online at: [http://www.gradingandexcavation.com/ow\\_0511\\_fog.html](http://www.gradingandexcavation.com/ow_0511_fog.html). Date accessed: February 10, 2006. DCN 02610.
- Giger, et al. 2003. “Occurrence and Fate of Antibiotics as Trace Contaminants in Wastewaters, Sewage Sludges, and Surface Waters.” *Chimia*. 57: 485–491. Schweizerische Chemische Gesellschaft. ISSN 0009–4293. Available online at: <http://www.sach.ch/doc/chimia/sept03/giger.pdf>. DCN 02185.
- IRAC. 2004a. Interagency Resource for Achieving Cooperation. *A Guide to Restaurant Grease Management: A Regulator’s Desk Reference*. (September). DCN 03043.
- IRAC. 2004b. Interagency Resource for Achieving Cooperation. *A Pocket Guide to Best Management Practices for Restaurant Grease*. (September). DCN 03040.
- Johnston, Carey. 2005a. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Industry Sectors Being Evaluated under Proposed “Health Services Industry” Category.” (August 4). DCN 02293.
- Johnston, Carey. 2005b. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Hospitals and Clinics.” (August 11). DCN 03797.
- LaDuca, Ann. 2001. TetraTech, Inc. *Local Limits Summary*. (December 4). DCN 03131.
- Matuszko, Jan. 2005a. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Food Service Establishments.” (August 11). DCN 02103.
- Matuszko, Jan. 2005b. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Independent and Stand-Alone Laboratories.” (August 11). DCN 02101.
- Matuszko, Jan. 2005c. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Industrial Laundries.” (August 11). DCN 02102.
- Matuszko, Jan. 2005d. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Photoprocessing.” (August 11). DCN 02096.
- Matuszko, Jan. 2005e. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Printing and Publishing.” (August 11). DCN 02294.
- Matuszko, Jan. 2006. U.S. EPA. Memorandum to Public Record for the 2006 Effluent Guidelines Program Plan. “Industrial Container and Drum Cleaning Industry.” (September 11). DCN 03415.
- Mott, Jennifer, and Maureen Kaplan. 2005. Eastern Research Group, Inc. Memorandum to U.S. EPA. “Health Services Industry: Number of Facilities, Companies, and Small Businesses.” (December 20). DCN 02940.

RIPA. 2000. Reusable Industrial Packaging Association, as cited in the Preliminary Data Summary – Industrial Container and Drum Cleaning Industry, June 2002.

RIPA. 2004. Reusable Industrial Packaging Association web site. Available online at: <http://www.reusablepackaging.org/>. Date accessed: October 21, 2004. DCN 04065.

Stone, Mark. 2004. “The Effect of Amalgam Separators on Mercury Loading to Wastewater Treatment Plants.” *CDA Journal*. 32(7):593-600. DCN 02237.

Tchobanoglous, G. 1991. George/Metcalf & Eddy, Inc. *Wastewater Engineering: Treatment, Disposal, and Reuse*. 2<sup>nd</sup> Edition. Irwin/McGraw Hill.

TDEC. 2002. Tennessee Department of Environment and Conservation, Division of Water Pollution Control. *Tennessee Oil and Grease Control Guidance Document*. (June). DCN 03265.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA. 1983. *Summary of Available Data on the Levels and Control of Toxic Pollutant Discharges in the Printing and Publishing Point Source Category*. EPA 440/1-83/400. (October). DCN 01526.

U.S. EPA. 1989. *Preliminary Data Summary for the Hospitals Point Source Category*. EPA 440/1-89/060-n. (September). DCN 02231.

U.S. EPA. 1997. *Preliminary Data Study for the Photoprocessing Industry*. EPA-821-R-97-003. DCN 02230.

U.S. EPA. 1999. *Introduction to the National Pretreatment Program*. EPA-833-B-98-002. Washington, DC. (February). DCN 01887.

U.S. EPA. 2002. *Preliminary Data Summary - Industrial Container and Drum Cleaning Industry*. EPA-821-R-02-011. Washington, DC. (June). DCN 00659.

U.S. EPA. 2004a. Technical Development Document for the Final Effluent Limitations Guidelines and Standards for the Meat and Poultry Products Point Source Category (40 CFR 432). EPA-821-R-04-011. (July). Available online at: <http://www.epa.gov/waterscience/guide/mpp/>.

U.S. EPA. 2004b. *Impacts and Controls of CSOs and SSOs*. EPA-833-R-04-001. Washington, DC. (August). Available online at: [http://cfpub.epa.gov/npdes/cso/cpolicy\\_report2004.cfm](http://cfpub.epa.gov/npdes/cso/cpolicy_report2004.cfm).

U.S. EPA. 2004c. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005a. *Guide for Evaluating Capacity, Management, Operation, and Maintenance (CMOM) Programs at Sanitary Sewer Collection Systems*. EPA-305-B-05-002. (January). DCN 02847.

U.S. EPA. 2005b. *EPA Office of Compliance Sector Notebook Project -Profile of the Healthcare Industry*. EPA/310-R-05-002. (February). Available online at: <http://www.epa.gov/Compliance/resources/publications/assistance/sectors/notebooks/health.html> . DCN 02183.

U.S. EPA. 2006. *Final Engineering Report: Tobacco Products Processing Detailed Study*. EPA-821-R-06-017. (November). DCN 03395.

Upgren, Amy. 2006. U.S. EPA. Memorandum to Jan Matuszko of U.S. EPA. “Comments on the Four Reports Submitted by R.J. Reynolds Tobacco Company in Response to Request for Data in the Notice of Availability of Preliminary 2006 Effluent Guidelines Program Plan.” (May 18). DCN 02798.

WEF. 2004. Water Environment Federation. *The O&M in CMOM: “Operation & Maintenance” - A Reference Guide for Utility Operators*. (September 29). DCN 03045.

Wiltsee, G. 1998. *Urban Waste Grease Resource Assessment*. NREL/SR-570-26141. (November 1). DCN 02606.

**20.0 REVIEW OF DIRECT DISCHARGERS WITHOUT EFFLUENT LIMITATIONS  
GUIDELINES TO IDENTIFY POTENTIAL NEW REGULATORY CATEGORIES FOR  
EFFLUENT GUIDELINES RULEMAKING**

CWA Section 304(m)(1)(B) requires EPA to identify in a plan categories of sources discharging non-trivial amounts of toxic and non-conventional pollutants to waters of the U.S. Based on stakeholder comment and its own crosswalk analysis (see Section 4.1.1), EPA found two industries that were potentially subject to identification under section 304(m)(1)(B): the liquefied natural gas (LNG) import terminals industry and the miscellaneous foods and beverages industry. This section presents EPA’s review of these two industries to determine whether to identify them as potential new categories in the 2006 Plan. EPA did not find any other industries that meet the potential identification criteria in section 304(m)(1)(B). See the memorandum entitled, “Commenter-Identified Industries Not Meeting 304(m)(1)(B) Criteria,” dated December 1, 2006 (Matuszko, 2006b).

Based on its analysis, EPA is not identifying either of these industries as potential new categories in the 2006 Plan because EPA does not believe that ELGs would be an appropriate tool for regulating discharges from either of these industries. In assessing whether ELGs would be appropriate, EPA is required to consider the various factors in section 304(b)(2)(B) in establishing ELGs for an industrial activity – including the availability of treatment technology, economic achievability, non-water-quality environmental impacts, and “such other factors as the Administrator deems appropriate.” EPA believes that section 304(m)(1)(B) gives EPA the discretion to identify in the Plan only those new categories for which EPA believes ELGs may be an appropriate tool. See *Norton v. Southern Utah Wilderness Alliance*, 542 US 55, 70 (2004) (holding that a broad statutory mandate is not sufficient to constrain an Agency’s discretion over its internal planning processes). Instead, EPA believes that discharges from these industries can best be addressed through case by case BPJ-based permit limits, rather than through categorical ELGs. BPJ is a particularly appropriate tool where – as here – there is significant site-specific variability in terms of facility design. A BPJ case-by-case approach would enable permit writers to best capture the technical considerations that might influence the identification of the appropriate pollutant control technology and effluent limits.

**20.1 Liquefied Natural Gas Import Terminals**

This subsection discusses the comments received on liquefied natural gas (LNG) import terminals and presents a brief industry and economic profile.

**20.1.1 Comments Received**

EPA received two comments in response to the Preliminary 2006 Plan suggesting that EPA identify LNG import terminals as a potential new category in the Final 2006 Plan.

Specifically, these two commenters suggested that EPA consider establishing ELGs for pollutant discharges from LNG import terminals that use open-loop re-gasification systems, specifically offshore facilities in the Gulf of Mexico. These commenters cited potential impacts on the marine environment from discharges that contain anti-biofouling agents and thermal pollution (cold wastewater). These commenters suggested that EPA consider

promulgating effluent guidelines for this industrial sector based on closed-loop re-gasification technologies (EPA-HQ-OW-2004-0032-1094 and 1056).


### **20.1.2 Category/Subcategory Analysis**

The LNG import terminal industry is not currently subject to a categorical ELGs. To determine whether this industry is subject to identification under CWA section 304(m)(1)(B), EPA first assessed whether this industry was properly considered a stand-alone category, or whether it should be considered a potential new subcategory of an existing category and reviewed under CWA section 304(b). EPA reviewed the ELGs for the existing 56 industrial point source categories to determine whether the LNG industry could be considered a potential new subcategory of any of these categories. EPA found that some of the minor wastestreams from LNG import terminals (e.g., deck drainage, gray water, and sanitary water) are similar to wastewaters regulated by the Oil and Gas Extraction ELGs (see 40 CFR part 435, Subpart A), and therefore considered whether the LNG industry could be considered a potential new subcategory of this industrial category.

However, EPA found that LNG import terminals perform an entirely different service than facilities in the Oil and Gas Extraction Category, and therefore should not be considered a potential new subcategory. Specifically, while facilities in the Oil and Gas Extraction Category engage in the extraction of raw materials, LNG import terminals process (or “regasify”) the raw material after it has been extracted, liquefied, and delivered to the facility. Thus, the service performed by LNG import terminals is analogous to the Petroleum Refining Category (40 CFR Part 419) – also a stand-alone category that processes a raw material (in that case, oil) extracted by oil and gas extraction facilities. Moreover, the wastewaters associated with the open-loop re-gasification industrial processes performed by LNG facilities are significantly different than the wastewaters associated with facilities in the Oil and Gas Extraction Category. Consequently, EPA determined that this industry constitutes a potential stand-alone category within the meaning of CWA section 304(m)(1)(B). EPA therefore proceeded to analyze whether ELGs would be an appropriate tool for addressing discharges from this category, as discussed below.

### **20.1.3 Industry Profile**

After natural gas has been extracted and liquefied (through cooling to about minus 260°F), it is transported by vessels to LNG import terminals for processing (known as “re-gasification.”) Figure 20-1 (Chinloy, 2005) depicts the function of LNG import terminals in the overall context of natural gas production – from extraction to distribution to consumers.

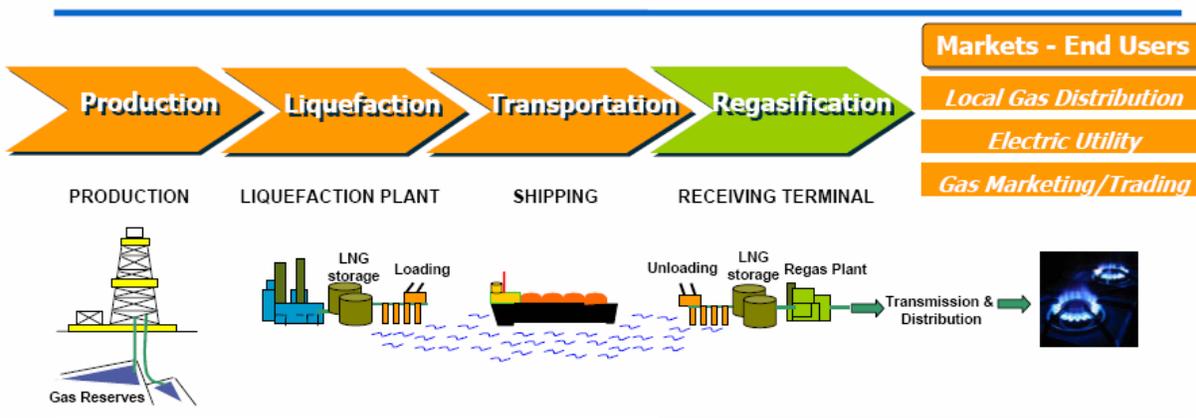

**Figure 20-1. General Description of LNG Importation  
(Chinloy, 2005)**

Interest in LNG imports has been rekindled by higher U.S. natural gas prices in recent years, as well as increased competition and technological advances that have lowered costs for liquefaction, shipping, storing, and re-gasification of LNG (U.S. DOE, 2004). However, although LNG imports exceeded historical highs in 2003, even at the current pace they represent only about 2.7 percent of U.S. consumption and 13 percent of imports. In a 2006 report, the U.S. Department of Energy (DOE) estimated that total capacity at U.S. LNG facilities will increase from 1.4 trillion cubic feet (tcf) to 4.9 tcf in 2015, when net LNG imports are expected to total 3.1 tcf (imports are thus 58 percent of capacity) (EIA, 2006). DOE then predicts that LNG construction will slow after 2015. Capacity in 2030 is expected to be 5.8 tcf, with imports totaling 4.4 tcf (76 percent of capacity). DOE revised its projections of LNG downward from its 2005 report (which reported that DOE expected LNG exports to be 6.4 tcf in 2025) because it believes that more rapid growth in worldwide demand for natural gas than predicted in 2005 will reduce the availability of LNG supplies, raise worldwide gas prices, and make LNG less economical in U.S. markets. Thus, LNG is expected to meet 16 percent of U.S. natural gas demand in 2030. U.S. demand for natural gas is expected to total 27 tcf at that time. The range of uncertainty for this estimate of LNG imports in 2030 is large. DOE's low and high estimates range from 1.3 tcf (a flat growth scenario) to more than double the reference case estimate (9.6 tcf). Despite DOE's downward adjustment to projected LNG imports, imports are still expected to grow under DOE's reference case assumptions.

EPA identified two major factors that affect the pollutant discharges and potential pollutant control technology options for this industrial sector:

- Type of re-gasification technology used (i.e., open-loop or closed-loop); and
- Location of the facility (i.e., onshore or offshore) is the cost to liquefy the gas.

### 20.1.3.1 Type of Re-gasification Technology Employed

During the re-gasification process, the LNG is warmed from minus 260°F to 40°F and increases three fold in volume. Re-gasification of LNG is an endothermic process and requires a heat source. The LNG is pumped through a heating system, where it absorbs heat and vaporizes, or regasifies, into natural gas. EPA considered the two main types of re-gasification technologies (open-loop vs. closed-loop) because the type of re-gasification technology directly influences the amount and toxicity of the potential pollutant discharges. The CWA gives the Agency authority to consider process changes to evaluate technology-based controls of industrial wastewater pollutants (see “process changes” at CWA 304(b)).

LNG import terminals that use open-loop re-gasification extract heat energy from surface water withdrawals in a once-through warming process. There are a number of open-loop re-gasification technologies that include open rack vaporizers (ORV) and shell and tube vaporizers that withdraw and discharge large quantities of surface waters (e.g., 100 to 200 MGD) for the endothermic process. Antibiofouling chemicals (e.g., sodium hypochlorite, total residual chlorine (TRC), or copper) are typically added to efficiently transfer heat between the surface water withdrawals and the LNG. The industrial wastewater discharge typically contains both conventional and nonconventional pollutants, including total suspended solids (TSS) (including biological matter), antibiofouling chemicals, and thermal pollution (cold wastewater). Thermal pollution (cold wastewater) is a “pollutant,” as discussed in recent EPA guidance: “[t]he CWA defines ‘effluent limitation’ to mean ‘any restriction on rates, quantities, or concentrations of chemical, physical, biological, or other constituents which are discharged.’ The thermal energy of a discharge (i.e., as measured in British Thermal Units (BTUs)) is a physical constituent of the discharge, and, as such, may appropriately be addressed by an effluent limitation” (U.S. EPA, 2006a). EPA’s estimate of pollutant discharges from open-loop re-gasification technologies as part of the 2004 Plan can be found in Table 4 of a memorandum entitled, “Overview of Liquefied Natural Gas (LNG) Import Terminals for CWA Section 304(m) Effluent Guidelines Planning”, dated August 19, 2004 (Johnston, 2004).

LNG import terminals that use closed-loop re-gasification do not use surface water in a once-through (open-loop) warming process. Some examples of the method of closed-loop re-gasification heat source generation are using:

- Combustion of 1.0 to 1.5 percent of the imported LNG cargo;
- Air heat exchange with or without an intermediary fluid flow loop; and
- Waste heat from nearby industrial facilities.

These closed-loop re-gasification technologies do not use surface water and discharge only a very small fraction of the wastewater and pollutants, in amount and toxicity of discharged pollutants, compared to open-loop re-gasification pollutant discharges. For example, see the estimate of pollutant discharges from the Cabrillo Port LNG import terminal NPDES permit application (U.S. EPA, 2006b).

### 20.1.3.2 Onshore Versus Offshore

The location of the LNG import terminal (i.e., onshore vs. offshore) influences the range of available technology options for pollutant removals. Offshore LNG import terminals may have significant space limitations that could significantly increase the costs and economic impacts and affect the technical feasibility of implementing the technology options that may be available for onshore facilities. Moreover, one technology option for onshore facilities, employing waste heat from nearby industrial facilities, is not available for offshore facilities. Consequently, EPA separately evaluated the potential pollutant discharges and potential technology options for the onshore and offshore subsectors of this industry. The CWA gives the Agency authority to consider geographic factors to evaluate technology-based controls of industrial wastewater pollutants (see “such other factors as the Administrator deems appropriate” at CWA 304(b)).

All existing, approved, and proposed onshore LNG import terminals are using or plan to use closed-loop re-gasification. There is one existing offshore LNG import terminal, which is licensed to operate in the open-loop mode, but can operate its shell and tube heat exchanger vaporizers in the open-loop (6 days to offload at 0.5 Bcfd) or closed-loop mode (7.5 days to offload at 0.4 Bcfd) (USCG, 2003). Most of the approved or proposed offshore LNG facilities are proposing to use closed-loop re-gasification.

### 20.1.3.3 Number of Facilities

EPA identified the existing, approved, and proposed LNG import terminals.

#### *Existing LNG Import Terminals*

There are six existing LNG import terminals operating in the U.S. Table 20-1 and Figure 20-2 present more detailed information about each of the facilities.

- **Onshore:** Five onshore LNG import terminals are currently operating in the U.S. These onshore terminals use a variety of closed-loop re-gasification technologies. EPA did not identify any significant pollutant discharges associated with the re-gasification processes at these facilities as compared to facilities with open-loop re-gasification.
- **Offshore:** One offshore terminal began operating in 2005. This offshore terminal both transports and re-gasifies the LNG onboard. This terminal is licensed for operation in the Gulf of Mexico in the open-loop mode and has the operational flexibility to operate its shell and tube heat exchanger vaporizers in the open-loop (6 days to offload at 0.5 Bcfd) or closed-loop mode (7.5 days to offload at 0.4 Bcfd). EPA’s estimate of pollutant discharges from this facility can be found in Table 4 of a memorandum entitled, “Overview of Liquefied Natural Gas (LNG) Import Terminals for CWA Section 304(m) Effluent Guidelines Planning”, dated August 19, 2004 (Johnston, 2004).

**Table 20-1. Existing Land-Based and Offshore LNG Import Terminals**

| Location                                | 2004 LNG Imports (Bcf) | 2006 LNG Sendout Capacity (Bcfd) | LNG Storage Capacity (Bcf) | Re-gasification System                              | Operator              |
|---|------------------------|----------------------------------|----------------------------|---|-----------------------|
| Lake Charles, LA (Onshore)              | 163.7 <sup>a</sup>     | 2.1                              | 6.3                        | Closed-Loop: SCV                                    | Southern Union        |
| Cove Point, MD (Onshore)                | 209.3                  | 1.0                              | 5.0                        | Closed-Loop: SCV                                    | Dominion              |
| Everett, MA (Onshore)                   | 173.8                  | 1.035                            | 3.5                        | Closed-Loop: SCV                                    | Distrigas (SUEZ)      |
| Elba Island, GA (Onshore)               | 105.2                  | 1.2 <sup>e</sup>                 | 4.0 <sup>e</sup>           | Closed-Loop: SCV                                    | El Paso/ Southern LNG |
| Gulf of Mexico Energy Bridge (Offshore) | 6 <sup>b</sup>         | 0.5                              | 0                          | Open-Loop: Shell & Tube Heat Exchanger <sup>c</sup> | Excelerate Energy     |
| Guayanilla Bay, Puerto Rico (Onshore)   | 24 <sup>d</sup>        | 0.1                              | NA                         | Closed-Loop: Shell & Tube Heat Exchanger            | EcoElectrica, LP      |

Sources: *U.S. Natural Gas Importers by Point of Entry: Liquefied Natural Gas Volumes* (EIA, 2006b); Figure 20-3; *U.S. LNG Markets and Uses: June 2004 Update* (EIA, 2004); Application for Deepwater Port Liscence (El Paso Energy Bridge GOM LLC, 2002); E-mail communication between Andy Flower and Karrie-Jo Shell, U.S. EPA Region 4 (Flower, 2006a); Spreadsheet attachment to E-mail communication between Andy Flower and Karrie-Jo Shell, U.S. EPA Region 4 (Flower, 2006b); Final Environmental Assessment of the El Paso Energy Bridge Gulf of Mexico LLC Deepwater Port Liscence Application (USCG, 2003).

<sup>a</sup>Sendout capacity for Lake Charles includes a 0.6 Bcfd expansion approved by FERC (FERC, 2006a). This expansion is expected online mid-2006 (Panhandle Energy, 2006).

<sup>b</sup>Available for 2005 only as this facility delivered its first LNG load of nearly 3 Bcf on April 6, 2005 (Excelerate Energy, LLC, 2005). Estimated on the basis of two deliveries and the capacity of the ships used by Excelerate Energy (roughly 3 Bcf) (Pan EurAsian Enterprises, Inc., 2006; Excelerate Energy, LLC, 2005).

<sup>c</sup>This terminal is licensed for operation in the Gulf of Mexico in the open-loop mode and has the operational flexibility to operate its shell and tube heat exchanger vaporizers in the open-loop (6 days to offload at 0.5 Bcfd) or closed-loop mode (7.5 days to offload at 0.4 Bcfd) (USCG, 2003).

<sup>d</sup>Available for 2002 only (EIA, 2003).


<sup>e</sup>The Elba Island facility has applied for FERC authorization to expand sendout and storage capacity (FERC, 2006b).

NA – Not available; Information was not available at time of Final 2006 Plan.

SCV – Submerged combustion vaporizer.

FERC

## Existing and Proposed North American LNG Terminals

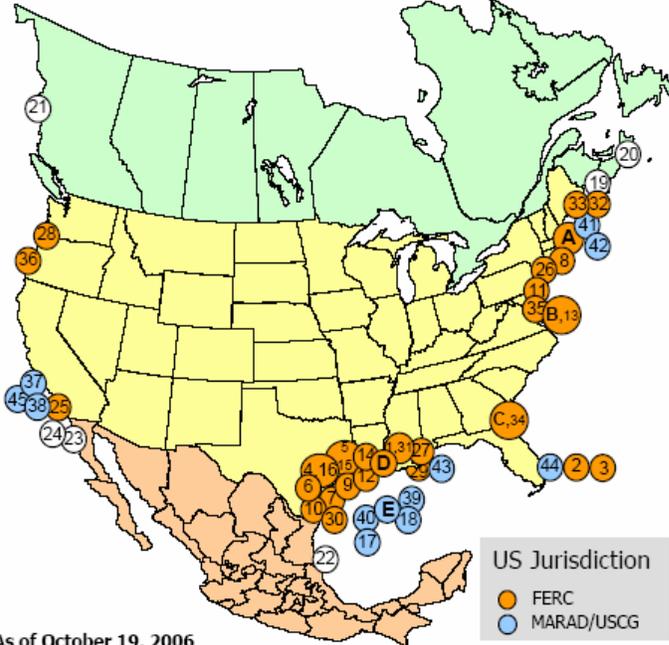

As of October 19, 2006

\* US pipeline approved; LNG terminal pending in Bahamas  
 \*\* Construction suspended

Office of Energy Projects

**CONSTRUCTED**

- A. Everett, MA : 1.035 Bcfd (SUEZ/Tractebel - DOMAC)
- B. Cove Point, MD : 1.0 Bcfd (Dominion - Cove Point LNG)
- C. Elba Island, GA : 1.2 Bcfd (El Paso - Southern LNG)
- D. Lake Charles, LA : 2.1 Bcfd (Southern Union - Trunkline LNG)
- E. Gulf of Mexico: 0.5 Bcfd (Gulf Gateway Energy Bridge - Excelerate Energy)

**APPROVED BY FERC**

- 1. Hackberry, LA : 1.5 Bcfd (Cameron LNG - Sempra Energy)
- 2. Bahamas : 0.84 Bcfd (AES Ocean Express)\*\*
- 3. Bahamas : 0.83 Bcfd (Calypto Tractebel)\*\*
- 4. Freeport, TX : 1.5 Bcfd (Cheniere/Freeport LNG Dev.)
- 5. Sabine, LA : 2.6 Bcfd (Sabine Pass Cheniere LNG)
- 6. Corpus Christi, TX: 2.6 Bcfd (Cheniere LNG)
- 7. Corpus Christi, TX : 1.1 Bcfd (Vista Del Sol - ExxonMobil)
- 8. Fall River, MA : 0.8 Bcfd (Weaver's Cove Energy/Hess LNG)
- 9. Sabine, TX : 2.0 Bcfd (Golden Pass - ExxonMobil)
- 10. Corpus Christi, TX: 1.0 Bcfd (Ingleside Energy - Occidental Energy Ventures)
- 11. Logan Township, NJ : 1.2 Bcfd (Crown Landing LNG - BP)
- 12. Port Arthur, TX: 3.0 Bcfd (Sempra)
- 13. Cove Point, MD : 0.8 Bcfd (Dominion)
- 14. Cameron, LA: 3.3 Bcfd (Creole Trail LNG - Cheniere LNG)
- 15. Sabine, LA: 1.4 Bcfd (Sabine Pass Cheniere LNG - Expansion)
- 16. Freeport, TX: 2.5 Bcfd (Cheniere/Freeport LNG Dev. - Expansion)

**APPROVED BY MARAD/COAST GUARD**

- 17. Port Pelican: 1.6 Bcfd (Chevron Texaco)
- 18. Louisiana Offshore : 1.0 Bcfd (Gulf Landing - Shell)
- 19. St. John, NB : 1.0 Bcfd (Canaport - Irving Oil)
- 20. Point Tupper, NS : 1.0 Bcfd (Bear Head LNG - Anadarko)
- 21. Kitimat, BC: 0.61 Bcfd (Galveston LNG)

**CANADIAN APPROVED TERMINALS**

- 22. Altamira, Tamulipas : 0.7 Bcfd (Shell/Total/Mitsui)
- 23. Baja California, MX : 1.0 Bcfd (Energy Costa Azul - Sempra)
- 24. Baja California - Offshore : 1.4 Bcfd (Chevron Texaco)

**PROPOSED TO FERC**

- 25. Long Beach, CA : 0.7 Bcfd, (Mitsubishi/ConocoPhillips - Sound Energy Solutions)
- 26. LI Sound, NY: 1.0 Bcfd (Broadwater Energy - TransCanada/Shell)
- 27. Pascagoula, MS: 1.5 Bcfd (Gulf LNG Energy, LLC)
- 28. Bradwood, OR: 1.0 Bcfd (Northern Star LNG - Northern Star Natural Gas LLC)
- 29. Pascagoula, MS: 1.3 Bcfd (Casotte Landing - ChevronTexaco)
- 30. Port Lavaca, TX: 1.0 Bcfd (Calhoun LNG - Gulf Coast LNG Partners)
- 31. Hackberry, LA : 1.15 Bcfd (Cameron LNG - Sempra Energy - Expansion)
- 32. Pleasant Point, ME : 2.0 Bcfd (Quoddy Bay, LLC)
- 33. Robbinston, ME: 0.5 Bcfd (Downeast LNG - Kestrel Energy)
- 34. Elba Island, GA : 0.9 Bcfd (El Paso - Southern LNG)
- 35. Baltimore, MD: 1.5 Bcfd (AES Sparrows Point - AES Corp.)
- 36. Coos Bay, OR: 1.0 Bcfd (Jordan Cove Energy Project)

**PROPOSED TO MARAD/COAST GUARD**

- 37. Offshore California : 1.5 Bcfd (Cabrillo Port - BHP Billiton)
- 38. Offshore California : 0.5 Bcfd, (Clearwater Port LLC - NorthernStar NG LLC)
- 39. Offshore Louisiana : 1.0 Bcfd (Main Pass McMoRan Exp.)
- 40. Gulf of Mexico: 1.5 Bcfd (Beacon Port Clean Energy Terminal - ConocoPhillips)
- 41. Offshore Boston: 0.4 Bcfd (Neptune LNG - SUEZ LNG)
- 42. Offshore Boston: 0.8 Bcfd (Northeast Gateway - Excelerate Energy)
- 43. Gulf of Mexico: 1.4 Bcfd (Blenville Offshore Energy Terminal - TORP)
- 44. Offshore Florida: ? Bcfd (SUEZ Calypso - SUEZ LNG)
- 45. Offshore California: 1.2 Bcfd (OceanWay - Woodside Natural Gas)

Figure 20-2. Existing and Proposed North American LNG Terminals (FERC, <http://www.ferc.gov/industries/lng.asp>)

Approved LNG Import Terminals

There are 17 approved LNG import terminals in the U.S. Table 20-2 and Figure 20-2 present more detailed information about each of these facilities.

- **Onshore:** In addition to the five existing onshore facilities, sixteen onshore terminals or expansions of existing terminals have been approved for operation by FERC. These land-based terminals propose to use closed-loop re-gasification technologies. EPA did not identify any significant pollutant discharges associated with the re-gasification processes at these facilities as compared to facilities with open-loop re-gasification.

- **Offshore:** In addition to the one existing offshore facility, only one offshore terminal is currently licensed for operation.<sup>1</sup> However, the operator has yet to start construction on the terminal (Gulf Landing). The Gulf Landing LNG import terminal is proposing to use an open loop re-gasification technology (open rack vaporizers). EPA’s estimate of pollutant discharges from this facility can be found in Table 4 of a memorandum entitled, “Overview of Liquefied Natural Gas (LNG) Import Terminals for CWA Section 304(m) Effluent Guidelines Planning”, dated August 19, 2004 (Johnston, 2004).

#### *Proposed LNG Import Terminals*

There are 23 proposed LNG import terminals in the U.S. Table 20-3, Table 20-4, and Figure 20-2 present more detailed information about each of these facilities.

- **Onshore:** As of November 9, 2006, 13 onshore are awaiting FERC approval of their license application to operate. These land-based terminals propose to use closed-loop re-gasification technologies. EPA did not identify any significant pollutant discharges associated with the re-gasification processes at these facilities as compared to facilities with open-loop re-gasification.
- **Offshore:** As of November 9, 2006, 10 offshore terminals are awaiting regulatory approval of their license application to operate (U.S. Coast Guard in Federal waters and FERC in State waters).<sup>2</sup> EPA has learned that only one operator is proposing to use open-loop re-gasification technology (Bienville Offshore Energy Terminal). The remaining nine terminals are proposing to use closed-loop re-gasification technologies.

#### *Planned LNG Import Terminals*

There are eight planned LNG import terminals in the U.S. Figure 20-3 presents the potential facilities. As of November 9, 2006, five onshore and three offshore terminals are planned, but have not yet applied for a license to operate. Details on these terminals are not available at the time of the Final 2006 Plan.

---

<sup>1</sup> EPA notes that one operator has indefinitely suspended activities to construct an offshore terminal that received approval for its Deepwater Port Act license (Port Pelican). See 70 FR 57885 (4 October 2005).

<sup>2</sup> EPA also notes that three applicants have withdrawn their Deepwater Port Act license application for their offshore terminals (Brinkmann, P.E., 2005; Cornelius, 2006a; Cornelius, 2006b).

Table 20-2. Approved U.S. Land-Based LNG Import Terminals

| No. | Project Name/ Operator/ FERC Docket No.  | Location                                     | Storage Capacity  | Sendout Capacity                          | Vaporizer Design   | LNG Ship Frequency   |
|-----|--|--|---|---|--|--|
| 1   | Freeport LNG Project<br>Cheniere/Freeport<br>CP03-75-000 (Phase I)<br>CP05-361-000 (Phase II)<br>Phase I:<br>\$400 million facility cost | Freeport, TX                                 | Phase I:<br>320,000 cubic meters (m <sup>3</sup> ) (2 tanks each with 160,000 m <sup>3</sup> )<br>Phase II:<br>480,000 cubic meters (m <sup>3</sup> ) (3 tanks each with 160,000 m <sup>3</sup> ) | Phase I: 1.5 Bcf/d<br>Phase II: 4.0 Bcf/d | Closed-Loop:<br>Air heat exchanger (heating tower)<br>Supplemental gas-fired heater for cold weather | Phase I: 200 ships/year<br>Phase II: 400 ships/year                                |
| 2   | Sabine Pass LNG and Pipeline Project<br>Cheniere<br>CP04-38-000<br>CP04-47-000<br>\$600 million facility cost                            | Cameron Parish, LA (across from Sabine Pass) | 480,000 m <sup>3</sup> (3 tanks each with 160,000 m <sup>3</sup> )  | 2.6 Bcf/d                                 | Closed-Loop:<br>Gas-fired heater   | 300 ships/year   |
| 3   | Cheniere Corpus Christi LNG Terminal and Pipeline Project<br>Cheniere<br>CP04-37-000<br>CP04-44-000<br>\$450 million facility cost       | Corpus Christi, TX                           | 480,000 m <sup>3</sup> (3 tanks each with 160,000 m <sup>3</sup> )  | 2.6 Bcf/d                                 | Closed-Loop:<br>Gas-fired heater   | 300 ships/ year  |
| 4   | Golden Pass LNG Terminal and Pipeline Project<br>ExxonMobil<br>PF04-1-000<br>\$600 million facility cost                                 | Sabine, TX                                   | Phase I: 480,000 m <sup>3</sup> (3 160,000 m <sup>3</sup> tanks)<br>Phase II: 800,000 m <sup>3</sup> (5 160,000 m <sup>3</sup> tanks)   | Phase I: 1 Bcf/d<br>Phase II: 2 Bcf/d     | Closed-Loop:<br>Gas-fired heater   | Phase I: 1 ship/4 days (91 ships/year)<br>Phase II: 1 ship/2 days (183 ships/year) |
| 5   | Vista del Sol LNG Terminal Project<br>ExxonMobil<br>PF04-3-000<br>PF04-9-000<br>\$600 million facility cost                              | Corpus Christi, TX                           | 480,000 m <sup>3</sup> (3 tanks each with 160,000 m <sup>3</sup> )  | Phase I: 1 Bcf/d                          | Closed-Loop:<br>Gas-fired heater   | 1 ship/4 days (91 ships/year)  |
| 6   | Ingleside Energy Center LNG Project<br>Occidental<br>PF04-9-000  | Corpus Christi, TX                           | 320,000 m <sup>3</sup> (2 tanks each with 160,000 m <sup>3</sup> )  | 1 Bcf/d                                   | Closed-Loop:<br>Water heat exchanger (waste water from the chemical plant)                           | 1 ship/3 days  |

Table 20-2 (Continued)

| No. | Project Name/ Operator/ FERC Docket No.  | Location           | Storage Capacity   | Sendout Capacity | Vaporizer Design              | LNG Ship Frequency |
|-----|--|--------------------|--|------------------|-------------------------------|--------------------|
| 7   | Cameron LNG, LLC<br>Sempra Energy<br>CP02-374-000<br>CP02-376-000<br>CP02-377-000<br>CP02-378-000<br>\$700 million facility cost | Hackberry, LA      | 480,000 m <sup>3</sup> (3 tanks each with 160,000 m <sup>3</sup> ) | 1.5 Bcf/d        | Closed-Loop                   | 210 ships/year     |
| 8   | Weaver's Cove LNG<br>CP04-36-000<br>\$250 million facility cost  | Fall River, MA     | 200,000 m <sup>3</sup> (1 tank)                                    | 0.4 Bcf/d        | Closed-Loop: Gas-fired heater | 50-70 ships/ year  |
| 9   | Creole Trail LNG<br>Cheniere LNG<br>PF05-8   | Cameron, LA        | 640,000 m <sup>3</sup>   | 3.3 Bcf/d        | Closed-Loop: Gas-fired heater | 300-400 ships/year |
| 10  | Port Arthur LNG Receiving Terminal Project<br>Sempra<br>Docket No. PF04-11-000   | Port Arthur, TX    | 480,000 m <sup>3</sup> (3 tanks each with 160,000 m <sup>3</sup> ) | 1.5 Bcf/d        | Closed-Loop: Gas-fired heater | 150 ships/year     |
| 11  | BP Crown Landing LNG<br>PF04-2-000<br>PF04-5-000<br>\$500 million facility cost  | Logan Township, NJ | 450,000 m <sup>3</sup>   | 1.2 Bcf/d        | Closed-Loop: Gas-fired heater | 100 ships/year     |

Source: Dockets for each project available at <http://elibrary.ferc.gov/industries/lng/indus-act/terminals/exist-prop-lng.asp>; EIA's Current View on LNG Imports into the United States (Martin, 2004).

Note: Not listed in this table are expansions at existing or other approved terminals, and two terminals to be sited in the Bahamas.

Table 20-3. Proposed U.S. Land-Based LNG Import Terminals

| No. | Project Name/ Operator/ FERC Docket No.   | Location           | Storage Capacity       | Sendout Capacity | Vaporizer Design                                 | LNG Ship Frequency |
|-----|---|--------------------|------------------------|------------------|--|--------------------|
| 1   | Sound Energy Solutions<br>Mitsubishi/ConocoPhillips<br>PF03-06 and PF04-58 (see FR Vol. 69, No. 27, p. 6277-6278) | Long Beach, CA     | 320,000 m <sup>3</sup> | 1.0 Bcf/d        | Closed Loop: Shell and tube gas-fired vaporizers | 120 ships/year     |
| 2   | Gulf Energy<br>Gulf Energy LNG LLC<br>PF05-05 (see FR Vol. 70, No. 46, p. 11960-11961)                            | Pascagoula, MS     | 320,000 m <sup>3</sup> | 1.0 Bcf/d        | Not specified                                    | 115 ships/year     |
| 3   | Northern Star LNG<br>Northern Star Natural Gas, LLC<br>PF05-10 (see FR Vol. 70, No. 181, p. 55123-55125)          | Bradwood, OR       | 320,000 m <sup>3</sup> | 1.0 Bcf/d        | Closed-Loop: Ambient air vaporizers              | 125 ships/year     |
| 4   | Casotte Landing<br>Chevron<br>PF05-09 (see FR Vol. 70, No. 70, p. 19433-19435)                                    | Pascagoula, MS     | 480,000 m <sup>3</sup> | 1.3 Bcf/d        | Closed-Loop: Refinery cooling water              | 166 ships/year     |
| 5   | Calhoun LNG<br>Gulf Coast LNG Partners<br>CP05-91 (see FR Vol. 70, No. 148, p. 44616-44618)                       | Port Lavaca, TX    | 320,000 m <sup>3</sup> | 1.0 Bcf/d        | Not specified                                    | 120 ships/year     |
| 6   | Pleasant Point<br>Quoddy Bay, LLC<br>PF06-11 (see FR Vol. 71, No. 54, p. 14200-14203)                             | Pleasant Point, ME | 480,000 m <sup>3</sup> | 0.5 Bcf/d        | Closed-Loop: Gas-fired heater                    | 90 ships/year      |
| 7   | Downeast LNG<br>Kestrel Energy<br>PF06-13 (see FR Vol. 71, No. 54, p.14196-14198)                                 | Robbinston, ME     | 160,000 m <sup>3</sup> | 0.5 Bcf/d        | Closed-Loop: Gas-fired heater                    | 50 ships/year      |

Source: Dockets for Port Arthur, BP Crown Landing, and Creole Trail are available at <http://elibrary.ferc.gov/industries/lng/indus-act/terminals/exist-prop-lng.asp>; Notice of Intent from Federal Register Notices as presented in the table and 71 FR 30128-30129, May 25, 2006 for Casotte Landing; EIA's Current View on LNG Imports into the United States (Martin, 2004).

Note: Not included here are the most recently proposed LNG terminals in Sparrows Point, Baltimore, MD, and Coos Bay, OR (see Figure 20-3) and expansions at existing or approved facilities. Also does not include a terminal to be located in Long Island Sound, which considered an offshore terminal and is presented in Table 20-4.

**Table 20-4. Licensed and Proposed U.S. Offshore LNG Import Terminals**

| No. | Company<br>(Facility Name)  | Offshore Location  | Proposed Re-gasification System   | USCG Deepwater Port Licensing Information (Docket No.) <sup>a</sup> |
|-----|---|--|-----------------------------------|---|
| 1   | Shell<br>(Gulf Landing) (DPA License Issued)                          | West Cameron Block 213 - GOM<br>38 miles south of LA   | Open-Loop: ORV                    | Yes<br>(16860)  |
| 2   | BHP Billiton<br>(Cabrillo Port) (Proposed)                            | Offshore Oxnard, CA<br>14 miles from CA  | Closed-Loop:<br>SCV               | Yes<br>(16877)  |
| 3   | Freeport Energy<br>(Main Pass Energy Hub) (Proposed)                  | Main Pass Block 299 - GOM<br>16 miles from LA  | Closed-Loop:<br>SCV               | Yes<br>(17696)  |
| 4   | Crystal Energy<br>(Clearwater Port) (Proposed)                        | Offshore Ventura County, CA<br>12.6 miles from CA  | Closed-Loop:<br>SCV               | Yes<br>(TBD)  |
| 5   | Excelerate Energy<br>(Northeast Gateway) (Proposed)                   | Offshore MA<br>13 miles south-southeast of Gloucester, MA                                    | Closed-Loop:<br>Shell and Tube    | Yes<br>(22219)  |
| 6   | SUEZ<br>(Neptune LNG) (Proposed)                                      | Offshore MA<br>22 miles northeast of Boston, MA  | Closed-Loop:<br>Shell and Tube    | Yes<br>(22611)  |
| 7   | TransCanada/Shell<br>(Broadwater Energy) (Proposed)                   | Long Island Sound, NY<br>9 miles from NY and 11 miles from CT                                | Closed-Loop:<br>Shell and Tube    | No (FERC lead, see Docket Numbers PF05-04 and CP06-54)              |
| 8   | SUEZ<br>(Calypso Energy) (Proposed)                                   | Offshore FL<br>10 miles east of Port Everglades, FL  | Closed-Loop:<br>Shell and Tube    | Yes<br>(TBD)  |
| 9   | TORP Technology AS<br>(Bienville Offshore Energy Terminal) (Proposed) | Main Pass Block 258 - GOM<br>63 miles south of Dauphin Island, AL                            | Open-Loop: Hi-Load Shell and Tube | Yes<br>(24644)  |
| 10  | Woodside Natural Gas<br>(OceanWay Secure Energy)                      | Offshore Los Angeles, CA<br>28.3 miles from CA   | Closed-Loop: Air Heat Exchange    | Yes<br>(TBD)  |
| 11  | Atlantic Sea Island Group LLC<br>(Safe Harbor Energy)                 | Offshore NY/NJ<br>13.5 miles south of Long Beach, NY and<br>19 miles east of Sandy Hook, NJ. | Closed-Loop: Air Heat Exchange    | Yes<br>(TBD)  |

<sup>a</sup>Indicates whether the company has applied for a deepwater port license.

The USCG docket for each Deepwater Port license application can be accessed using the docket number and the following website: <http://www.uscg.mil/hq/g-m/mso/mso5.htm>. This table was compiled using documents available on the USCG docket, with the following exceptions: (1) information about Clearwater Port is from presentations and press releases, most of which are available at <http://www.crystallenergyllc.com>; (2) Broadwater Energy is from <http://www.broadwaterenergy.com/>; (3) Calypso Energy is from <http://www.suez.com/upload/up1527.pdf> and Calypso LNG LLC, Deepwater Port License Application (Public), Volume I, Calypso LNG Project, Page 3, February 2006; (4) the vaporizer technology for Woodside OceanWay Secure Energy came from <http://www.oceanwaysecureenergy.com/marinelife.html>. Additionally, the Port Pelican, Pearl Crossing, Compass Port, and Beacon Port LNG import terminals are not included in this table. Port Pelican's licensee suspended construction activities (Poten & Partners, 2004) (70 FR 57885; 4 October 2005). Pearl Crossing, Compass Port, and Beacon Port all withdrew their Deepwater Port Act license applications (70 FR 73059, 8 December 2005; Brinkmann, 2005; Cornelius, 2006b). The Atlantic Sea Island Group proposes to construct a man-made island about 13.5 miles offshore southern side of LI, New York, in approximately 60 feet of water in the Atlantic Ocean. The facility-proposed design will include four 180,000 m<sup>3</sup> storage tanks with a send-out capacity of 2 Bcf/d and a proposed in-service date of 2010 (source: <http://www.safeharborenergy.com/>, Final Environmental Impact Statement for the Crown Landing LNG Project and Logan Lateral Project, FERC Docket Nos. CP04-411-000 and CP04-416-000, TABLE 3.2.2-2, [http://www.marad.dot.gov/DWP/LNG/port\\_news/news\\_detail.asp?ID=25&from=home](http://www.marad.dot.gov/DWP/LNG/port_news/news_detail.asp?ID=25&from=home)).

Note: This table does not include the Tidelands Oil & Gas Esperanza Energy or Excelerate's Pacific or Southeast Gateway offshore LNG import terminals as these facilities have not applied for a Deepwater Port operation license. The Esperanza Energy is focusing its evaluation on several potential sites up to 12 miles offshore of the greater Long Beach area and use of the open-loop (Hi-Load Shell and Tube) re-gasification technology (California Energy Commission, 2006). Excelerate's Pacific and Southeast Gateway LNG import terminals will use a similar design as Excelerate Energy's other LNG import terminals and these two terminals are planned for development off of the coasts of Northern California and Florida, respectively (California Energy Commission, 2006; <http://www.excelerateenergy.com/activities.php>).


TBD – To be determined.

ORV – Open-rack vaporizers.

SCV – Submerged combustion vaporization.

FERC

## Potential North American LNG Terminals

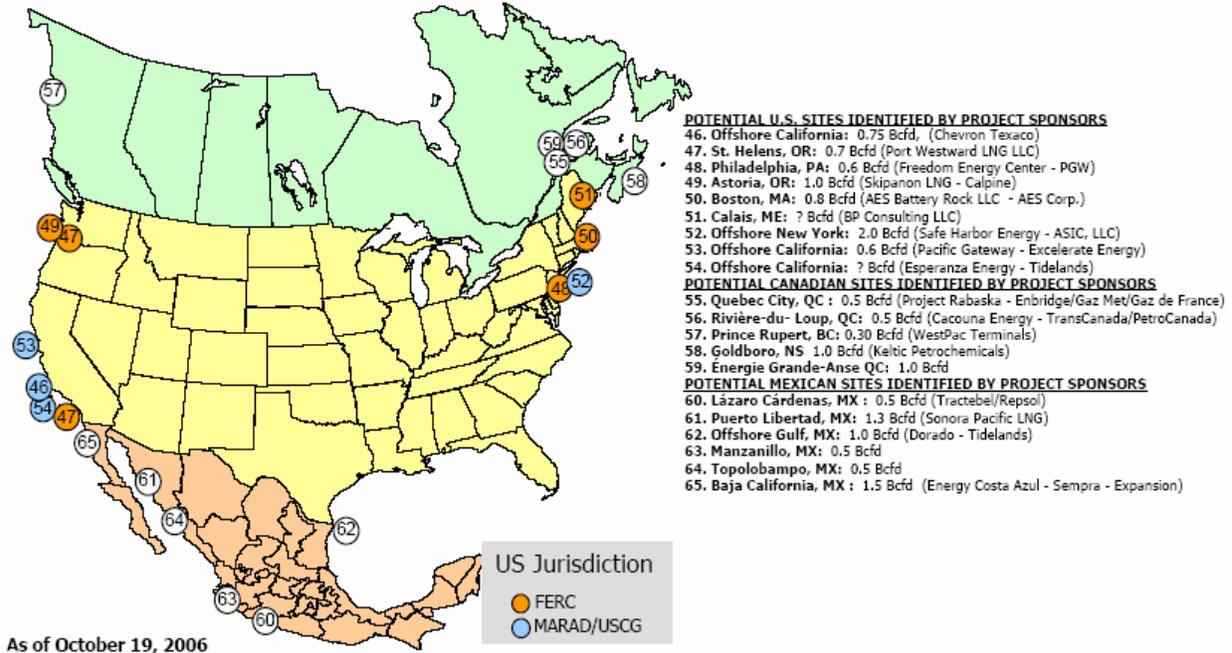

Office of Energy Projects


Figure 20-3. Potential North American LNG Terminals  
 (FERC, <http://www.ferc.gov/industries/lng.asp>)

**Table 20-5. Existing, Approved, Proposed and Planned U.S. LNG Import Terminals (2006)**

| Status            | Total Throughput (Bcf/d) | Annual Throughput (tcf/yr) | Percentage of Total |
|-------------------|--------------------------|----------------------------|---------------------|
| Existing          | 5.84                     | 2.13                       | 9.80%               |
| Approved (FERC)   | 25.30                    | 9.23                       | 42.5%               |
| Approved (CG)     | 1.60                     | 0.58                       | 2.70%               |
| Proposed (FERC)   | 13.55                    | 4.95                       | 22.8%               |
| Proposed (CG)     | 10.30                    | 3.21                       | 14.8%               |
| Planned (FERC/CG) | 4.45                     | 1.62                       | 7.5%                |
| <b>Total</b>      | <b>61.04</b>             | <b>22.27</b>               | <b>100%</b>         |

Source: Existing LNG Terminals (FERC, 2006a); Existing LNG Terminals (FERC, 2006c).

Note: Table includes only planned facilities as of as of November 9, 2006 where a throughput estimate is available. The Port Pelican, Pearl Crossing, Compass Port, and Beacon Port LNG import terminals are not included in this table. Port Pelican's licensee has indefinitely suspended construction activities (Poten & Partners, 2004) (70 FR 57885; 4 October 2005). Pearl Crossing, Compass Port, and Beacon Port withdrew their Deepwater Port Act license applications (see 70 FR 73059, 8 December 2005; Brinkmann, 2005; Cornelius, 2006a, Cornelius, 2006b).

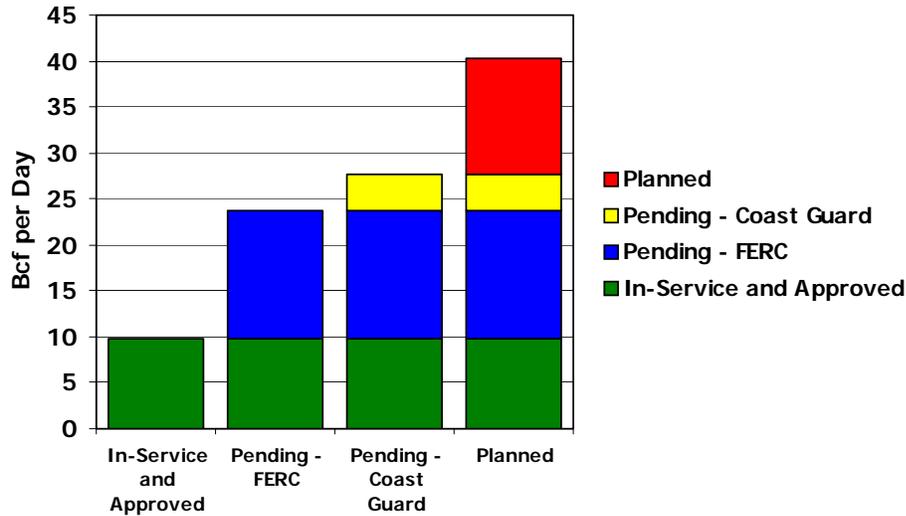

**Figure 20-4. Existing and Proposed North American LNG Terminals (FERC, 2004)**

#### 20.1.4 Economic Profile

United States and foreign companies are competing to build LNG import terminals in many regions of North America because of the perceived opportunity in the growing LNG industry (Kelly, 2004). According to industry analysts, the cost of LNG at the point of U.S. delivery is approximately \$3/MMBtu (Greenspan, 2005). Below is a rough breakdown of this cost (Economides, 2005):

- \$1/MMBtu is the cost of the feedstock gas at the exporting location;
- \$1/MMBtu is the cost to liquefy the gas;
- \$0.30/MMBtu is the cost to regasify the LNG (open-loop) or \$0.375/MMBtu (closed-loop);<sup>3</sup> and
- \$1/MMBtu is the cost to transport the LNG.<sup>4</sup>

<sup>3</sup> EPA estimated the incremental cost of using closed-loop regasification instead of open-loop (i.e., \$0.375 - \$0.300 = \$0.075 MMBtu), based on information from the Gulf Landing facility. EPA assumed a \$5.00/MMBtu price of gas in 2009 (when Gulf Landing comes on-line) through 2029, and assumed the higher end of the incremental gas usage found in the literature (increment of 1.5 percent of the LNG cargo). EPA then estimated that the additional energy cost to Gulf Landing for the closed-loop regasification system (\$27.4 million in 2009) is the major cost differential between open-loop and closed-loop regasification. In 2010, therefore, the operating cost differential between open-loop and closed-loop regasification for this facility might be roughly \$0.075/MMBtu processed (= \$27.4 million/365 million MMBtu).

<sup>4</sup> This is a conservative estimate for the transportation of LNG to the United States, as the longer the distance of the LNG supply to the United States, the higher the shipping costs. Approximately, 0.25 percent of the LNG is consumed in transit due to the “boil-off” process, which is necessary for maintaining LNG temperature.

The long-range U.S. wellhead price of gas expected through 2030 ranges roughly from \$4.00-\$6.00/MMBtu in 2004 dollars (EIA, 2006a).

### *Financing Models for LNG Import Terminals*

An important factor in evaluating the potential economic impact of various pollutant control technologies (e.g., using closed-loop re-gasification in lieu of open-loop re-gasification) is to identify whether the LNG import terminal operates at a profit (profit center) or at cost (or loss) in support of a larger, profit-making line (cost center). Profit centers are analyzed at the facility level; since changes in cash flow can be properly interpreted (a change from positive to negative cash flow due to a rule is usually counted as a regulatory closure). Cost centers (or captive facilities, for which some or all revenues are accounted for higher up in the corporate structure) cannot be analyzed at the facility level; impact must be measured at a higher level in the corporate hierarchy. At the higher level, a rule-induced change from positive cash flow to negative cash flow or change in profitability considered significant denotes a regulatory closure or other impact. This economic analysis reviewed the four basic financing models by which LNG terminals might operate (Chinloy, 2005):

- **Tolling:** A fixed fee is charged and the supply of LNG is set through contracts. The fixed fee typically covers the capital and operating costs, while allowing for reasonable returns on investment. Land-based facilities such as the Lake Charles LNG import terminal include as part of their fee a percentage of gas to operate their closed loop re-gasification system. Tolling is the preferred approach for most U.S. LNG terminals (Chinloy, 2005). This type of facility is a stand-alone operation (i.e., profit center).
- **Integrated:** Contracts or integrated investments establish a chain of LNG supply. Integrated investments have recently been used by integrated majors, e.g., Shell's Gulf Landing, LNG import terminal. This model may entail linkages from production, through liquefaction, transportation, re-gasification, and distribution. The integrated investments approach is becoming more prevalent in the United States. This type of facility is likely to be a cost center.
- **Rate-based:** The terminal is owned by a regulated utility (e.g., gas distribution or electric). This type of facility is likely to be a cost center.
- **Merchant:** The terminal operates primarily without contracts in place. It is subject to substantial volume and price risk (Chinloy, 2005). This model is unlikely to be able to arrange financing (Chinloy, 2005). This type of facility is a stand-alone operation (i.e., profit center).

This economic impact analysis considered the two most prevalent and applicable factors to determine which business model—tolling or integrated— is more applicable for various LNG import terminals operated by large, integrated oil and gas firms:


- The tolling model in which a company acts as a service provider with tolling arrangements provides much lower returns on investment than those from the integrated model (Deutsche Bank, 2005).
- An integrated model allows operators to take advantage of significant price differentials (arbitrage) between foreign gas prices or the cost of producing gas in foreign locations and the price of gas in the United States (or elsewhere in the LNG importing regions of the world). These differentials, even with the cost of liquefaction, transport, and re-gasification, are significant and can provide enormous profits.

For example, the operating earnings for an integrated model on each MMBtu are estimated to total \$1.70 (\$5.00 price of gas in the United States minus the \$3.30 anticipated cost of delivering gas via LNG importation, assuming that open-loop re-gasification technology is used). This is a 34.0 percent operating margin. With closed-loop re-gasification technology, an additional 1.5 percent of gas throughput is used, costing \$0.075 ( $\$5.00 \times 0.015 = \$0.075$ ); thus, the earnings per MMBtu are slightly smaller ( $\$1.625 = \$1.70 - \$0.075$ ), representing a 32.6 percent margin. It appears that, to the extent possible, most LNG import terminals owned by integrated majors would process their own LNG and that stand-alone profitability would unlikely be the main objective of the terminals' operation.

#### *Number of New Facilities Expected*

EPA considered whether the potential growth of this industrial sector might add significantly to the estimate of facilities requiring NPDES permits with effluent limits for open-loop re-gasification wastewaters. EPA examined whether the present trend of LNG import terminal proposals will continue or expand (see Figures 20-2 and 20-3). EPA concluded that, for several reasons, the significant growth in LNG import terminal proposals would most likely not continue at the pace shown in recent years. The major factors limiting the importation of LNG to the U.S. consumer include not the lack of LNG re-gasification terminals in the United States, but the following economic and supply-side related issues:

- Most industry analysts note that over-capacity is a major issue for this industrial sector (Deutsche Bank, 2005; A.G. Edwards, 2005; Credit Suisse First Boston, 2005; Citigroup Smith Barney, 2004; EIA, 2006a; EIA, 2006b; ERG, 2006; Chinloy, 2005). In 2005, the existing terminals operated only at 40 percent capacity (GPO, 2005) and capacity utilization is expected to remain roughly in the 50 percent to 70 percent range (Deutsche Bank, 2005; see Figure 20-5) over the next decade or longer, even while demand for LNG grows and several new LNG terminals are constructed.

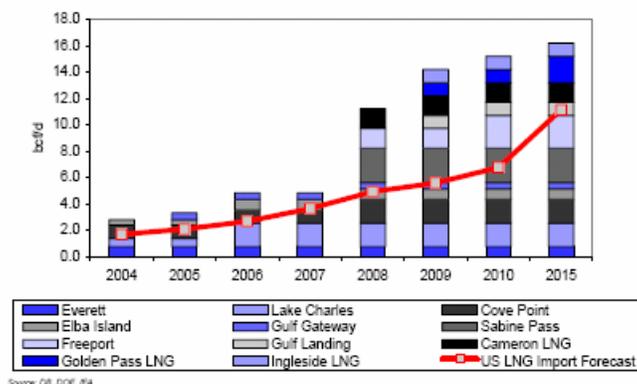

**Figure 20-5. Excess Regas Capacity in the U.S.—Here to Stay**  
(U.S. DOE, EIA, as cited in Deutsche Bank, 2005)


- LNG supplies are tight, due to the significantly greater cost of constructing liquefaction infrastructure and political instability in many potential LNG exporting regions (Deutsche Bank, 2005). For example, a shortage of feedstock gas has recently led to a number of global liquefaction projects operating at less than full capacity due to, among other things, declining reserves and political unrest in LNG-producing countries (LNGLawblog, 2006e). This constraint in liquefaction capacity, not re-gasification terminal capacity, will remain a major constraint for North American LNG imports (North American National Gas Group, 2005).
- Demand for natural gas worldwide is growing (EIA, 2006b), particularly in Europe and the Far East, which are also expanding their LNG re-gasification infrastructure (GSI, 2005). EIA indicates that more rapid growth in worldwide demand for natural gas than that predicted in 2005 will reduce the availability of LNG supplies, raise worldwide gas prices, and make LNG less economical in U.S. markets (EIA, 2006b).
- Many other LNG-importing countries have fewer alternatives to LNG for their gas needs and are willing to pay a much higher price than U.S. consumers for that LNG. Price differences between the U.S. and other foreign markets competing for limited LNG supplies are often measured in dollars.<sup>5</sup> It is this price differential that will determine where LNG suppliers send their cargos.<sup>6</sup> LNG owners are diverting cargos from the United States to other more profitable markets. According to FERC, LNG import terminals in the U.S. are “operating at less than 40 percent

<sup>5</sup> For example, the Cove Point LNG terminal in Maryland competed in the global market with a netback of \$6.53/MMBtu for LNG supplier (Trinidad), while Lake Charles yielded only \$5.51/MMBtu, compared to Spain's \$9.02/MMBtu netback (LNGlawblog.com, 2006e).

<sup>6</sup> See the assessment of James W. Duncan, Director of Structured Products for ConocoPhillips Gas & Power, “LNG is a growing and dynamic market, but there are going to be new players in the marketplace, which is going to prohibit and inhibit the amount of LNG that is available to come here. What will drive that market will be price. Molecules flow to dollars. It's not a mystery. I think it has been mentioned that Spain paid the equivalent of \$14/MMBtu last summer...and the molecule [not] surprisingly went there and did not come here. Those price dynamics are coming to fruition” (Rigzone, 2006).

capacity” (Rosenberg, 2006). When asked why, Mr. Kelliher, the FERC chairman, replied, “It’s because we have to compete with foreign demand. LNG comes to this country either by long-term contract or in spot shipments. We’ve been losing out on a lot of spot shipments to Europe. If prices are higher elsewhere, that’s where the spot shipments are going to go . . . The world has twice the capacity to import LNG as it has to make LNG. That gives developers of the liquefaction facilities more choices when it comes to what markets they prefer to use” (Rosenberg, 2006). For example, in November 2005, an LNG transport ship traveling from Nigeria and bound for a U.S. LNG import terminal idled in the Gulf of Mexico for a week - during which prices soared in Europe - before sailing back across the Atlantic Ocean to Spain to unload its cargo (Gold, 2006). More recently, LNG cargos destined for Lake Charles, LA, and Cove Point, MD, were diverted to Mexico and Spain, respectively (LNGlawblog.com, 2006f).

- Last year saw very low imports (GPO, 2006). Platts and industry analysts attribute the low U.S. imports to intense Asian and European competition for LNG coupled with mild winter weather in the United States (LNGlawblog.com, 2006a). Figure 20-6 shows the impacts of U.S. alternatives on LNG imports. Future growth of LNG imports is projected to level out after 2015 as unconventional sources of gas, such as CBM (ENR, 2006) and Alaska gas become more available (EIA, 2006a; EIA, 2006b). Furthermore, several LNG import terminals are planned for Mexico and Canada (Smith, 2005). Gas from these terminals would reach California and New England. Mexico expects to be a net exporter of natural gas to the United States by 2010, or even earlier, as oversupply appears to be developing there (LNGlawblog, 2006b, 2006c).

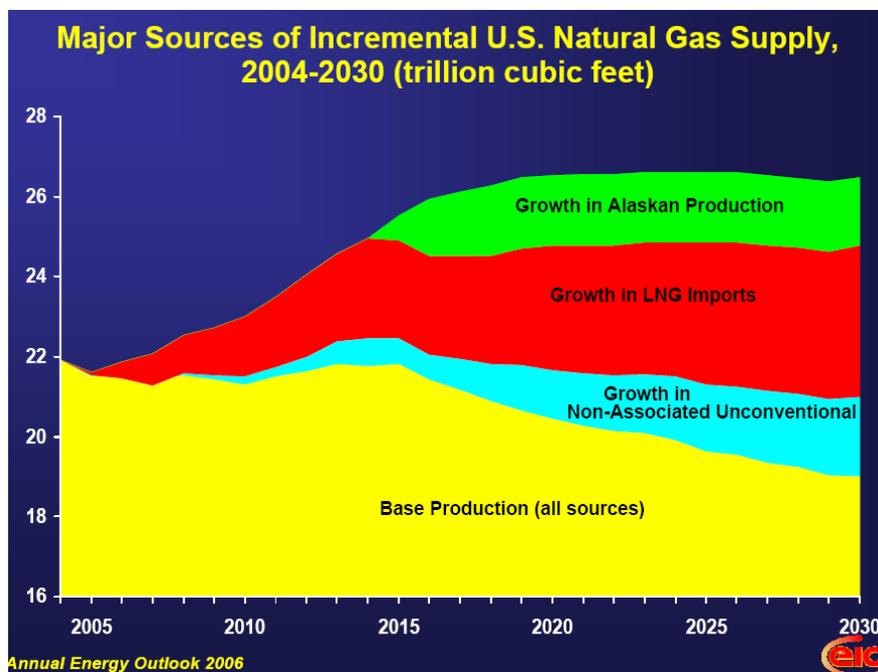

**Figure 20-6. Growth in LNG Imports Given Growth in Alaskan and Unconventional Gas Production (EIA, 2006b)**

Given these economic and supply-side related issues, DOE and others predict that U.S. demand for LNG will constrain imports and that very few of the approved, proposed, or planned terminals will be built over the next 10 years or longer (EIA, 2006a; EIA, 2006b; Deutsche Bank, 2005; A.G. Edwards, 2005; Credit Suisse First Boston, 2005; Citigroup Smith Barney, 2004; Chinloy, 2005; Greenspan, 2005). DOE projects two land-based facilities under construction, two expansions at existing land-based facilities, and four other facilities that will be built. These terminals are expected to serve the Gulf Coast, Southern California, Florida, and New England (EIA, 2006a). Of these four, two might not be U.S.-based (Southern California and New England might be served by terminals currently in advanced planning stages in Mexico and Canada—see Figure 20-3; also see Chinloy, 2005).

In summarizing the current U.S. LNG import terminal market, Chinloy sees expansions at existing facilities, the two terminals under construction, and a third terminal in advanced stages in Mexico (which is planned, in part, to serve Southern California) as leaving a 1.9 Bcfd “gap” in the predicted 28.1 tcf per year of U.S. natural gas demand in 2015 (which is about 80 Bcfd) (Chinloy, 2005). The “gap” is only 2 percent of projected demand for natural gas in 2015. Chinloy sees a need for at most only six additional LNG import terminals in the next 10 years. Given that several approved or proposed terminals would each be larger than this 1.9 Bcfd gap, the next decade may see very few additional terminals being constructed (see Table 5).

Finally, analysts predict a shakeout in LNG terminal plans in the next few years, as those terminals closest to completion send signals to the market that the LNG supply gap has been filled (Van Praet, 2004; NGI, 2006). EPA has already seen four offshore projects, for example, that either had construction activities suspended (Port Pelican) (Poten & Partners,

2004; 70 FR 57885, October 4, 2005), or the applicant has withdrawn the terminal from proposal (Pearl Crossing and Compass Port).

### **20.1.5 Summary of EPA’s Review of the LNG Industry**

Based on its review of the LNG import terminal industry, EPA is not identifying this industry for ELGs rulemaking at this time. First, out of existing LNG import terminals, all but one use closed-loop re-gasification. Discharges from closed-loop re-gasification likely present a low hazard to human health and the environment. Second, out of all of the approved, proposed, or planned LNG import terminals, few are likely to be built due to economic and supply-side issues. Moreover, even fewer are projected to use open-loop re-gasification. As noted above, no potential new onshore facilities and only three possible new offshore LNG import terminals have proposed to use “open-loop” re-gasification. Because the hazard associated with this industry is attributable to only a few facilities (one existing facility and possibly two new facilities), EPA believes that discharges from this industry can best be addressed through case by case BPJ-based permit limits, rather than through a categorical ELGs. BPJ is a particularly appropriate tool where – as here – there is significant site-specific variability in terms of facility design. A BPJ case-by-case approach would enable permit writers to best capture the technical considerations that might influence the identification of the appropriate pollutant control technology and effluent limits.

Therefore, EPA is exercising its discretion to not identify LNG in the 2006 Plan because it does not believe categorical ELGs would be an appropriate tool to regulate discharges from this category. The Supreme Court in *Norton v. Southern Utah Wilderness Alliance* explicitly recognized the importance of Agency discretion over its internal planning processes, finding that the statutory mandate at issue was not sufficiently specific to require the Agency to include certain provisions in its plan. In this case, the CWA requires all NPDES permits to contain technology-based effluent limitations – but also specifically allows those limitations to be developed using best professional judgment under CWA section 402(a)(1), rather than pursuant to ELGs. See CWA section 304(b)(2)(B). Significantly, section 301(b)(3)(B) was enacted contemporaneously with section 304(m) and its planning process, suggesting that Congress contemplated the use of both tools, with the choice of tools in any given 304(m) plan left to the Administrator’s discretion. Like the statutory mandate in *Norton*, the CWA requirement that EPA develop an effluent guidelines plan – when coupled with the direction to establish technology-based limitations either through ELGs or site-specific BAT decision-making – cannot be read to constrain the Agency’s discretion over what it includes in its plan.

### **20.2 Miscellaneous Foods and Beverages Industry**

During its 2005 annual review, EPA identified 26 SIC codes related to the manufacture of a variety of food and beverage products that were not covered by any existing ELGs. EPA found that industries in these 26 SIC codes were properly considered a potential new stand-alone category based on the similarity of products produced as well as the similarity of their operations and wastewater characteristics. EPA’s finding is supported by the fact that EPA had previously considered many of these industries to be part of a stand-alone category – the Miscellaneous Foods and Beverages Point Source Category – when it began ELGs rulemaking for this industry in the 1970s.

EPA’s analysis of this industry for its 1970’s rulemaking is detailed in its “Draft Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Miscellaneous Foods and Beverages Point Source Category” (U.S. EPA, 1975a). At that time, EPA determined it was appropriate to subcategorize the industry into five segments: vegetable oil processing and refining; beverages; bakery and confectionary products; pet foods; and miscellaneous and specialty products. EPA concluded that the major parameters of significance discharged from this industry were conventional parameters (BOD<sub>5</sub>, TSS, oil and grease, and pH) and that such discharges did not contain toxic pollutants (U.S. EPA, 1975a; U.S. EPA, 1975b). While EPA recommended establishing effluent guidelines limitations for conventional parameters from direct dischargers in certain subcategories, it did not recommend pretreatment standards for indirect dischargers because it concluded that none of the constituents in miscellaneous foods and beverage wastewaters would interfere with or pass through a POTW (U.S. EPA, 1975a). EPA did not continue its efforts to establish ELGs for this category because it changed the focus of its ELGs program to toxics shortly after completion of its analysis of this industry.

For purposes of assessing whether to identify the miscellaneous foods and beverages industry as a potential new category in the 2006 Plan, EPA again reviewed the discharges from this industry to determine whether ELGs would be an appropriate tool for addressing the hazard associated with this industry, as discussed below.

### **20.2.1 Summary of Comments Received**

In response to the Preliminary 2004 Plan, the Natural Resources Defense Council (NRDC) commented that EPA should identify the following industries in the Plan as new categories for effluent guidelines rulemaking: SIC code 2075: Soybean Oil Mills, SIC code 2082: Malt Beverages, and SIC code 2085: Distilled and Blended Liquors (EPA-HQ-OW-2003-0074-0733).

### **20.2.2 Industry Profile**

In reviewing data for the industries identified by NRDC, EPA identified additional industries related to food processing that are not covered by existing ELGs. In total, EPA found 26 SIC codes that could properly be considered part of a potential new Miscellaneous Foods and Beverages Category. Table 20-6 lists the counts of facilities in the 26 SIC codes from data in the U.S. Census (2002), TRI (2002 and 2003), and PCS (2002). The U.S. Census shows 127,000 establishments in the miscellaneous foods and beverages industry in 2002; however, less than 1 percent reported to TRI (0.286 percent) and PCS (0.097 percent).

**Table 20-6. Number of Facilities in Miscellaneous Foods and Beverages SIC Codes**

| SIC Code  | 2002 Census Data   | 2002 PCS <sup>b</sup>            | 2002 TRI <sup>c</sup> | 2003 TRI <sup>c</sup> |
|---|--------------------|----------------------------------|-----------------------|-----------------------|
| 2032: Canned Specialties                              | 1,804              | 7                                | 11                    | 14                    |
| 2034: Dehydrated Fruits, Vegetables, Soups            | 2,196              | 2                                | 9                     | 9                     |
| 2038: Frozen Specialties, NEC                         | 415                | 4                                | 26                    | 25                    |
| 2051: Bread & Other Bakery Products                   | 3,305 <sup>a</sup> | 3                                | 7                     | 9                     |
| 2052: Cookies & Crackers                              |                    | 3                                | 17                    | 14                    |
| 2053: Frozen Bakery Products                          | 259                | 1                                | 7                     | 6                     |
| 2064: Candy & Other Confection Products               | 1,602              | 1                                | 5                     | 6                     |
| 2066: Chocolate & Cocoa Products                      | 1,234              | 3                                | 4                     | 5                     |
| 2067: Chewing Gum                                     | 518                | 2                                | 1                     | 1                     |
| 2068: Salted & Roasted Nuts & Seeds                   | 163                | 1                                | 0                     | 0                     |
| 2074: Cottonseed Oil Mills                            | 341 <sup>a</sup>   | 2                                | 15                    | 14                    |
| 2075: Soybean Oil Mills                               |                    | 15                               | 60                    | 57                    |
| 2076: Vegetable Oil Mills, Except Corn                |                    | 2                                | 8                     | 10                    |
| 2079: Shortening, Table Oils, Margarine               |                    | 3                                | 22                    | 17                    |
| 2082: Malt Beverages                                  | 682                | 10                               | 22                    | 23                    |
| 2083: Malt  | 27                 | 1                                | 2                     | 2                     |
| 2084: Wines, Brandy & Brandy Spirit                   | 1,271 <sup>a</sup> | 3                                | 15                    | 13                    |
| 2085: Distilled, Rectified, & Blended Liquors         |                    | 28                               | 6                     | 6                     |
| 2086: Bottled & Canned Soft Drinks & Carbonated Water | 764                | 7                                | 31                    | 23                    |
| 2087: Flavor Extract & Flavor Syrups, NEC             | 2,425              | 7                                | 16                    | 15                    |
| 2095: Roasted Coffee                                  | 281                | 1                                | 2                     | 2                     |
| 2097: Manufactured Ice                                | 492                | 2                                | 10                    | 6                     |
| 2098: Macaroni, Spaghetti, Vermicelli, Noodles        | 193                | 3                                | 1                     | 1                     |
| 2099: Food Preparations, NEC                          | 4,602              | 9                                | 65                    | 51                    |
| 5144: Poultry & Poultry Products                      | 39,425             | 1                                | 1                     | 1                     |
| 5182: Wine & Distilled Alcoholic Beverages            | 64,637             | 2                                | 0                     | 0                     |
| <b>Total</b>  | <b>127,000</b>     | <b>123</b><br><b>(13 majors)</b> | <b>363</b>            | <b>330</b>            |

Source: 2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations Guidelines and Standards (U.S. EPA, 2005); U.S. Economic Census (U.S. Census, 2002).

<sup>a</sup>Due to the poor bridging between NAICS and SIC codes, the number of facilities for certain SIC codes could not be determined for the 2002 Census.

<sup>b</sup>Major and minor dischargers.

<sup>c</sup>Releases to any media.

EPA obtained data on the number of facilities reporting direct and indirect discharges from the miscellaneous foods and beverages industry from *TRIRelases2002\_v4*. Table 20-7 presents the number of facilities in the TRI database, by discharge type. Less than 1 percent of the facilities in the miscellaneous foods and beverages industry report to TRI. Of these, approximately 58 percent report no water discharge, 37 report discharges to POTWs, and 5 percent report discharges to surface water. As shown in Table 20-6 above, 123 facilities report direct discharges to PCS.

**Table 20-7. Miscellaneous Foods and Beverages Facilities by Type of Discharge Reported in TRI 2002**

| SIC Code                          | Reported Only Direct Discharges | Reported Only Indirect Discharges | Reported Both Direct and Indirect Discharges | Reported No Water Discharges |
|-----------------------------------|---------------------------------|-----------------------------------|--|------------------------------|
| Miscellaneous Foods and Beverages | 14                              | 130                               | 10   | 209                          |

Source: *TRIRelases2002\_v4*.

### 20.2.3 Wastewater Characteristics

Table 20-8 summarizes the pollutant loads data for the miscellaneous foods and beverages industry from *TRIRelases2003\_v02*, *TRIRelases2002\_v04*, and *PCSLoads2002\_v04*.

**Table 20-8. Summary of Data for the Miscellaneous Foods and Beverages Industry**

| Data Source           | Number of Facilities Reporting Discharges Greater than Zero | Annual Pounds | Annual TWPE | Annual TWPE/Facility |
|-----------------------|---|---------------|-------------|----------------------|
| TRI 2003 <sup>a</sup> | 158   | 5,560,000     | 5,440       | 34.5                 |
| TRI 2002 <sup>a</sup> | 154   | 5,390,000     | 6,860       | 44.6                 |
| PCS 2002 <sup>b</sup> | 13  | 16,200,000    | 337,000     | 168,000              |

Source: *TRIRelases2002\_v4*; *PCSLoads2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>Includes transfers to POTWs and account for POTW removals.

<sup>b</sup>Includes major dischargers only.

Table 20-9 lists the pollutant loads data in *PCSLoads2002\_v4*, *TRIRelases2002\_v04*, and *TRIRelases2003\_v02* by SIC code. The facility-specific TWPEs are generally low (e.g. using TRI 2000 data, the average TWPE/facility for each SIC code is approximately 17). EPA's literature review and its earlier consideration of this industry support these data. Although the available quantitative data are limited, based on available literature and its previous study, EPA would expect a low level of toxics in the wastewaters from the miscellaneous foods and beverages industry. The pollutants expected in greatest quantities include BOD, TSS, and oil and grease. Possible other wastewater pollutants from this industry may include organics, nutrients, suspended solids, dissolved solids (including chlorides), solvents, detergents, and pesticides originating from the processing of the foods and beverages and the cleaning of process equipment (U.S. EPA, 1975; EBRD, 2006; UNEP, 2004; Triangular Wave, 2006).

Table 20-10 lists the pollutants of concern identified for the miscellaneous foods and beverages industry based on reported discharges to PCS and TRI. The top industry pollutant as reported in PCS in 2002 is sulfide. One facility within SIC code 2085 contributes 100 percent of the industry sulfide TWPE. The top two industry pollutants as reported to TRI in 2002 and 2003 are nitrate compounds and chlorine. The majority of the TWPE for these pollutants results from facilities within SIC codes 2075 and 2082. Due to the higher TWPE contributions from SIC code 2075, 2082, and 2085 (see Table 20-4 for total TWPE contributions from these SIC codes), and relatively low TWPE of the other SIC codes, the remainder of this section focuses on these three SIC codes.

#### **20.2.4 SIC Code 2075: Soybean Oil Mills**

Establishments included in SIC code 2075 are primarily engaged in manufacturing the following soybean products:

- Lecithin, soybean;
- Soybean flour and grits;
- Soybean oil, cake, and meal;
- Soybean oil, deodorized;
- Soybean protein concentrates; and
- Soybean protein isolates.

Establishments in this SIC code also process purchased soybean oil into products other than edible cooking oils. Establishments primarily engaged in refining soybean oil into edible cooking oils are classified under SIC code 2079: Shortening, Table Oils, Margarine (Bicknell, 2004).

At soybean oil mills raw soybeans are processed into soybean products. Soybeans are dehulled, cooked and flaked, then crushed and subjected to direct solvent extraction to produce two types of products, soybean oil and soybean meal and cakes. Solvent is removed from the meal by steam (vapor) stripping followed by toasting. Solvent is recovered from the oil by evaporation followed by steam stripping (Bicknell, 2004).

Table 20-9. TRI and PCS Data Listing for Miscellaneous Foods and Beverages SIC Codes

| SIC Code    | PCS 2002                    |                    |                      |               | TRI 2002       |                  |              |               | TRI 2003       |                  |              |               |
|-------------|-----------------------------|--------------------|----------------------|---------------|----------------|------------------|--------------|---------------|----------------|------------------|--------------|---------------|
|             | Facility Count <sup>b</sup> | Total Pounds       | TWPE                 | TWPE/Facility | Facility Count | Total Pounds     | TWPE         | TWPE/Facility | Facility Count | Total Pounds     | TWPE         | TWPE/Facility |
| 2032        |                             |                    |                      |               | 7              | 51,900           | 40.3         | 5.75          | 10             | 74,500           | 57           | 5.72          |
| 2034        |                             |                    |                      |               | 2              | 149              | 1.88         | 0.939         | 1              | 72.9             | 1.55         | 1.55          |
| 2038        |                             |                    |                      |               | 13             | 49,100           | 51.6         | 3.97          | 12             | 45,800           | 49.6         | 4.13          |
| 2051        |                             |                    |                      |               | 1              | 0.000174         | 0.00741      | 0.00741       | 3              | 4,220            | 4.69         | 1.56          |
| 2052        |                             |                    |                      |               | 1              | 220              | 0.24         | 0.244         | 1              | 220              | 0.244        | 0.244         |
| 2053        |                             |                    |                      |               | 3              | 7,810            | 8.70         | 2.90          | 4              | 4,830            | 4.02         | 1.01          |
| 2064        |                             |                    |                      | 0             | 4              | 42,300           | 31.6         | 7.89          | 5              | 68,400           | 53.8         | 10.8          |
| 2066        |                             |                    |                      |               | 2              | 2,130            | 2.06         | 1.03          | 2              | 1,950            | 1.88         | 0.942         |
| 2067        | 1                           | 180,000            | 0 <sup>a</sup>       |               |                |                  |              |               |                |                  |              |               |
| 2074        |                             |                    |                      |               | 5              | 3.66             | 0.129        | 0.026         | 4              | 2.70             | 0.0951       | 0.0238        |
| <b>2075</b> | <b>1</b>                    | <b>1,220,000</b>   | <b>0<sup>a</sup></b> | <b>0</b>      | <b>42</b>      | <b>1,710,000</b> | <b>2,927</b> | <b>69.7</b>   | <b>40</b>      | <b>2,060,000</b> | <b>1,750</b> | <b>43.7</b>   |
| 2076        | 1                           | 12                 | 0 <sup>a</sup>       | 0             | 5              | 0.752            | 0.0265       | 0.00530       | 7              | 5,170            | 4.26         | 0.609         |
| 2079        |                             |                    |                      |               | 9              | 22,200           | 537          | 59.6          | 8              | 13,200           | 269          | 33.7          |
| <b>2082</b> | <b>3</b>                    | <b>1,630,000</b>   | <b>9,540</b>         | <b>3,150</b>  | <b>17</b>      | <b>3,129,000</b> | <b>2,356</b> | <b>139</b>    | <b>20</b>      | <b>2,620,000</b> | <b>1,980</b> | <b>98.9</b>   |
| 2083        |                             |                    |                      |               | 1              | 1,000            | 1.11         | 1.11          | 1              | 1,150            | 1.28         | 1.28          |
| 2084        |                             |                    |                      |               | 2              | 40,900           | 45.4         | 22.7          | 2              | 290,000          | 322          | 161           |
| <b>2085</b> | <b>7</b>                    | <b>159,000,000</b> | <b>327,000</b>       | <b>46,800</b> | <b>2</b>       | <b>3,870</b>     | <b>58.7</b>  | <b>29.4</b>   | <b>2</b>       | <b>5,330</b>     | <b>69.1</b>  | <b>34.5</b>   |
| 2086        |                             |                    |                      |               | 6              | 37,800           | 38.6         | 6.43          | 4              | 43,100           | 47.8         | 12.0          |
| 2087        |                             |                    |                      |               | 5              | 25,800           | 18.6         | 3.71          | 7              | 69,000           | 73.5         | 10.5          |
| 2095        |                             |                    |                      |               | 2              | 31,800           | 432          | 216           | 2              | 37,900           | 484          | 242           |
| 2097        |                             |                    |                      |               | 1              | 2,140            | 2.37         | 2.37          |                |                  |              |               |
| 2099        |                             |                    |                      |               | 23             | 236,000          | 308          | 13.4          | 22             | 209,000          | 272          | 12.4          |
| 5144        |                             |                    |                      |               | 1              | 16.0             | 0.0119       | 0.0119        | 1              | 15.9             | 0.0119       | 0.0119        |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>There is no TWPE associated with the pollutants in PCS for the SIC code.

<sup>b</sup>Major dischargers only.

Blanks indicate that the databases contain no data for the SIC code. **Bold indicates SIC codes contributing the majority of the total industry TWPE.**

Table 20-10. Pollutants of Concern for the Miscellaneous Foods and Beverages Industry

| Pollutant                   | 2002 PCS   |                       |         | 2002 TRI   |                       |                | 2003 TRI   |                       |              |
|-----------------------------|--|-----------------------|---------|--|-----------------------|----------------|--|-----------------------|--------------|
|                             | Number of Facilities Reporting Pollutant <sup>a</sup>            | Total Pounds Released | TWPE    | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE           | Number of Facilities Reporting Pollutant                         | Total Pounds Released | TWPE         |
| Sulfide                     | 1  | 112,074               | 313,970 | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |              |
| Chlorine                    | 2  | 17,722                | 9,023   | 4  | 3,780                 | 1,925          | 3  | 423                   | 215          |
| Copper                      | 2  | 9,373                 | 5,950   | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |              |
| Manganese                   | 2  | 21,553                | 1,518   |  |                       |                |  |                       |              |
| TKN                         | 2  | 551,783               | 1,258   |  |                       |                |  |                       |              |
| Nitrate Compounds           | Pollutants are not in the top five PCS 2002 reported pollutants. |                       |         | 29   | 4,959,303             | 3,703          | 32   | 4,840,031             | 3,614        |
| Propylene Oxide             |  |                       |         | 2  | 19,850                | 421            | 2  | 22,109                | 469          |
| Ammonia                     |  |                       |         | 51   | 337,301               | 374            | 58   | 611,879               | 679          |
| Nickel and Nickel Compounds |  |                       |         | 10   | 1,994                 | 217            | Pollutants are not in the top five TRI 2003 reported pollutants. |                       |              |
| N-Hexane                    |  |                       |         | Pollutants are not in the top five TRI 2002 reported pollutants. |                       |                | 48   | 3,898                 | 137          |
| <b>Industry Total</b>       |  |                       |         | <b>13</b>  | <b>161,581,216</b>    | <b>336,924</b> | <b>154</b>   | <b>5,391,632</b>      | <b>6,862</b> |

Source: PCSLoads2002\_v4; TRIReleases2002\_v4; TRIReleases2003\_v2.

<sup>a</sup>Discharges include only majors.

Conventional wastewater pollutants from this industry include BOD, suspended solids, and fats, oils, and greases. Soybean oil mills employ conventional biological wastewater treatment preceded by oil/water separation of high oil concentration wastewaters (Bicknell, 2004).

Table 20-11 lists the pollutants of concern based on data from *TRIRelases2003\_v2* and *TRIRelases2002\_v4* for SIC code 2075. For this SIC code, the total TWPE from data in *PCSLoads2002\_v4* is zero, and EPA has PCS data for only one major discharger. As a result, EPA excluded PCS data from Table 20-6.

**Table 20-11. Pollutants of Concern for the Miscellaneous Foods and Beverages Industry, SIC Code 2075: Soybean Oil Mills**

| Pollutants with Greatest TWPE     | TRI 2003           |                                       | TRI 2002           |                                       |
|-----------------------------------|--------------------|---------------------------------------|--------------------|---------------------------------------|
|                                   | Annual TWPE        | Percent of SIC Code Total Annual TWPE | Annual TWPE        | Percent of SIC Code Total Annual TWPE |
| Chlorine                          | NR                 | NA                                    | 1,553 <sup>a</sup> | 53.0%                                 |
| Nitrate Compounds                 | 1,514 <sup>b</sup> | 86.6%                                 | 1,250              | 42.7%                                 |
| N-Hexane                          | 137                | 7.8%                                  | 22                 | 0.8%                                  |
| Nickel and Nickel Compounds       | 57.4               | 3.3%                                  | 65.6               | 2.2%                                  |
| Ammonia                           | 30.0               | 1.7%                                  | 29.4               | 1.0%                                  |
| Sodium Nitrite (as N)             | 10.2               | 0.6%                                  | 7.1                | 0.2%                                  |
| <b>SIC Code Total Annual TWPE</b> | <b>1749.1</b>      | <b>NA</b>                             | <b>2927.4</b>      | <b>NA</b>                             |

Source: *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>TWPE result from one facility: Bunge Milling, Inc., Danville, IL, TRI Facility ID: 61832-LHFFG-321EA.

<sup>b</sup>99.8% of TWPE results from one facility: Solae L.L.C., Pryor, Oklahoma, TRI Facility ID: 74362-PRTNT-HUNTS

NA – Not applicable.

NR – Not reported.

Based on data from *TRIRelases2002\_v4*, all of the chlorine TWPE for SIC code 2075 is from one facility, Bunge Milling, Inc., Danville, IL, TRI Facility ID: 61832-LHFFG-321EA. This facility did not report any TRI chemical releases to water in 2003.

Nitrate compounds are the greatest contributor to the TWPE for this SIC code. Based on data from *TRIRelases2003\_v2*, 99.8 percent of the nitrate compounds TWPE results from one facility, Solae L.L.C., Pryor, Oklahoma, TRI Facility ID: 74362-PRTNT-HUNTS.

### 20.2.5 SIC Code 2082: Malt Beverages

Establishments included in SIC code 2082 are primarily engaged in manufacturing the following malt beverages:

- Ale;
- Beer (alcoholic beverage);
- Brewers' grain;
- Liquors, malt;
- Malt extract, liquors, and syrups;
- Near beer (nonalcoholic beverage);
- Porter (alcoholic beverage); and
- Stout (alcoholic beverage).

The malt beverage industry uses the following basic unit processes: grinding of rice, corn, and malt (soaked and germinated grain); brewing (cooking); filtration; fermenting; aging; vessel clean-up; and packaging (Bicknell, 2004).

Conventional wastewater pollutants from this industry include BOD, and suspended solids. Malt beverages processing plants employ conventional biological wastewater treatment. Spent grain (mash) is typically recovered for use as animal feed (Bicknell, 2004).

Table 20-12 lists the pollutants of concern based on data from *TRIRelases2003\_v2*, *TRIRelases2002\_v4*, and *PCSLoads2002\_v4* for SIC code 2082.

Based on data from *PCSLoads2002\_v4*, all of the chlorine TWPE is discharged from one facility, the Miller Brewing Company, Eden, NC, NPDES ID: NC0029980. Likely, the facility adds chlorine as a disinfectant for water treatment.

Nitrate compounds contribute over 97 percent of the TPWE for SIC code 2982. Based on data from *TRIRelases2002\_v4*, 94.2 percent of the nitrate compounds TWPE results from one facility: Anheuser-Busch, Inc., Baldwinsville, NY, TRI Facility ID: 13027-NHSRB-2885B.

**Table 20-12. Pollutants of Concern for the Miscellaneous Foods and Beverages Industry, SIC Code 2082: Malt Beverages**

| Pollutants with Greatest TWPE     | Data Source Used for Identification | TRI 2003             |                                       | 2002 Data            |                                       |
|-----------------------------------|-------------------------------------|----------------------|---------------------------------------|----------------------|---------------------------------------|
|                                   |                                     | Annual TWPE          | Percent of SIC Code Total Annual TWPE | Annual TWPE          | Percent of SIC Code Total Annual TWPE |
| Nitrate Compounds                 | TRI                                 | 1,928.0 <sup>a</sup> | 97.4%                                 | 2,301.6 <sup>a</sup> | 97.7%                                 |
| Ammonia                           | TRI                                 | 44.6                 | 2.3%                                  | 49.6                 | 2.1%                                  |
| Sodium Nitrite                    | TRI                                 | 6.0                  | 0.3%                                  | 5.3                  | 0.2%                                  |
| <b>SIC Code Total Annual TWPE</b> | <b>TRI</b>                          | <b>1978.6</b>        | <b>NA</b>                             | <b>2356.6</b>        | <b>NA</b>                             |
| Chlorine                          | PCS                                 | NA                   | NA                                    | 8,995.2 <sup>b</sup> | 94.3                                  |
| Nitrite/Nitrate (as N)            | PCS                                 | NA                   | NA                                    | 291.4                | 3.1                                   |
| Copper                            | PCS                                 | NA                   | NA                                    | 85.0                 | 0.9                                   |
| Nitrogen, Ammonia                 | PCS                                 | NA                   | NA                                    | 84.8                 | 0.9                                   |
| Zinc                              | PCS                                 | NA                   | NA                                    | 54.2                 | 0.6                                   |
| Fluoride                          | PCS                                 | NA                   | NA                                    | 14.8                 | 0.2                                   |
| Cyanide                           | PCS                                 | NA                   | NA                                    | 7.4                  | 0.1                                   |
| <b>SIC Code Total Annual TWPE</b> | <b>PCS</b>                          | <b>NA</b>            | <b>NA</b>                             | <b>9537.5</b>        | <b>NA</b>                             |

Source: *PCSLoads2002\_v4*; *TRIRelases2002\_v4*; *TRIRelases2003\_v2*.

<sup>a</sup>94.2% of TWPE result from one facility: Anheuser-Busch, Inc., Baldwinsville, NY, TRI Facility ID: 13027-NHSRB-2885B.

<sup>b</sup>TWPE result from one facility: Miller Brewing Company, Eden, NC, NPDES ID: NC0029980

NA – Not available.

### 20.2.6 SIC Code 2085: Distilled, Rectified, and Blended Liquors

Establishments included in SIC code 2085 are primarily engaged in the following processes: manufacturing alcoholic liquors by distillation; and manufacturing cordials and alcoholic cocktails by blending processes or mixing liquors and other ingredients (Bicknell, 2004).

The distilled and blended liquors industry uses the following basic unit processes: milling of grain and malt (soaked and germinated grain); cooking; cooling; filtration; fermenting; distillation; aging; vessel clean-up; and packaging. Cordials and liqueurs are manufactured by blending liquors with other ingredients, such as fruit syrups (Bicknell, 2004).

Conventional wastewater pollutants from this industry include BOD and suspended solids. Molasses distillery wastes include nitrogen and phosphates. Distilled and blended liquor facilities typically employ conventional biological wastewater treatment (Bicknell, 2004).

Table 20-13 lists the pollutants of concern based on data from *PCSLoads2002\_v4* for SIC code 2085. For this SIC code, the total TWPE from data in *TRIRelases2002\_v4* and *TRIRelases2003\_v2* is less than 70. As a result, EPA excluded TRI data from Table 20-13.

**Table 20-13. Pollutants of Concern for the Miscellaneous Foods and Beverages Industry, SIC Code 2085: Distilled, Rectified, and Blended Liquors**

| Pollutants with Greatest TWPE     | PCS 2002               |                                       |
|-----------------------------------|------------------------|---------------------------------------|
|                                   | Annual TWPE            | Percent of SIC Code Total Annual TWPE |
| Sulfide                           | 313,970.1 <sup>a</sup> | 95.9%                                 |
| Copper                            | 5,864.9                | 1.8%                                  |
| Manganese                         | 1,517.4                | 0.5%                                  |
| Nitrogen, Kjeldahl Total (As N)   | 1,255.9                | 0.4%                                  |
| Phenol & Phenolics                | 1,012.0                | 0.3%                                  |
| Silver                            | 803.4                  | 0.2%                                  |
| Cadmium                           | 680.6                  | 0.2%                                  |
| Zinc                              | 464.3                  | 0.1%                                  |
| Fluoride                          | 428.8                  | 0.1%                                  |
| Thallium                          | 389.3                  | 0.1%                                  |
| Lead                              | 355.2                  | 0.1%                                  |
| Arsenic                           | 210.7                  | 0.1%                                  |
| Selenium                          | 207.3                  | 0.1%                                  |
| <b>SIC Code Total Annual TWPE</b> | <b>327,357</b>         | <b>NA</b>                             |

Source: *PCSLoads2002\_v04*.

<sup>a</sup>TWPE results from one facility: Bacardi Corporation, Puerto Rico, NPDES ID: PR0000591

NA – Not available.

Based on data from *PCSLoads2002\_v4*, over 95 percent of the total SIC code total annual TWPE is from sulfide discharges from one facility, the Bacardi Corporation, Puerto Rico, NPDES ID: PR0000591. EPA reviewed the permit limits and monthly reporting data of the Bacardi facility and contacted both the facility and the EPA Region 2 office regarding Bacardi's discharges.

The Region 2 office identified that the Bacardi facility discharges sulfide, BOD, oil and grease, and other pollutants at levels exceeding permit limits. It currently operates an anaerobic system for treatment of its wastewaters prior to discharge. The Bacardi facility is under a compliance schedule to meet the sulfide limit of 2 ug/L, which is a water quality-based limit. This compliance schedule will expire soon. The Bacardi facility has requested that the Puerto Rico Environmental Quality Board consider a change in the sulfide limit that takes into account mixing zone implications (Matuszko, 2006a). Based on a previous Caribbean Rum Study and recent NPDES permits for similar facilities, the Bacardi facility is the only known rum producer that discharges directly to waters of the U.S. and employs an anaerobic treatment system. Because sulfide is produced during anaerobic treatment, EPA concludes that its sulfide discharges are unique and not representative of other facilities in this sector.

### 20.2.7 Summary of Review of Miscellaneous Foods and Beverages Industry

EPA previously considered establishing ELGs for the miscellaneous foods and beverages industry in the 1970s. EPA did not establish ELGs for this industry at that time because of the relatively low amounts of toxics in wastewater discharges associated with this industry and its conclusion that constituents in miscellaneous foods and beverage wastewaters would not interfere with or pass through a POTW.

Based on its review of current available data and literature, EPA again found that discharges from miscellaneous foods and beverages are primarily comprised of conventional pollutants (BOD<sub>5</sub>, TSS, and Oil and Grease) and contain few toxics. Therefore, the overall hazard associated with this industry (as measured in TWPE) is low.

The bulk of the hazard (measured as TWPE) reported to TRI and PCS from wastewater discharges associated with this industry are from five facilities discharging nitrate compounds, chlorine, and sulfide.

- Two facilities (Solae L.L.C. in SIC code 2075, Anheuser-Busch in SIC code 2082) account for almost all of the TWPE associated with nitrate compounds reported to TRI.
- Two facilities (Bunge Milling, Inc. in SIC code 2075, Miller Brewing Co. in SIC code 2082) account for almost all of the TWPE associated with chlorine reported to TRI in 2002 – with the Bunge Milling facility reporting no water discharges to the 2003 TRI.
- One facility (Bacardi Corp. in SIC code 2085) accounts for nearly all the sulfide TWPE in *PCSLoads2002\_v04*. EPA concluded these sulfide discharges are unique to the wastewater treatment system at Bacardi and not representative of other facilities in this sector.

Because of the low overall hazard associated with discharges from this industry, Miscellaneous Foods and Beverages does not constitute a priority for effluent guidelines rulemaking at this time. Moreover, because of the small number of facilities accounting for the toxics, EPA believes that site-specific effluent limits established by permit writers on a BPJ basis are an appropriate tool to address discharges from this industry at this time. For the reasons discussed in Section 20.1.5 of this TSD, EPA believes that Section 304(m)(1)(B) gives EPA the discretion to identify in the Plan only those new categories for which EPA believes an effluent guideline may be an appropriate tool. See *Norton v. Southern Utah Wilderness Alliance*, 542 US 55, 70 (2004) (holding that a broad statutory mandate is not sufficient to constrain an Agency's discretion over its internal planning processes).

### 20.3 References

A.G. Edwards. 2005. LNG: Filling the Long-Term U.S. Supply Gap. Available online at: <http://agedwards.com/>. (June 14). EPA-HQ-OW-2004-0002, DCN 9-3560.

- Bicknell, Betsy, et al. 2004. Eastern Research Group, Inc. Memorandum to U.S. EPA. “Background on Commenter-Identified New Point Source Categories.” (June 11). DCN 00801.
- Brinkman, P.E. 2005. Letter from Pearl Crossing LNG Terminal, LLC, to Robert D. Lawrence, U.S. EPA Region 6. (October 19). EPA-HQ-OW-2004-0002, DCN 9-3576.
- California Energy Commission. 2006. West Coast LNG Projects and Proposals. (October 20). Available on-line at: <http://www.energy.ca.gov/lng/projects.html>.
- Chinloy, Richard. 2005. “Financing LNG Receiving Terminals.” Presented at LNG Access Workshop, Sacramento, CA. (June 1 and 2). EPA-HQ-OW-2004-0002, DCN 9-3506.
- Citigroup Smith Barney. 2004. LNG in North America. (August 27). EPA-HQ-OW-2004-0002, DCN 9-3561.
- Cornelius. 2006. Letter from S.L. Cornelius, President, ConocoPhillips Global Gas, to Admiral Thad W. Allen, Commandant, U.S. Coast Guard. (November 3). USCG-2005-21232-237. Available on-line at: <http://dms.dot.gov/search/searchFormSimple.cfm>.
- Credit Suisse First Boston. 2005. Gas Insights: LNG to the Rescue for Gas Consumers. (September 21). EPA-HQ-OW-2004-0002, DCN 9-3558.
- Deutsche Bank. 2005. Global LNG: Waiting for the Cavalry. (December 5). EPA-HQ-OW-2004-0002, DCN 9-3559.
- EBRD. 2006. European Bank for Reconstruction and Development. Sub-Sectoral Environmental Guidelines. Available online at: <http://www.ebrd.com/about/policies/enviro/sectoral/food.pdf>. Date accessed: September, 2006. DCN 03885.
- Economides, M.J. 2005. “The Economics of Gas to Liquids Compared to Liquefied Natural Gas.” World Energy Magazine. 8(1):136-140. Available online at: <http://www.worldenergysource.com/articles%2Fpdf%2Feconomides%5FWE%5Fv8n1%2Epdf>. Date Accessed: October 2006. EPA-HQ-OW-2004-0002, DCN 9-3568.
- EIA. 2003. Energy Information Administration, U.S. Department of Energy. *The Global Liquefied Natural Gas Market: Status and Outlook*. (December). Available online at: [http://www.eia.doe.gov/oiaf/analysispaper/global/pdf/eia\\_0637.pdf](http://www.eia.doe.gov/oiaf/analysispaper/global/pdf/eia_0637.pdf). EPA-HQ-OW-2004-0002, DCN 9-3565.
- EIA. 2004. Energy Information Administration, U.S. Department of Energy. *U.S. LNG Markets and Uses: June 2004 Update*. (June). Available online at: [http://www.eia.doe.gov/pub/oil\\_gas/natural\\_gas/feature\\_articles/2004/lng/lng2004.pdf](http://www.eia.doe.gov/pub/oil_gas/natural_gas/feature_articles/2004/lng/lng2004.pdf). EPA-HQ-OW-2004-0002, DCN 9-3553.
- EIA. 2006a. Energy Information Administration, U.S. Department of Energy. *Annual Energy Outlook*. Available online at: [www.eia.doe.gov/oiaf/aeo/pdf/trend\\_4.pdf](http://www.eia.doe.gov/oiaf/aeo/pdf/trend_4.pdf). EPA-HQ-OW-2004-0002, DCN 9-3501.

EIA. 2006b. Energy Information Administration, U.S. Department of Energy. *U.S. Natural Gas Importers by Point of Entry: Liquefied Natural Gas Volumes*. Available online at: [http://www.tonto.eia.doe.gov/dnav/ng/ng\\_move\\_poe1\\_a\\_EOG0\\_IML\\_Mmcf\\_a.htm](http://www.tonto.eia.doe.gov/dnav/ng/ng_move_poe1_a_EOG0_IML_Mmcf_a.htm)[http://www.pahandleenergy.com/newsreleases\\_dtl.asp?page=NR\\_040506.htm](http://www.pahandleenergy.com/newsreleases_dtl.asp?page=NR_040506.htm). EPA-HQ-OW-2004-0002, DCN 9-3500.

El Paso Energy Bridge GOM, LLC. 2002. Application for Deepwater Port License. (December 20). Available online at: [http://dmses.dot.gov/docimages/pdf84/219001\\_web.pdf](http://dmses.dot.gov/docimages/pdf84/219001_web.pdf).

ENR. 2006. “\$3 Billion Project Planned to Move Rockies Gas East.” *Engineering News Record*. (February 13). EPA-HQ-OW-2004-0002, DCN 9-3502.

ERG. 2006. Eastern Research Group, Inc. Memorandum to Carey Johnston, U.S. EPA. “LNG Re-gasification Projections.” (January 6). EPA-HQ-OW-2004-0002, DCN 9-3510.

Excelerate Energy, LLC. 2005. Exclerate Energy Announces the Successful Innauguration of the Energy Bridge™ System and Commercial Operation of a New Generation of LNG Technology. (April 5). EPA-HQ-OW-2004-0002, DCN 9-3520.

FERC. 2004. U.S. Federal Energy Regulatory Commission. LNG Briefing. (April). Available online at: <http://www.ferc.gov/for-citizens/lng-briefing.pps>. EPA-HQ-OW-2004-0002, DCN 9-3555.

FERC. 2006a. U.S. Federal Energy Regulatory Commission. Existing LNG Terminals. (October 19). Available online at: <http://www.ferc.gov/industries/lng/indus-act/terminals/exist-term/lake-charles.asp>. (update version of EPA-HQ-OW-2004-0002, DCN 9-3596).

FERC. 2006b. Southern LNG Files for Expansion of Elba Island Storage and Sendout Capacity. (October 10). FERC Docket No. CP06-470-000. Available online at <http://elibrary.ferc.gov/idmws/common/opennat.asp?fileID=11159659>.

FERC. 2006c. U.S. Federal Energy Regulatory Commission. Existing LNG Terminals. (October 19). Available online at: <http://www.ferc.gov/industries/lng/indus-act/terminals/exist-term/everett.asp>. (updated version of EPA-HQ-OW-2004-0002, DCN 9-3548).

Flower, Andy. 2006a. E-mail communication between Andy Flower and Karrie-Jo Shell, U.S. EPA Region 4. (May 8). EPA-HQ-OW-2004-0002, DCN 9-3604.

Flower, Andy. 2006b. Spreadsheet attachment to E-mail communication between Andy Flower and Karrie-Jo Shell, U.S. EPA Region 4. (May 8). EPA-HQ-OW-2004-0002, DCN 9-3605.

Gold, Russell. 2005. “Bidding War Chills U.S. Plan to Import Natural Gas.” *The Wall Street Journal*. (December 19). Available online at: <http://www.postgazette.com/pg/05353/624855.stm>. EPA-HQ-OW-2004-0002, DCN 9-3507.

GPO. 2005. Government Printing Office. *Economic Report of the President*. Available online at: [http://www.gpoaccess.gov/eop/2005/2005\\_erp.pdf](http://www.gpoaccess.gov/eop/2005/2005_erp.pdf). EPA-HQ-OW-2004-0002, DCN 9-3557.

Greenspan. 2005. Remarks by Chairman Alan Greenspan. (April 5). Available online at: <http://www.federalreserve.gov/boarddocs/speeches/2005/20050405/default.htm>. EPA-HQ-OW-2004-0002, DCN 9-3562.

GSI. 2005. Gas Technology Institute. LNG World Trade, 2005. EPA-HQ-OW-2004-0002, DCN 9-3586

Henry, Larry R. 2003. Email to Carey Johnston, U.S. EPA, from Larry R. Henry, Chevron Texaco. "SIC Code 1321 and Natural Gas Processing." (May 24). EPA-HQ-OW-2003-0074, DCN 01123.

Johnston, Carey. 2004. U.S. EPA. Memorandum to the Public Record for the Effluent Guidelines Program Plan for 2004/2005. "Overview of Liquefied Natural Gas (LNG) Import Terminals For CWA Section 304(m) Effluent Guidelines Planning." (August 19). EPA-HQ-OW-2003-0074, DCN 01227.

Kelly, Suedeen G. 2004. "The Challenge of Natural Gas Interchangeability and Quality." Presented by Suedeen G. Kelly, Commissioner of the Federal Energy Regulatory Commission, to the Natural Gas Roundtable of Washington. Washington, D.C. (February 24). Available online at: <http://www.ferc.gov/press-room/sp-current/02-24-04-kelly.pdf>. EPA-HQ-OW-2004-0002, DCN 9-3554.

LNGLawblog.com. 2006a. U.S. LNG Imports Decline in First Quarter. (May 5). (citing Platts LNG Daily, May 4, 2006). Available online at: <http://www.lnglawblog.com/05052006decrease/>. EPA-HQ-OW-2004-0002, DCN 9-3508.

LNGLawblog.com. 2006b. Mexico May Export LNG to the U.S. (April 26). (citing Platts LNG Daily, April 25, 2006). EPA-HQ-OW-2004-0002, DCN 9-3504.

LNGLawblog.com. 2006c. Demand Reduction May Lead to Mexican Gas Exports to U.S. (May 3). (citing World Gas Intelligence, May 3, 2006). <http://www.lnglawblog.com/05032006mexico>. EPA-HQ-OW-2004-0002, DCN 9-3505.

LNGLawblog.com. 2006d. U.S. Sees Decreased LNG Imports in September. (September 28). (citing World Gas Intelligence, September 2006). Available online at: <http://www.lnglawblog.com/09282006spotmarket/>.

LNGLawblog, 2006e. Shortage of Natural Gas Leading to Inactive Liquefaction Projects. (October 18). (citing World Gas Intelligence, October 2006). Available at <http://lnglawblog.com/10182006feedstock>.

Martin, Phyllis, 2006. EIA. EIA's Current View on LNG Imports into the United States. Available online at: <http://www.eia.doe.gov/oiaf/aeo/conf/pdf/martin.pdf>. EPA-HQ-OW-2004-0002, DCN 9-3594.

Matuszko, Jan. 2006a. Memorandum to 2006 Effluent Guidelines Plan Record. “Telephone Conversations with John Chang-Chen, U.S. EPA Region II.” (September 7). DCN 03888.

Matuszko, Jan. 2006b. Memorandum to 2006 Effluent Guidelines Plan Record. “Commenter-Identified Industries Not Meeting 304(m)1(B) Criteria.” (December 1).

NGI. 2006. “Consultant Predicts ‘Great Shakeout’ in LNG Projects This Year or Early 2007.” (March 29). EPA-HQ-OW-2004-0002, DCN 9-3509.

North American National Gas Group. 2005. Northeast LNG Overview. (June 5). Available online at: <http://www.iroquois.com/new-Internet/igts/images/Northeast%20LNG.pdf>. EPA-HQ-OW-2004-0002, DCN 9-3537.

Pan EurAsian Enterprises, Inc. 2006. Special Summary Report: U.S Natural Gas and LNG Review for 2005. (March 8). EPA-HQ-OW-2004-0002, DCN 9-3521.

Panhandle Energy. 2006. Southern Union to Upgrade LNG Terminal. (April 5). Available online at: [http://www.panhandleenergy.com/newsreleases\\_dtl.asp?page=NR\\_040506.htm](http://www.panhandleenergy.com/newsreleases_dtl.asp?page=NR_040506.htm). EPA-HQ-OW-2004-0002, DCN 9-3597.

Poten & Partners, Inc. 2004. ChevTex Finalizes Capacity Deal at Sabine Pass. (December 23). EPA-HQ-OW-2004-0002, DCN 9-3513.

Rigzone. 2006. “U.S. LNG Proliferation Slowed by Global Competition, Market Dynamics,” [http://www.rigzone.com/news/article.asp?a\\_id=36181](http://www.rigzone.com/news/article.asp?a_id=36181). (September 15). DCN 3757.

Rosenberg, Martin. 2006. Building Up Gas. EnergyBiz Magazine. DCN 04081.

Smith, Lawrence, and Bennett, Jones. 2005. Deliverability of Supply Considerations for Imports of LNG through Canada and Mexico. Presented to California Energy Commission, Sacramento, CA. (June 2). Available online at: [http://www.energy.ca.gov/lng\\_docket/documents/2005-06-01\\_workshop/presentations\\_2005-06-02/Smith\\_Lawrence\\_2005-06-02.pdf](http://www.energy.ca.gov/lng_docket/documents/2005-06-01_workshop/presentations_2005-06-02/Smith_Lawrence_2005-06-02.pdf). EPA-HQ-OW-2004-0002, DCN 9-3503.

Triangular Wave. 2006. Triangular Wave Technologies, Inc. Chemical-Free Food Processing Treatment Applications. Available online at: <http://www.triangularwave.com/h12.htm>. Date accessed: September, 2006. DCN 03887.

U.S. Census. 2002. U.S. Economic Census. Available online at: <http://www.census.gov/econ/census02>.

U.S. EPA 1975a. *Draft Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Miscellaneous Foods and Beverages Point Source Category*. (February). DCN 04087.

U.S. EPA. 1975b. *Draft Development Document for Effluent Limitations Guidelines and New Source Performance Standards for the Addendum for the Hydrolyzed Vegetable Protein Segment of the Miscellaneous Foods and Beverages Point Source Category*. (May). DCN 02250.

U.S. EPA. 2004. *Technical Support Document for the 2004 Effluent Guidelines Program Plan*. EPA-821-R-04-014. Washington, DC. (August). DCN 01088.

U.S. EPA. 2005. *2005 Annual Screening-Level Analysis: Supporting the Annual Review of Existing Effluent Limitations Guidelines and Standards and Identification of New Point Source Categories for Effluent Limitations Guidelines and Standards*. EPA-821-B-05-003. Washington, DC. (August). DCN 02173.

U.S. EPA. 2006a. Memorandum from Benjamin H. Grumbles, Assistant Administrator for Water, to EPA Regional Administrators. “Deepwater Liquefied Natural Gas Terminals and Clean Water Act Technology-Based Limitations and Conditions.” (April 3). EPA-HQ-OW-2004-0002, DCN 9-3546.

U.S. EPA. 2006b. EPA Region 9, Fact Sheet for the Cabrillo Deepwater Port Project (Revised). (September 14). Available online at: <http://www.epa.gov/region9/liq-natl-gas/index.html>.

UNEP. 2004. United Nations Environment Programme. Fact Sheet 6: Food Manufacturing Series. (October 1). Available online at: <http://www.gpa.uq.edu.au/CleanProd/Res/facts/FACT6.htm>. Date accessed: September 2006. DCN 03886.

USCG. 2003. U.S. Coast Guard. Final Environmental Assessment of the El Paso Energy Bridge Gulf of Mexico LLC Deepwater Port License Application. (November). Available online at: [http://dmses.dot.gov/docimages/pdf88/261100\\_web.pdf](http://dmses.dot.gov/docimages/pdf88/261100_web.pdf).

Van Praet, Nicholas. 2004. “Next Best Thing to Oil.” *Montreal Gazette*. (September 18). Available online at: <http://www.energyprobe.org/energyprobe/print.cfm?ContentID=11441>. EPA-HQ-OW-2004-0002, DCN 9-3512.